



MachXO5-NX Family

Data Sheet

FPGA-DS-02102-2.3

July 2026

Disclaimers

Lattice makes no warranty, representation, or guarantee regarding the accuracy of information contained in this document or the suitability of its products for any particular purpose. All information herein is provided AS IS, with all faults, and all associated risk is the responsibility entirely of the Buyer. The information provided herein is for informational purposes only and may contain technical inaccuracies or omissions, and may be otherwise rendered inaccurate for many reasons, and Lattice assumes no obligation to update or otherwise correct or revise this information. Products sold by Lattice have been subject to limited testing and it is the Buyer's responsibility to independently determine the suitability of any products and to test and verify the same. LATTICE PRODUCTS AND SERVICES ARE NOT DESIGNED, MANUFACTURED, OR TESTED FOR USE IN LIFE OR SAFETY CRITICAL SYSTEMS, HAZARDOUS ENVIRONMENTS, OR ANY OTHER ENVIRONMENTS REQUIRING FAIL-SAFE PERFORMANCE, INCLUDING ANY APPLICATION IN WHICH THE FAILURE OF THE PRODUCT OR SERVICE COULD LEAD TO DEATH, PERSONAL INJURY, SEVERE PROPERTY DAMAGE OR ENVIRONMENTAL HARM (COLLECTIVELY, "HIGH-RISK USES"). FURTHER, BUYER MUST TAKE PRUDENT STEPS TO PROTECT AGAINST PRODUCT AND SERVICE FAILURES, INCLUDING PROVIDING APPROPRIATE REDUNDANCIES, FAIL-SAFE FEATURES, AND/OR SHUT-DOWN MECHANISMS. LATTICE EXPRESSLY DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY OF FITNESS OF THE PRODUCTS OR SERVICES FOR HIGH-RISK USES. The information provided in this document is proprietary to Lattice Semiconductor, and Lattice reserves the right to make any changes to the information in this document or to any products at any time without notice.

Contents

Contents	3
Acronyms in This Document	11
1. General Description	13
1.1. Features	15
2. Architecture	18
2.1. Overview	18
2.2. PFU Blocks	22
2.3. Routing	27
2.4. Clocking Structure	27
2.5. SGMII TX/RX	35
2.6. sysMEM Memory	36
2.7. Large RAM	38
2.8. sysDSP	38
2.9. Programmable I/O (PIO)	42
2.10. Programmable I/O Cell (PIC)	42
2.11. DDR Memory Support	47
2.12. sysI/O Buffer	51
2.13. Analog Interface	58
2.14. IEEE 1149.1-Compliant Boundary Scan Testability	58
2.15. Device Configuration	59
2.16. Single Event Upset (SEU) Support	60
2.17. On-Chip Oscillator	60
2.18. User I2C IP	60
2.19. User Flash Memory (UFM)	61
2.20. Trace ID	61
2.21. Pin Migration	61
2.22. Peripheral Component Interconnect Express (PCIe)	62
2.23. Cryptographic Engine	64
3. DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	65
3.1. Absolute Maximum Ratings	65
3.2. Recommended Operating Conditions ^{1, 2, 3}	65
3.3. Power Supply Ramp Rates	66
3.4. Power up Sequence	66
3.5. On-Chip Programmable Termination	67
3.6. Hot Socketing Specifications	68
3.7. Programming/Erase Specifications	68
3.8. ESD Performance	68
3.9. DC Electrical Characteristics	69
3.10. Supply Currents	70
3.11. sysI/O Recommended Operating Conditions	71
3.12. sysI/O Single-Ended DC Electrical Characteristics ³	72
3.13. sysI/O Differential DC Electrical Characteristics	74
3.14. Maximum sysI/O Buffer Speed	83
3.15. Typical Building Block Function Performance	85
3.16. LMMI	86
3.17. Derating Timing Tables	86
3.18. External Switching Characteristics	86

3.19.	sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$).....	96
3.20.	Internal Oscillators Characteristics	97
3.21.	Flash Download Time	97
3.22.	Flash Program and Erase Current	97
3.23.	User I2C Characteristics	97
3.24.	Analog-Digital Converter (ADC) Block Characteristics	98
3.25.	Comparator Block Characteristics.....	99
3.26.	Digital Temperature Readout Characteristics.....	99
3.27.	Hardened SGMII Receiver Characteristics	99
3.28.	sysCONFIG Port Timing Specifications	100
3.29.	JTAG Port Timing Specifications.....	105
3.30.	Switching Test Conditions.....	106
4.	DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T	
Commercial and Industrial.....		107
4.1.	Absolute Maximum Ratings	107
4.2.	Recommended Operating Conditions ^{1, 2, 3}	107
4.3.	Power Supply Ramp Rates	109
4.4.	Power up Sequence	109
4.5.	On-Chip Programmable Termination.....	110
4.6.	Hot Socketing Specifications	111
4.7.	Programming/Erase Specifications	111
4.8.	ESD Performance	111
4.9.	DC Electrical Characteristics.....	111
4.10.	Supply Currents.....	113
4.11.	sysI/O Recommended Operating Conditions.....	113
4.12.	sysI/O Single-Ended DC Electrical Characteristics ³	115
4.13.	sysI/O Differential DC Electrical Characteristics	117
4.14.	Maximum sysI/O Buffer Speed	125
4.15.	Typical Building Block Function Performance.....	127
4.16.	LMMI	128
4.17.	Derating Timing Tables	128
4.18.	External Switching Characteristics	129
4.19.	sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$).....	138
4.20.	Internal Oscillators Characteristics	139
4.21.	Flash Download Time	139
4.22.	Flash Program and Erase Current	139
4.23.	User I2C Characteristics	140
4.24.	Analog-Digital Converter (ADC) Block Characteristics	140
4.25.	Comparator Block Characteristics.....	141
4.26.	Digital Temperature Readout Characteristics.....	141
4.27.	Hardened PCIe Characteristics for LFMXO5-35/T and LFMXO5-65/T Parts	142
4.28.	Hardened PCIe Characteristics for LFMXO5-55T and LFMXO5-100T Parts	145
4.29.	Hardened SGMII Receiver Characteristics	148
4.30.	sysCONFIG Port Timing Specifications	148
4.31.	JTAG Port Timing Specifications.....	153
4.32.	Switching Test Conditions.....	154
5.	Pinout Information.....	155
5.1.	Signal Descriptions	155
5.2.	Pin Information Summary.....	160

6.	Ordering Information	167
6.1.	Part Number Description	167
6.2.	Ordering Part Numbers.....	168
	Supplemental Information.....	170
	For Further Information	170
	Revision History	171

Figures

Figure 2.1. Simplified Block Diagram, MachXO5-NX-25 Device (Top Level)	19
Figure 2.2. Simplified Block Diagram, MachXO5-NX-55T Device (Top Level)	20
Figure 2.3. Simplified Block Diagram, MachXO5-NX-100T Device (Top Level)	21
Figure 2.4. Simplified Block Diagram, MachXO5-NX-35/T and MachXO5-NX-65/T Devices (Top Level)	22
Figure 2.5. PFU Diagram.....	23
Figure 2.6. Slice Diagram.....	24
Figure 2.7. Slice Configuration for LUT4 and LUT5	25
Figure 2.8. General Purpose PLL Diagram.....	28
Figure 2.9. Clocking for MachXO5-NX-35/T, MachXO5-NX-65/T, and MachXO5-NX-25 Devices.....	29
Figure 2.10. Clocking for MachXO5-NX-55T/MachXO5-NX-100T Devices.....	29
Figure 2.11. Edge Clock Sources per Bank	31
Figure 2.12. DCS_CMUX Diagram for MachXO5-NX-25 Devices.....	32
Figure 2.13. DCS_CMUX Diagram for MachXO5-NX-55T/MachXO5-NX-100T Devices	32
Figure 2.14. DCS Waveforms	33
Figure 2.15. DLLDEL Functional Diagram	34
Figure 2.16. DDRDLL Architecture for MachXO5-NX-25 Devices.....	34
Figure 2.17. DDRDLL Architecture for MachXO5-NX-55T/MachXO5-NX-100T Devices	35
Figure 2.18. SGMII CDR IP	36
Figure 2.19. Memory Core Reset	38
Figure 2.20. Comparison of General DSP and MachXO5-NX Approaches	39
Figure 2.21. DSP Functional Block Diagram	41
Figure 2.22. Group of Two High Performance Programmable (HPIO) I/O Cells	43
Figure 2.23. Wide Range Programmable (WRIO) I/O Cells	43
Figure 2.24. Input Register Block for PIO on Top, Left, and Right Sides of the Device	44
Figure 2.25. Input Register Block for PIO on Bottom Side of the Device.....	45
Figure 2.26. Output Register Block on Top, Left, and Right Sides	45
Figure 2.27. Output Register Block on Bottom Side	46
Figure 2.28. Tri-state Register Block on Top, Left, and Right Sides	46
Figure 2.29. Tri-state Register Block on Bottom Side	47
Figure 2.30. DQS Grouping on the Bottom Edge	48
Figure 2.31. DQS Control and Delay Block (DQSBUF)	49
Figure 2.32. sysI/O Banking of MachXO5-NX-25 Devices	54
Figure 2.33. sysI/O Banking of MachXO5-NX-55T/MachXO5-NX-100T Devices.....	54
Figure 2.34. sysI/O Banking of MachXO5-NX-35T/MachXO5-NX-65T Devices.....	55
Figure 2.35. PCIe Core.....	62
Figure 2.36. PCIe Soft IP Wrapper.....	63
Figure 2.37. Cryptographic Engine Block Diagram.....	64
Figure 3.1. On-Chip Termination.....	67
Figure 3.2. LVDS25E Output Termination Example	75
Figure 3.3. SubLVDS Input Interface	76
Figure 3.4. SubLVDS Output Interface	76
Figure 3.5. SLVS Interface	78
Figure 3.6. MIPI Interface.....	79
Figure 3.7. Receiver RX.CLK.Centered Waveforms	92
Figure 3.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms.....	93
Figure 3.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms.....	93
Figure 3.10. Transmit TX.CLK.Aligned Waveforms.....	93

Figure 3.11. DDRX71 Video Timing Waveforms.....	94
Figure 3.12. Receiver DDRX71_RX Waveforms.....	94
Figure 3.13. Transmitter DDRX71_TX Waveforms.....	95
Figure 3.14. Configuration Error Notification (1).....	102
Figure 3.15. Slave SPI/I2C/I3C POR/REFRESH Timing	102
Figure 3.16. Slave SPI/I2C/I3C PROGRAMN Timing	103
Figure 3.17. Slave SPI Configuration Timing	103
Figure 3.18. I2C /I3C Configuration Timing.....	104
Figure 3.19. Slave SPI/I2C/I3C Wake-Up Timing	104
Figure 3.20. JTAG Port Timing Waveforms	105
Figure 3.21. Output Test Load, LVTTTL and LVCMOS Standards	106
Figure 4.1. On-Chip Termination.....	110
Figure 4.2. LVDS25E Output Termination Example	118
Figure 4.3. SubLVDS Input Interface	118
Figure 4.4. SubLVDS Output Interface	119
Figure 4.5. SLVS Interface	120
Figure 4.6. MIPI Interface.....	121
Figure 4.7. Receiver RX.CLK.Centered Waveforms	135
Figure 4.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms.....	135
Figure 4.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms.....	136
Figure 4.10. Transmit TX.CLK.Aligned Waveforms.....	136
Figure 4.11. DDRX71 Video Timing Waveforms.....	137
Figure 4.12. Receiver DDRX71_RX Waveforms.....	137
Figure 4.13. Transmitter DDRX71_TX Waveforms.....	138
Figure 4.14. Configuration Error Notification (2).....	150
Figure 4.15. Slave SPI/I2C/I3C POR/REFRESH Timing	150
Figure 4.16. Slave SPI/I2C/I3C PROGRAMN Timing	151
Figure 4.17. Slave SPI Configuration Timing	151
Figure 4.18. I2C/I3C Configuration Timing.....	152
Figure 4.19. Slave SPI/I2C/I3C Wake-Up Timing	152
Figure 4.20. JTAG Port Timing Waveforms	153
Figure 4.21. Output Test Load, LVTTTL and LVCMOS Standards	154
Figure 6.1. Top Marking Diagram.....	168

Tables

Table 1.1. Specification Status for MachXO5-NX Devices.....	14
Table 1.2. MachXO5-NX Commercial/Industrial Family Selection Guide	17
Table 2.1. Resources and Modes Available per Slice	23
Table 2.2. Slice Signal Descriptions.....	25
Table 2.3. Number of Slices Required to Implement Distributed RAM	26
Table 2.4. sysMEM Block Configurations.....	37
Table 2.5. Maximum Number of Elements in a sysDSP block.....	42
Table 2.6. Input Block Port Description	44
Table 2.7. Output Block Port Description	46
Table 2.8. Tri-state Block Port Description	47
Table 2.9. DQSBUF Port List Description.....	50
Table 2.10. Single-Ended I/O Standards	52
Table 2.11. Differential I/O Standards	53
Table 2.12. Single-Ended I/O Standards Supported on Various Sides	57
Table 2.13. Differential I/O Standards Supported on Various Sides.....	57
Table 2.14. UFM Size.....	61
Table 3.1. Absolute Maximum Ratings	65
Table 3.2. Recommended Operating Conditions.....	65
Table 3.3. Power Supply Ramp Rates.....	66
Table 3.4. Power-On Reset	66
Table 3.5. On-Chip Termination Options for Input Modes	67
Table 3.6. Hot Socketing Specifications for GPIO	68
Table 3.7. Programming/Erase Specifications	68
Table 3.8. DC Electrical Characteristics – Wide Range (Over Recommended Operating Conditions).....	69
Table 3.9. DC Electrical Characteristics – High Speed (Over Recommended Operating Conditions).....	69
Table 3.10. Capacitors – Wide Range (Over Recommended Operating Conditions)	69
Table 3.11. Capacitors – High Performance (Over Recommended Operating Conditions).....	70
Table 3.12. Single Ended Input Hysteresis – Wide Range (Over Recommended Operating Conditions).....	70
Table 3.13. Single Ended Input Hysteresis – High Performance (Over Recommended Operating Conditions).....	70
Table 3.14. sysI/O Recommended Operating Conditions.....	71
Table 3.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions)	72
Table 3.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions) ³	73
Table 3.17. I/O Resistance Characteristics (Over Recommended Operating Conditions).....	73
Table 3.18. VIN Maximum Overshoot/Undershoot Allowance – Wide Range ^{1,2}	74
Table 3.19. VIN Maximum Overshoot/Undershoot Allowance – High Performance ^{1,2}	74
Table 3.20. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions) ¹	74
Table 3.21. LVDS25E DC Conditions.....	75
Table 3.22. SubLVDS Input DC Electrical Characteristics (Over Recommended Operating Conditions)	76
Table 3.23. SubLVDS Output DC Electrical Characteristics (Over Recommended Operating Conditions)	76
Table 3.24. SLVS Input DC Characteristics (Over Recommended Operating Conditions)	77
Table 3.25. SLVS Output DC Characteristics (Over Recommended Operating Conditions)	77
Table 3.26. Soft D-PHY Input Timing and Levels	80
Table 3.27. Soft D-PHY Output Timing and Levels	81
Table 3.28. Soft D-PHY Clock Signal Specification.....	81
Table 3.29. Soft D-PHY Data-Clock Timing Specifications.....	82

Table 3.30. Maximum I/O Buffer Speed ^{1, 2, 3, 4, 7}	83
Table 3.31. Pin-to-Pin Performance	85
Table 3.32. Register-to-Register Performance ^{1, 3, 4}	85
Table 3.33. LMMI F _{MAX} Summary	86
Table 3.34. External Switching Characteristics (V _{CC} = 1.0 V)	86
Table 3.35. sysCLOCK PLL Timing (V _{CC} = 1.0 V)	96
Table 3.36. Internal Oscillators (V _{CC} = 1.0 V)	97
Table 3.37. Flash Download Time	97
Table 3.38. Program and Erase Supply Current	97
Table 3.39. User I2C Specifications (V _{CC} = 1.0 V)	97
Table 3.40. ADC Specifications ¹	98
Table 3.41. Comparator Specifications	99
Table 3.42. DTR Specifications ^{1, 2}	99
Table 3.43. SGMII ¹ Rx	99
Table 3.44. sysCONFIG Port Timing Specifications	100
Table 3.45. JTAG Port Timing Specifications	105
Table 3.46. Test Fixture Required Components, Non-Terminated Interfaces	106
Table 4.1. Absolute Maximum Ratings	107
Table 4.2. Recommended Operating Conditions	107
Table 4.3. Power Supply Ramp Rates	109
Table 4.4. Power-On Reset	109
Table 4.5. On-Chip Termination Options for Input Modes	110
Table 4.6. Hot Socketing Specifications for GPIO	111
Table 4.7. Programming/Erase Specifications	111
Table 4.8. DC Electrical Characteristics – Wide Range (Over Recommended Operating Conditions)	111
Table 4.9. DC Electrical Characteristics – High Speed (Over Recommended Operating Conditions)	112
Table 4.10. Capacitors – Wide Range (Over Recommended Operating Conditions)	112
Table 4.11. Capacitors – High Performance (Over Recommended Operating Conditions)	112
Table 4.12. Single Ended Input Hysteresis – Wide Range (Over Recommended Operating Conditions)	112
Table 4.13. Single Ended Input Hysteresis – High Performance (Over Recommended Operating Conditions)	113
Table 4.14. sysI/O Recommended Operating Conditions	113
Table 4.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions)	115
Table 4.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions) ³	115
Table 4.17. I/O Resistance Characteristics (Over Recommended Operating Conditions)	116
Table 4.18. VIN Maximum Overshoot/Undershoot Allowance – Wide Range ^{1, 2}	116
Table 4.19. VIN Maximum Overshoot/Undershoot Allowance – High Performance ^{1, 2}	116
Table 4.20. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions) ¹	117
Table 4.21. LVDS25E DC Conditions	117
Table 4.22. SubLVDS Input DC Electrical Characteristics (Over Recommended Operating Conditions)	118
Table 4.23. SubLVDS Output DC Electrical Characteristics (Over Recommended Operating Conditions)	119
Table 4.24. SLVS Input DC Characteristics (Over Recommended Operating Conditions)	119
Table 4.25. SLVS Output DC Characteristics (Over Recommended Operating Conditions)	120
Table 4.26. Soft D-PHY Input Timing and Levels	122
Table 4.27. Soft D-PHY Output Timing and Levels	123
Table 4.28. Soft D-PHY Clock Signal Specification	123
Table 4.29. Soft D-PHY Data-Clock Timing Specifications	124

Table 4.30. Maximum I/O Buffer Speed ^{1, 2, 3, 4, 7}	125
Table 4.31. Pin-to-Pin Performance	127
Table 4.32. Register-to-Register Performance ^{1, 3, 4}	127
Table 4.33. LMMI F _{MAX} Summary	128
Table 4.34. External Switching Characteristics (V _{CC} = 1.0 V)	129
Table 4.35. sysCLOCK PLL Timing (V _{CC} = 1.0 V)	138
Table 4.36. Internal Oscillators (V _{CC} = 1.0 V)	139
Table 4.37. Flash Download Time	139
Table 4.38. Program and Erase Supply Current	139
Table 4.39. User I2C Specifications (V _{CC} = 1.0 V)	140
Table 4.40. ADC Specifications ¹	140
Table 4.41. Comparator Specifications	141
Table 4.42. DTR Specifications ^{1, 2}	141
Table 4.43. PCIe (2.5 Gbps)	145
Table 4.44. PCIe (5 Gbps)	146
Table 4.45. SGMII ¹ Rx	148
Table 4.46. sysCONFIG Port Timing Specifications	148
Table 4.47. JTAG Port Timing Specifications	153
Table 4.48. Test Fixture Required Components, Non-Terminated Interfaces	154
Table 5.1. Signal Descriptions	155
Table 5.2. Pin Information Summary of LFMXO5-25, LFMXO5-55T, and LFMXO5-100T	160
Table 5.3. Pin Information Summary of LFMXO5-35, LFMXO5-35T, LFMXO5-65, and LFMXO5-65T	163

Acronyms in This Document

A list of acronyms used in this document.

Acronym	Definition
ADC	Analog to Digital Converter
AHB-Lite	Advanced High-performance Bus-Lite
AI	Artificial Intelligence
APB	Advanced Peripheral Bus
BGA	Ball Grid Array
CDR	Clock and Data Recovery
CRC	Cycle Redundancy Code
CRE	Cryptographic Engine
CSI-2	Camera Serial Interface-2
DCC	Dynamic Clock Control
DCS	Dynamic Clock Select
DDR	Double Data Rate
DLL	Delay Locked Loops
D-PHY	Display Serial Interface-Physical Layer
DRAM	Dynamic Random Access Memory
DSI	Digital Serial Interface
DSP	Digital Signal Processing
DTR	Digital Temperature Readout
EBR	Embedded Block RAM
ECC	Error Correction Coding
ECLK	Edge Clock
EMIF	External Memory Interface
ESFB	Embedded Security Function Block
FD-SOI	Fully Depleted Silicon on Insulator
FFT	Fast Fourier Transforms
FIFO	First In First Out
FIR	Finite Impulse Response
HP	High Performance
HSP	High Speed Port
JTAG	Joint Test Action Group
LC	Logic Cell
LMMI	Lattice Memory Mapped Interface
LOL	Loss of Lock
LRAM	Large RAM
LVC MOS	Low-Voltage Complementary Metal Oxide Semiconductor
LVDS	Low-Voltage Differential Signaling
LVPECL	Low Voltage Positive Emitter Coupled Logic
LVTTL	Low Voltage Transistor-Transistor Logic
LUT	Look Up Table
MIPI	Mobile Industry Processor Interface
ML	Machine Learning
MSPS	Million Samples per Second
PCI	Peripheral Component Interconnect
PCS	Physical Coding Sublayer
PCLK	Primary Clock

Acronym	Definition
PDPR	Pseudo Dual Port RAM
PFU	Programmable Functional Unit
PIC	Programmable I/O Cells
PLL	Phase Locked Loops
POR	Power On Reset
RAM	Random Access Memory
RGMII	Reduced Gigabit Media Independent Interface
ROM	Read Only Memory
SAR	Successive Approximation Resistor
SEC	Soft Error Correction
SED	Soft Error Detection
SER	Soft Error Rate
SERDES	Serializer/Deserializer
SEU	Single Event Upset
SGMII	Serial Gigabit Media Independent Interface
SLVS	Scalable Low-Voltage Signaling
SPI	Serial Peripheral Interface
SPR	Single Port RAM
SRAM	Static Random Access Memory
subLVDS	(Reduced Voltage) Low Voltage Differential Signaling
TAP	Test Access Port
TDM	Time Division Multiplexing
UFM	User Flash Memory
VREF	Voltage Reference

1. General Description

The MachXO5™-NX family of low-power FPGAs can be used in a wide range of applications, and are optimized for bridging, I/O expansion, and board control and management. It is built on Lattice Semiconductor Nexus FPGA platform, using low-power 28 nm FD-SOI technology. It combines the extreme flexibility of an FPGA with the low power and high reliability (due to the extreme low Soft Error Rate) of FD-SOI technology, and offers small footprint package options.

The MachXO5-NX family supports a variety of interfaces including MIPI D-PHY (CSI-2, DSI), LVDS, SLVS, subLVDS, SGMII¹ (Gigabit Ethernet), PCI Express® (Gen1, and Gen2) and more. It includes embedded flash memory for on-chip multi-boot and UFM.

Processing features of MachXO5-NX device include up to 96k logic cells, 156 18 × 18 multipliers, 7.3 Mb of embedded memory (consisting of EBR and LRAM blocks), distributed memory, DRAM interfaces (supporting DDR3, DDR3L, and LPDDR4 up to 1066 Mbps).

The MachXO5-NX FPGA supports the fast configuration of its reconfigurable SRAM-based logic fabric, and ultra-fast configuration of its programmable sysI/O™ from on-chip Flash. To secure user designs, the MachXO5-NX security features include bitstream encryption, authentication, and password protection. In addition to the high reliability inherent to FD-SOI technology (due to its extreme low SER), active reliability features such as built-in frame-based SED/SEC (for SRAM-based logic fabric), and ECC (for EBR and LRAM) are also supported. Built-in ADC is available in each device for system monitoring functions.

Lattice Radiant™ design software allows large complex user designs to be efficiently implemented on the MachXO5-NX FPGA family. Synthesis library support for MachXO5-NX devices is available for popular logic synthesis tools. Radiant tools use the synthesis tool output along with constraints from its floor planning tools, to place and route the user design in MachXO5-NX device. The tools extract timing from the routing, and back-annotate it into the design for timing verification.

Lattice Semiconductor provides many pre-engineered Intellectual Property (IP) modules for the MachXO5-NX family. By using these configurable soft IP cores as standardized blocks, you are free to concentrate on the unique aspects of your design, increasing your productivity.

Table 1.1. Specification Status for MachXO5-NX Devices

Table 2: Specification Status for MachXO5-NX Devices				
Device/Part		Package	Grade	Status
MachXO5-NX	LFMXO5-25	• 7BBG256 • 8BBG256 • 9BBG256 • 7BBG400 • 8BBG400 • 9BBG400	Commercial/Industrial	Production
	LFMXO5-55T	• 7BBG400 • 8BBG400 • 9BBG400	Commercial/Industrial	Production
	LFMXO5-100T	• 7BBG400C • 8BBG400C • 9BBG400C	Commercial/Industrial	Production
	LFMXO5-35/T	• 7BBG400 • 8BBG400 • 9BBG400 • 7BBG484 • 8BBG484 • 9BBG484 • 8BBG256 • 8BBG256	Commercial/Industrial	Advance
	LFMXO5-65/T	• 7BBG400 • 8BBG400 • 9BBG400 • 7BBG484 • 8BBG484 • 9BBG484 • 8BBG256 • 9BBG256	Commercial/Industrial	Advance

Note: For the LFMXO5-35/T and LFMXO5-65/T pars, transceivers are available only in the BBG256 and BBG484 package options.

1.1. Features

- Programmable Architecture
 - 27k to 96k logic cells
 - 20 to 156 18×18 multipliers (in sysDSP™ blocks)
 - 1.9 Mb to 7.3 Mb of embedded memory blocks (EBR, LRAM)
 - 200 to 300 programmable sysI/O (High Performance and Wide Range I/O)
- Programmable sysI/O supports wide varieties of interfaces
 - High Performance (HP) on bottom I/O dual rank
 - Supports up to 1.8 V V_{CCIO}
 - Mixed voltage support (1.0 V, 1.2 V, 1.5 V, 1.8 V)
 - High-speed differential up to 1.2 Gbps
 - Supports soft D-PHY (Tx/Rx), LVDS 7:1 (Tx/Rx), SLVS (Tx/Rx), subLVDS (Rx)
 - Supports SGMII¹ (Gb Ethernet) – two channels (Tx/Rx) at 1.25 Gbps
 - Dedicated DDR3/DDR3L/LPDDR4 memory support with DQS logic, up to 1066 Mbps data-rate and $\times 16$ data-width
 - Wide Range (WR) on Left, Right and Top I/O Banks
 - Supports up to 3.3 V V_{CCIO}
 - Mixed voltage support (1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V)
 - Programmable slew rate (slow, medium, fast)
 - Controlled impedance mode
 - Emulated LVDS support
 - Hot socketing support
- SERDES PCIe Hard IP (MachXO5-NX T-suffix devices only)
 - PCIe hard IP supports:
 - Gen1, and Gen2
 - Endpoint
 - Multi-function up to four functions
 - One single lane or two single lanes
- Power Modes – Low-Power versus High-Performance modes
 - User selectable
 - Low-Power mode for power and/or thermal challenges
 - High-Performance mode for faster processing
- Small footprint package options
 - 14×14 mm to 17×17 mm package options
- Two channels of Clock Data Recovery (CDR) up to 1.25 Gbps to support SGMII¹ using HP I/O
 - CDR for RX
 - 8b/10b decoding
 - Independent Loss of Lock (LOL) detector for each CDR block
- sysCLOCK™ analog PLLs
 - Two for 27k LC device
 - Six outputs per PLL
 - Fractional N
 - Programmable and dynamic phase control
- sysDSP enhanced DSP blocks
 - Hardened pre-adder
 - Dynamic Shift for AI/ML support
 - Four 18×18 , eight 9×9 , two 18×36 , or 36×36 multipliers
 - Advanced 18×36 , two 18×18 , or four 8×8 MAC
- Flexible memory resources
 - 1.4 Mb sysMEM™ Embedded Block RAM (EBR)
 - Programmable width
 - Error Correction Coding (ECC)²
 - First Input First Output (FIFO)
 - 184 to 639 kbit distributed RAM
 - Large RAM Blocks
 - 0.5 Mb per block

- Internal bus interface support
 - APB control bus
 - AHB-Lite for data bus
 - AXI4-streaming
- Non-Volatile Configuration – Fast, Secure, On-chip multi-boot
 - Embedded flash memory
 - Single-chip, secure solution
 - JTAG, SPI, I2C and I3C
 - Ultrafast I/O configuration for instant-on support
 - Multi-sectored UFM for customer data storage
 - Bitstream Security
 - Encryption
 - Authentication
- Cryptographic Engine
 - Bitstream encryption – using AES-256
 - Bitstream authentication – using ECDSA
 - Hashing algorithms – SHA, HMAC
 - True Random Number Generator
 - AES 128/256 Encryption
- Single Event Upset (SEU) Mitigation Support
 - Extremely low Soft Error Rate (SER) due to FD-SOI technology
 - Soft Error Detection – Embedded hard macro
 - Soft Error Correction – Continuous user operation mode
 - Soft Error Injection – Emulate SEU event to debug system error handling
- ADC block with two SAR ADCs that sample simultaneously²
 - Dedicated differential pair input for each SAR ADC
 - Up to eight additional differential pair input for each SAR ADC
 - 12-bit resolution
 - Sampling frequency of 623 ksp/s for each channel
 - Up to three continuous time comparators
- System Level Support
 - IEEE 1149.1 and IEEE 1532 compliant
 - Reveal Logic Analyzer
 - On-chip oscillator for initialization and general use
 - 1.0 V core power supply

Notes:

1. The SGMII interface using LVDS I/O has limitations when operating across the full specified temperature range. Lattice recommends using alternative interfaces, such as SERDES or RGMII, for designs requiring Gigabit Ethernet. Refer to the [Knowledge Database article](#) for details. Contact your local Lattice sales representative for more information.
2. Available in select speed grades, see [Ordering Information](#).

Table 1.2. MachXO5-NX Commercial/Industrial Family Selection Guide

Device/Part	LFMXO5-25	LFMXO5-55T	LFMXO5-100T	LFMXO5-35/T	LFMXO5-65/T
Logic Cells ¹	27k	53k	96k	35K	65K
Embedded Memory (EBR) Blocks (18 kb)	80	166	208	105	128
Embedded Memory (EBR) Bits (kb)	1,440	2,988	3,744	1890	2304
Distributed RAM Bits (kb)	184	320	639	260	300
Large Memory (LRAM) Blocks	1	5	7	1	2
Large Memory (LRAM) Bits (kb)	512	2,560	3,584	512	1024
18 × 18 Multipliers	20	146	156	48	128
ADC Blocks with two SAR ADCs ²	2	2	2	1	1
450 MHz High Frequency Oscillator	1	1	1	1	1
128 kHz Low Power Oscillator	1	1	1	1	1
GPLL	2	4	4	2	2
PCIe Gen2 hard IP	0	1	1	1	1
SERDES (Quad/Channels)	0	½	½	1/2	1/2
Bitstream Authentication	ECDSA-256	ECDSA-256	ECDSA-256	ECDSA-256	ECDSA-256
UFM (kb)	15,360	79,872	79,872	21,504	21,504
EMIF	DDR3/DDR3L	DDR3/DDR3L/ LPDDR4	DDR3/DDR3L/ LPDDR4	DDR3/DDR3L	DDR3/DDR3L
Packages (Size, Ball Pitch)	SERDES Channels/Ios (Wide Range (WR) GPIOs (Top/Left/Right Banks) + High Performance (HP) GPIOs (Bottom Banks) + ADC dedicated inputs)				
BBG256 (14 × 14 mm, 0.8 mm)	0/205 (159+40+6)	—	—	189 (159, 30), 6,	189 (159, 30), 6
BBG400 (17 × 17 mm, 0.8 mm)	0/305 (251+48+6)	2/297(159+132+6)	2/297 (159+132+6)	330 (282, 48), 6	330 (282, 48), 6
BBG484 (19x19mm, 0.8mm)	—	—	—	360 (330, 30), 6	360 (330, 30), 6

Notes:

- Logic Cells = LUTs × 1.2 effectiveness.
- In select speed grades. See [Ordering Information](#).

2. Architecture

2.1. Overview

Each MachXO5-NX device contains an array of logic blocks surrounded by Programmable I/O Cells (PIC). Interspersed between the rows of logic blocks are rows of sysMEM Embedded Block RAM (EBR) and rows of sysDSP Digital Signal Processing blocks, as shown in [Figure 2.1](#). For example, The MachXO5-NX-25 device has one row of DSP blocks and contains four rows of sysMEM EBR blocks. In addition, MachXO5-NX-25 device includes one Large SRAM block. The sysMEM EBR blocks are large, dedicated 18 kbit fast memory blocks and have built-in ECC and FIFO support. Each sysMEM block can be configured to a single, pseudo dual or true dual port memory in a variety of depths and widths as RAM or ROM. Each DSP block supports variety of multiplier, adder configurations with one 108-bit or two 54-bit accumulators supported, which are the building blocks for complex signal processing capabilities. Refer to [Figure 2.1](#), [Figure 2.2](#), [Figure 2.3](#), and [Figure 2.4](#) for details of MachXO5-NX devices.

Each PIC block encompasses two PIO (PIO pairs) with their respective sysI/O buffers. The sysI/O buffers of the MachXO5-NX devices are arranged in up to twelve banks allowing the implementation of a wide variety of I/O standards. The Wide Range (WR) I/O banks that are located in the top, left and right sides of the device provide flexible ranges of general purpose I/O configurations up to 3.3 V V_{CCIO5} . The banks located in the bottom side of the device are dedicated to High Performance (HP) interfaces such as LVDS, MIPI, DDR3, LPDDR4 support up to 1.8 V V_{CCIO5} .

The Programmable Functional Unit (PFU) contains the building blocks for logic, arithmetic, RAM and ROM functions. The PFU block is optimized for flexibility, allowing complex designs to be implemented quickly and efficiently. Logic Blocks are arranged in a two-dimensional array. The registers in PFU and sysI/O blocks in MachXO5-NX devices can be configured to be SET or RESET. After power up and the device is configured, it enters into user mode with these registers SET/RESET according to the configuration setting, allowing the device to enter to a known state for predictable system function.

MachXO5-NX-35/T, MachXO5-NX-65/T, MachXO5-NX-55T, and MachXO5-NX-100T FPGAs feature one hard PCIe link layer IP block which supports PCIe Gen1, Gen2 with 1 or 2 x1 configuration and internal V_{REF} that supports LPDDR4.

In addition, MachXO5-NX devices provide various system level hard IP functional and interface blocks such as I2C, SGMII/CDR, and ADC blocks. MachXO5-NX devices also provide security features to help secure user designs and deliver more robust reliability features to the user designs by using enhanced frame-based SED/SEC functions.

Other blocks provided include PLLs, DLLs, and configuration functions. The PLL and DLL blocks are located at the corners of each device. MachXO5-NX devices also include Lattice Memory Mapped Interface (LMMI) which is a Lattice standardized interface for simple read and write operations to support controlling internal IPs.

MachXO5-NX devices also provide multiple blocks of User Flash Memory (UFM). The UFM interfaces to the core logic and completes the routing through the LMMI interface. The UFM space also provides the User Key storage for customer security functions. The UFM can also be accessed through the SPI and JTAG ports.

Every device in the family has a JTAG port. This family also provides an on-chip oscillator and soft error detect (SED) capability. The MachXO5-NX devices use 1.0 V as their core voltage.

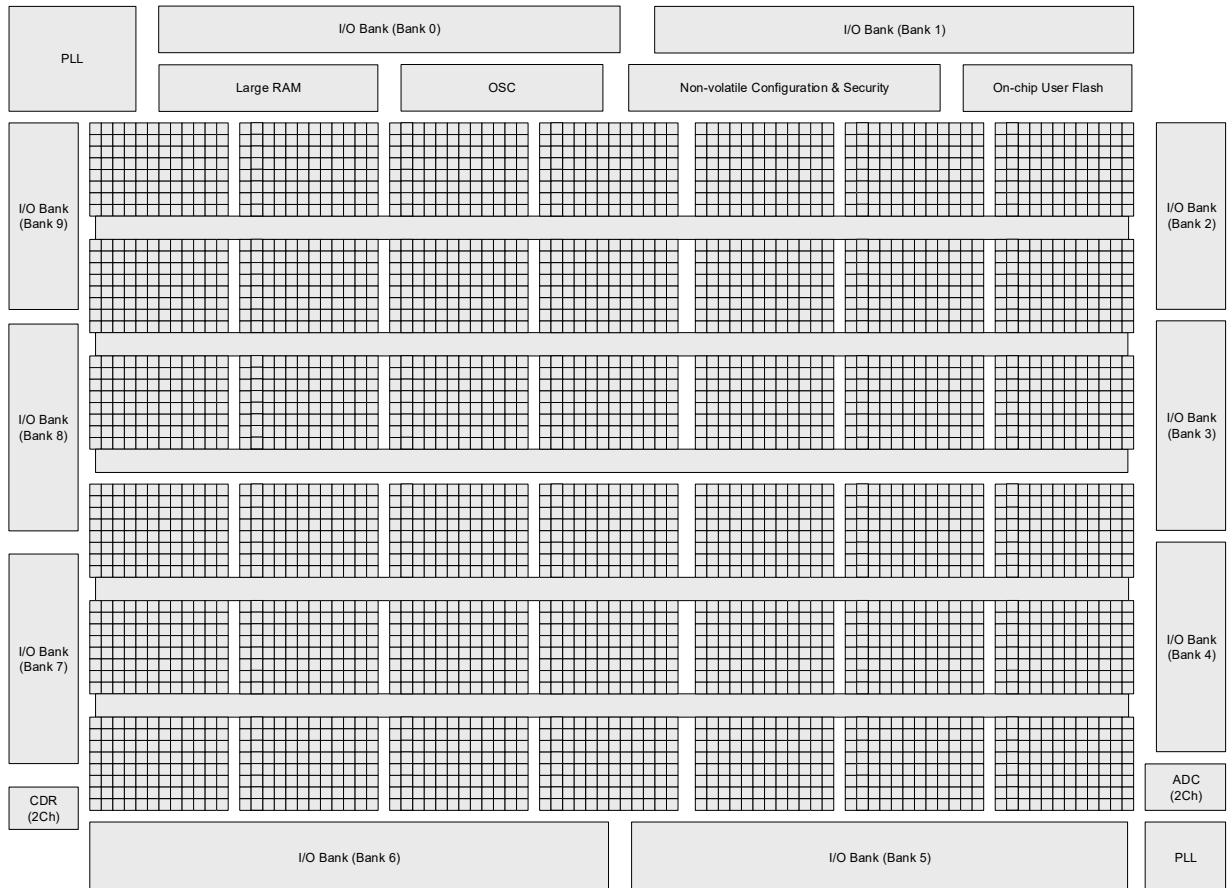


Figure 2.1. Simplified Block Diagram, MachXO5-NX-25 Device (Top Level)



Figure 2.2. Simplified Block Diagram, MachXO5-NX-55T Device (Top Level)



Figure 2.3. Simplified Block Diagram, MachXO5-NX-100T Device (Top Level)

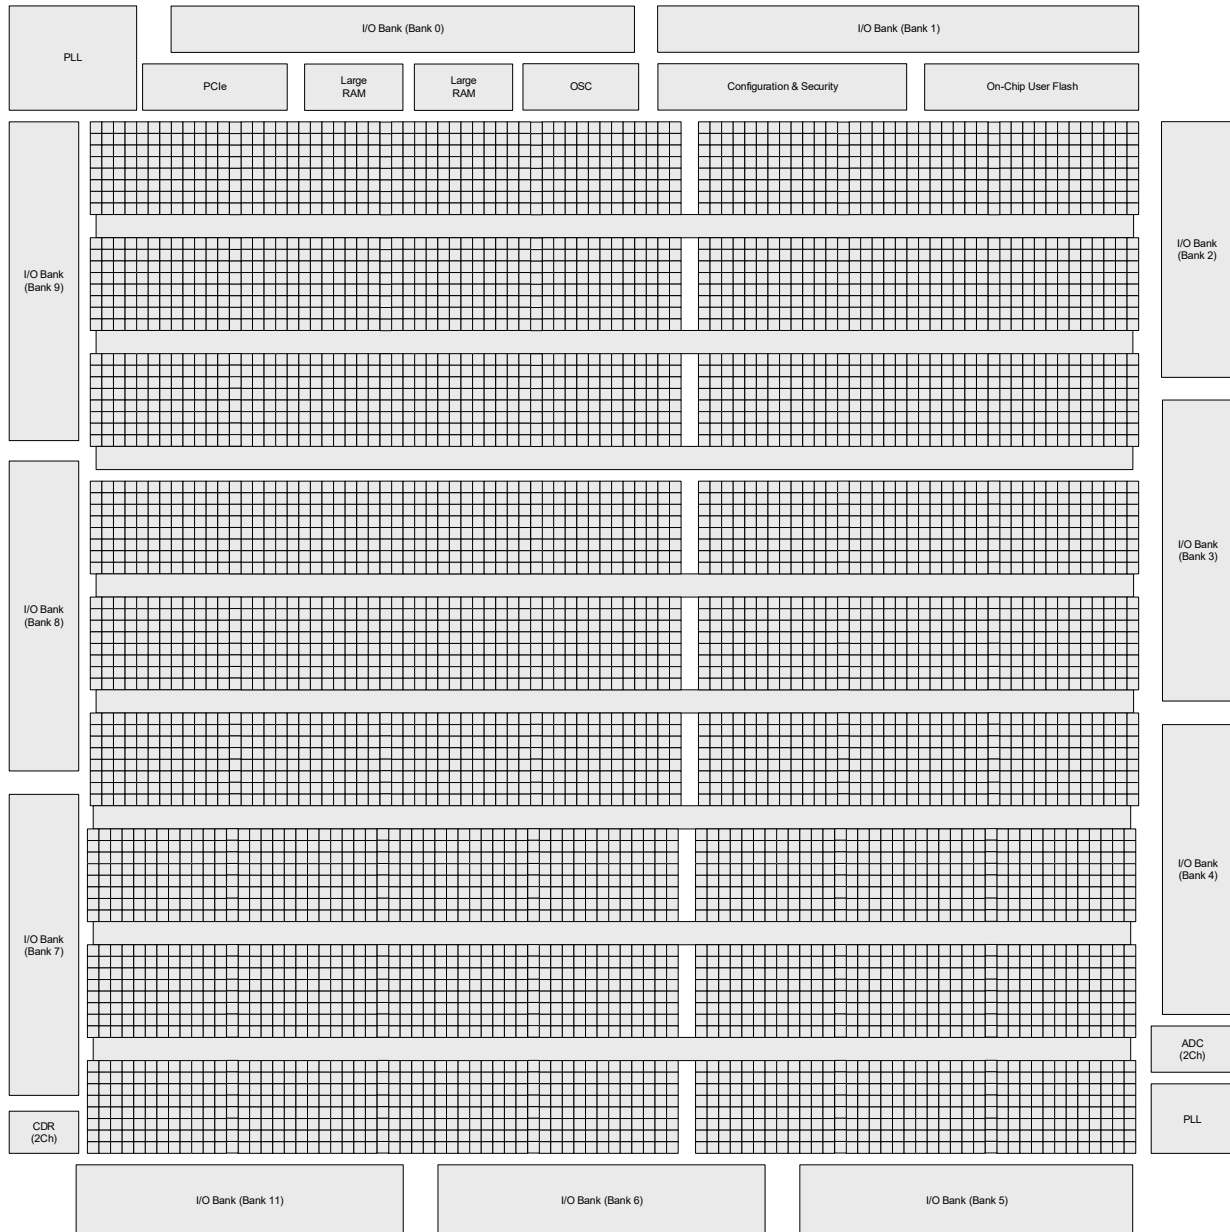


Figure 2.4. Simplified Block Diagram, MachXO5-NX-35/T and MachXO5-NX-65/T Devices (Top Level)

2.2. PFU Blocks

The core of the MachXO5-NX device consists of PFU blocks. Each PFU block consists of four interconnected slices numbered 0-3, as shown in [Figure 2.5](#). Each slice contains two LUTs. All the interconnections to and from PFU blocks are from routing.

The PFU block can be used in Distributed RAM or ROM function, or used to perform Logic, Arithmetic, or ROM functions. [Table 2.1](#) shows the functions each slice can perform in either mode.

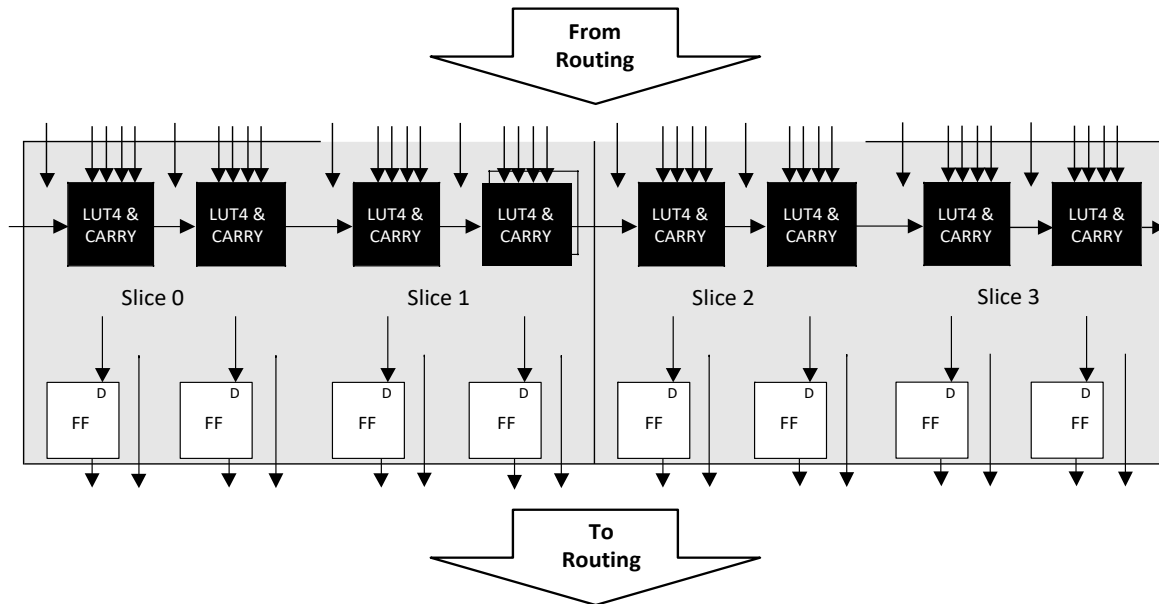


Figure 2.5. PFU Diagram

2.2.1. Slice


Each slice contains two LUT4s feeding two registers. In Distributed SRAM mode, Slice 0 and Slice 1 are configured as distributed memory, Slice 2 is not available as it is used to support Slice 0 and Slice 1, while Slice 3 is available as Logic or ROM. Table 2.1 shows the capability of the slices along with the operation modes they enable. In addition, each Slice contains logic that allows the LUTs to be combined to perform a LUT5 function. There is control logic to perform set/reset functions (programmable as synchronous/asynchronous), clock select, chip-select, and wider RAM/ROM functions.

Table 2.1. Resources and Modes Available per Slice

Slice	PFU (Used in Distributed SRAM)		PFU (Not used as Distributed SRAM)	
	Resources	Modes	Resources	Modes
Slice 0	2 LUT4s and 2 Registers	RAM	2 LUT4s and 2 Registers	Logic, Ripple, ROM
Slice 1	2 LUT4s and 2 Registers	RAM	2 LUT4s and 2 Registers	Logic, Ripple, ROM
Slice 2	2 LUT4s and 2 Registers	RAM	2 LUT4s and 2 Registers	Logic, Ripple, ROM
Slice 3	2 LUT4s and 2 Registers	Logic, Ripple, ROM	2 LUT4s and 2 Registers	Logic, Ripple, ROM

Figure 2.6 shows an overview of the internal logic of the slice. The registers in the slice can be configured for positive/negative edge trigger.


Each slice has 17 input signals: 16 signals from routing and one from the carry-chain (from the adjacent slice or PFU). Three of them are used for FF control and shared between two slices (0/1 or 2/3). There are five outputs: four to routing and one to carry-chain (to the adjacent PFU). Table 2.2 and Figure 2.6 list the signals associated with all the slices. Figure 2.7 shows the slice signals that support one LUT5 or two LUT5 functions. F0 can be configured to have one LUT4 or LUT5 output while F1 is for a LUT4 output.

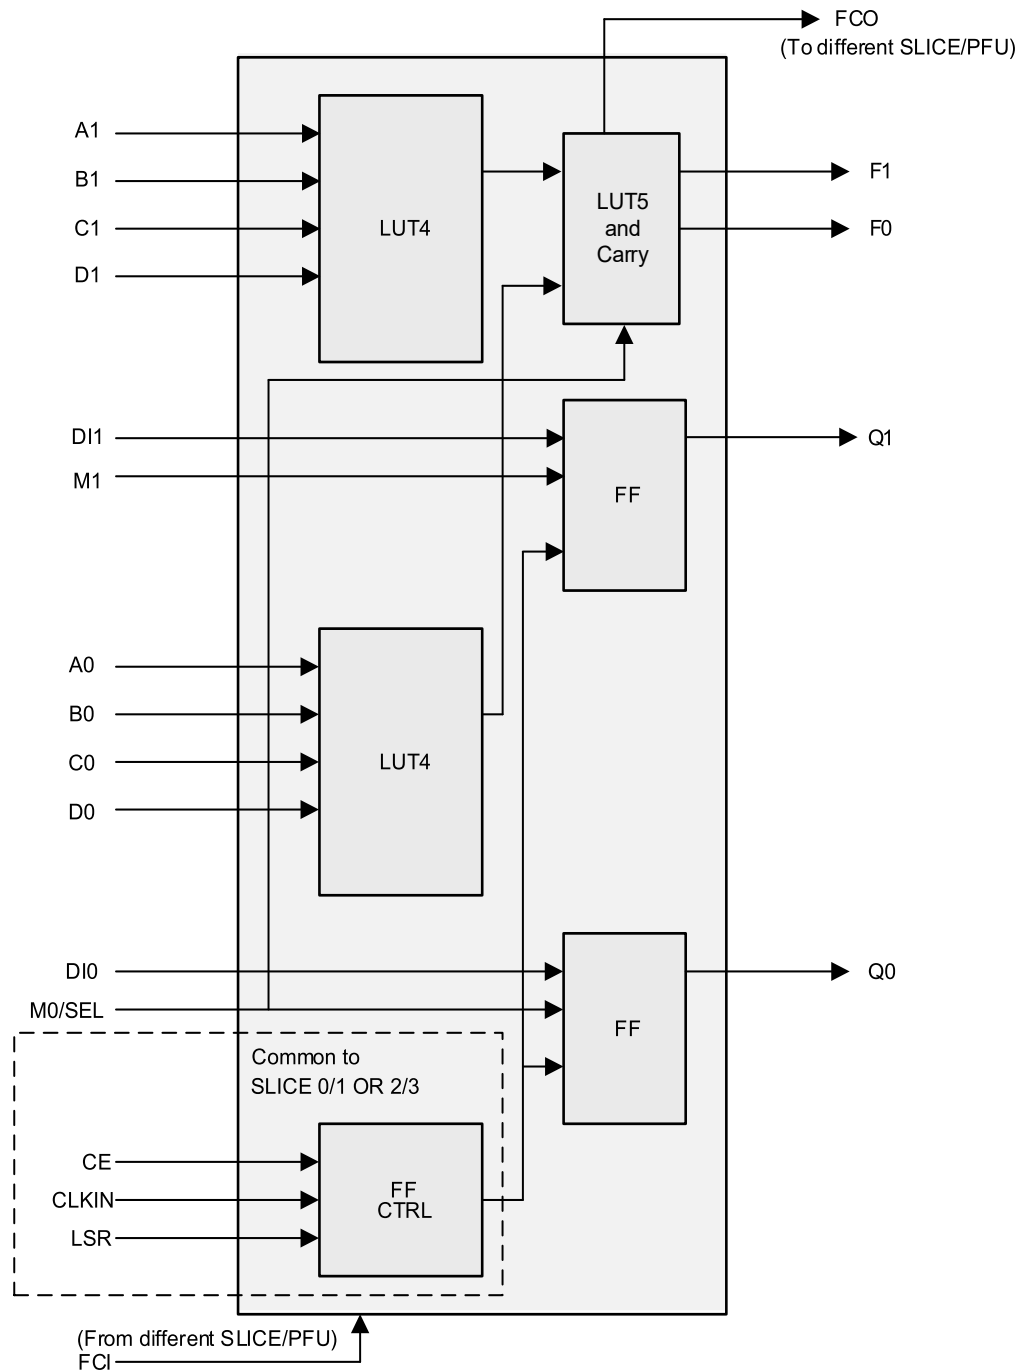

Note: In RAM mode, LUT4s use the following signals:

QWD0/1
QWDN0/1
QWAS00~03, QWAS10~13

Figure 2.6. Slice Diagram

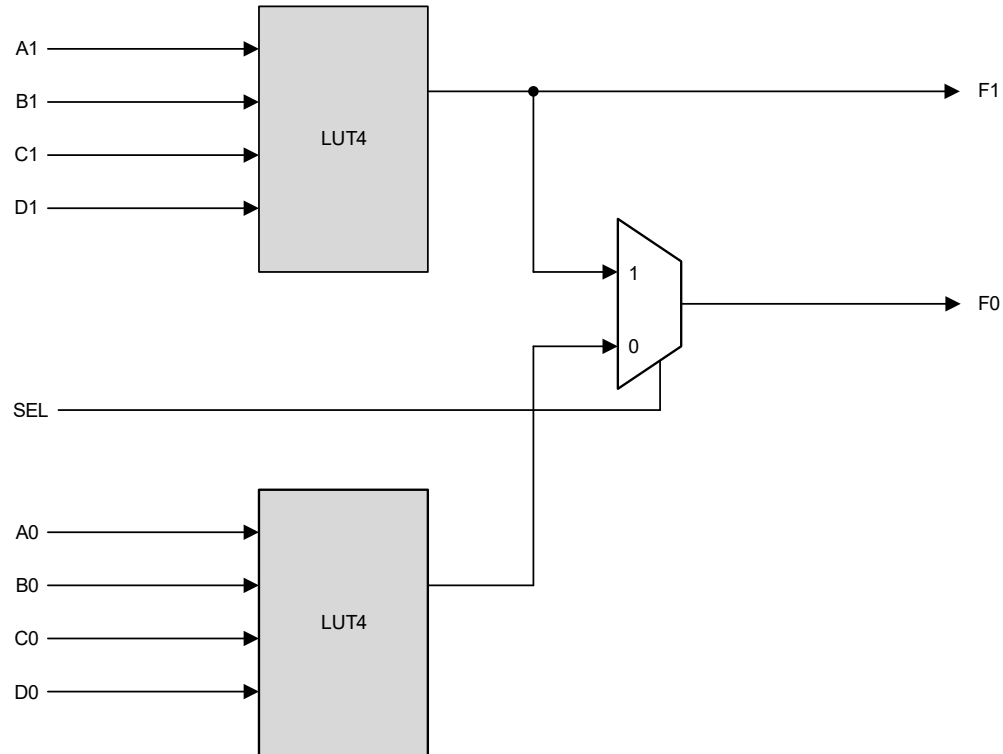

Note: In RAM mode, LUT4s use the following signals:
QWD0/1
QWDN0/1
QWAS00~03, QWAS10~13

Figure 2.7. Slice Configuration for LUT4 and LUT5

Table 2.2. Slice Signal Descriptions

Function	Type	Signal Names	Description
Input	Data signal	A0, B0, C0, D0	Inputs to LUT4
Input	Data signal	A1, B1, C1, D1	Inputs to LUT4
Input	Data signal	M0, M1	Direct input to FF from fabric
Input	Control signal	SEL	LUT5 mux control input
Input	Data signal	DI0, DI1	Inputs to FF from LUT4 F0/F1 outputs
Input	Control signal	CE	Clock Enable
Input	Control signal	LSR	Local Set/Reset
Input	Control signal	CLKIN	System Clock
Input	Inter-PFU signal	FCI	Fast Carry-in ¹
Output	Data signals	F0	LUT4/LUT5 output signal
Output	Data signals	F1	LUT4 output signal
Output	Data signals	Q0, Q1	Register outputs
Output	Inter-PFU signal	FCO	Fast carry chain output ¹

Note:

1. See Figure 2.6 for connection details.

2.2.2. Modes of Operation

Slices 0-2 have up to four potential modes of operation: Logic, Ripple, RAM and ROM. Slice 3 can be used in Logic, Ripple, or ROM modes, but not needed for RAM mode.

Logic Mode

In this mode, the LUTs in each slice are configured as 4-input combinatorial lookup tables. A LUT4 can have 16 possible input combinations. Any four input logic functions can be generated by programming this lookup table. Since there are two LUT4s per slice, a LUT5 can be constructed within one slice.

Ripple Mode

Ripple mode supports the efficient implementation of small arithmetic functions. In ripple mode, the following functions can be implemented by each slice:

- Addition 2-bit
- Subtraction 2-bit
- Add/Subtract 2-bit using dynamic control
- Up counter 2-bit
- Down counter 2-bit
- Up/Down counter with asynchronous clear 2-bit using dynamic control
- Up/Down counter with preload (sync) 2-bit using dynamic control
- Comparator functions of A and B inputs 2-bit
 - A greater-than-or-equal-to B
 - A not-equal-to B
 - A less-than-or-equal-to B
- Up/Down counter with A greater-than-or-equal-to B comparator 2-bit using dynamic control
- Up/Down counter with A less-than-or-equal-to B comparator 2-bit using dynamic control
- Multiplier support $A_i \cdot B_{j+1} + A_{i+1} \cdot B_j$ in one logic cell with 2 logic cells per slice
- Serial divider 2-bit mantissa, shift 1bit/cycle
- Serial multiplier 2-bit, shift 1bit/cycle or 2bit/cycle

Ripple Mode includes an optional configuration that performs arithmetic using fast carry chain methods. In this configuration (also referred to as CCU2 mode), two additional signals, Carry Generate and Carry Propagate, are generated on a per slice basis to allow fast arithmetic functions to be constructed by concatenating Slices.

RAM Mode

In this mode, a 16×4 -bit distributed single or pseudo dual port RAM can be constructed in one PFU using each LUT block in Slice 0 and Slice 1 as a 16×2 -bit memory in each slice. Slice 2 is used to provide memory address and control signals. MachXO5-NX devices support distributed memory initialization.

The Lattice design tools support the creation of a variety of different size memories. Where appropriate, the software constructs these using distributed memory primitives that represent the capabilities of the PFU.

Table 2.3 lists the number of slices required to implement different distributed RAM primitives. For more information about using RAM in MachXO5-NX devices, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

Table 2.3. Number of Slices Required to Implement Distributed RAM

	SPR 16×4	PDPR 16×4
Number of slices	3	3

Note: SPR = Single Port RAM, PDPR = Pseudo Dual Port RAM

ROM Mode

ROM mode uses the LUT logic; hence, Slice 0 through Slice 3 can be used in ROM mode. Preloading is accomplished through the programming interface during PFU configuration.

For more information, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

2.3. Routing

There are many resources provided in the MachXO5-NX devices to route signals individually or as busses with related control signals. The routing resources consist of switching circuitry, buffers and metal interconnect (routing) segments.

The MachXO5-NX family has an enhanced routing architecture that produces a compact design. The Lattice Radiant software tool suites take the output of the synthesis tool and places and routes the design.

2.4. Clocking Structure

The MachXO5-NX clocking structure consists of:

- clock synthesis blocks, sysCLOCK PLL;
- balanced clock tree networks, PCLK and ECLK; and
- efficient clock logic modules, Clock Dividers (PCLKDIV and ECLKDIV) and Dynamic Clock Select (DCS), Dynamic Clock Control (DCC), and DLL.

Each of these functions is described as follow.

2.4.1. Global PLL

The Global PLLs (GPLL) provide the ability to synthesize clock frequencies. The devices in the MachXO5-NX family support two full-featured General Purpose GPLLs. The Global PLLs provide the ability to synthesize clock frequencies.

The architecture of the GPLL is shown in [Figure 2.8](#). A description of the GPLL functionality follows.

REFCLK is the reference frequency input to the PLL and its source can come from external CLK inputs or from internal routing. The CLKI input feeds into the input Clock Divider block.

CLKFB is the feedback signal to the GPLL which can come from internal feedback path or routing. The feedback divider is used to multiply the reference frequency and thus synthesize a higher or lower frequency clock output.

The PLL has six clock outputs CLKOP, CLKOS, CLKOS2, CLKOS3, CLKOS4, and CLKOS5. Each output has its own output divider, thus allowing the GPLL to generate different frequencies for each output. The output dividers can have a value from 1 to 128. Each GPLL output can be used to drive the primary clock or edge clock networks.

The setup and hold times of the device can be improved by programming a phase shift into the output clocks which advances or delays the output clock with reference to the un-shifted output clock. This phase shift can either be programmed during configuration or be adjusted dynamically using the DIRSEL, DIR, DYNROTATE, and LOADREG ports.

The LOCK signal is asserted when the GPLL determines it has achieved lock and deasserted if a loss of lock is detected.

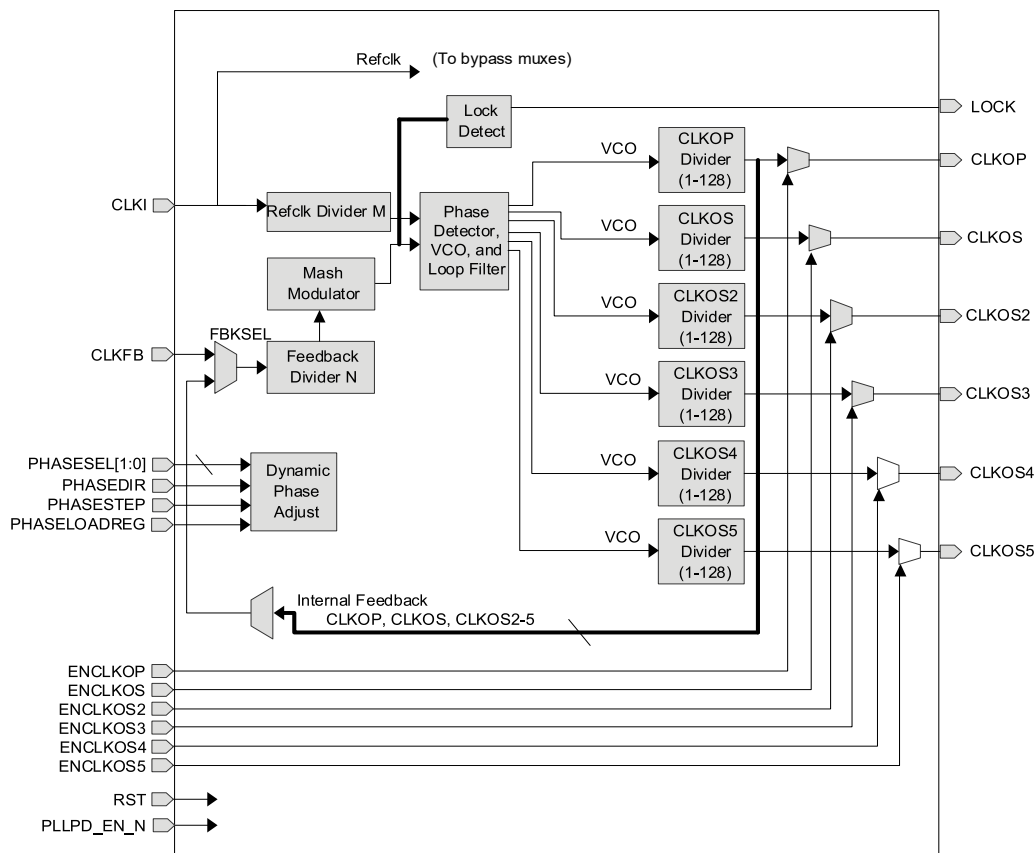


Figure 2.8. General Purpose PLL Diagram

For more details on the PLL, you can refer to the [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

2.4.2. Clock Distribution Network

There are two main clock distribution networks for any member of the MachXO5-NX product family, namely Primary Clock (PCLK) and Edge Clock (ECLK). These clock networks can be driven from many different sources, such as Clock Pins, PLL outputs, DLLDEL outputs, Clock divider outputs, and user logic. There are clock divider blocks (ECLKDIV and PCLKDIV) to provide a slower clock from these clock sources.

MachXO5-NX supports glitchless Dynamic Clock Control (DCC) for the PCLK Clock to save dynamic power. There are also Dynamic Clock Selection logic to allow glitchless selection between two clocks for the PCLK network (DCS).

Overview of Clocking Network is shown in [Figure 2.9](#) and in [Figure 2.10](#) for MachXO5-NX devices.

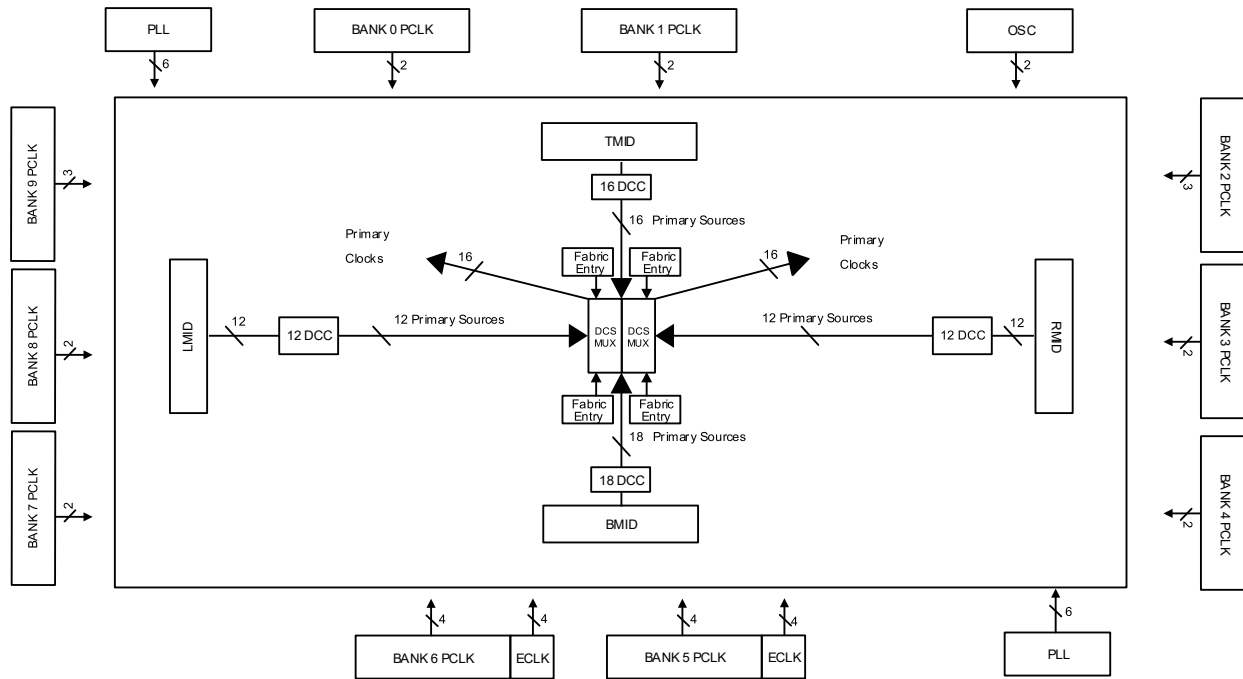


Figure 2.9. Clocking for MachXO5-NX-35/T, MachXO5-NX-65/T, and MachXO5-NX-25 Devices

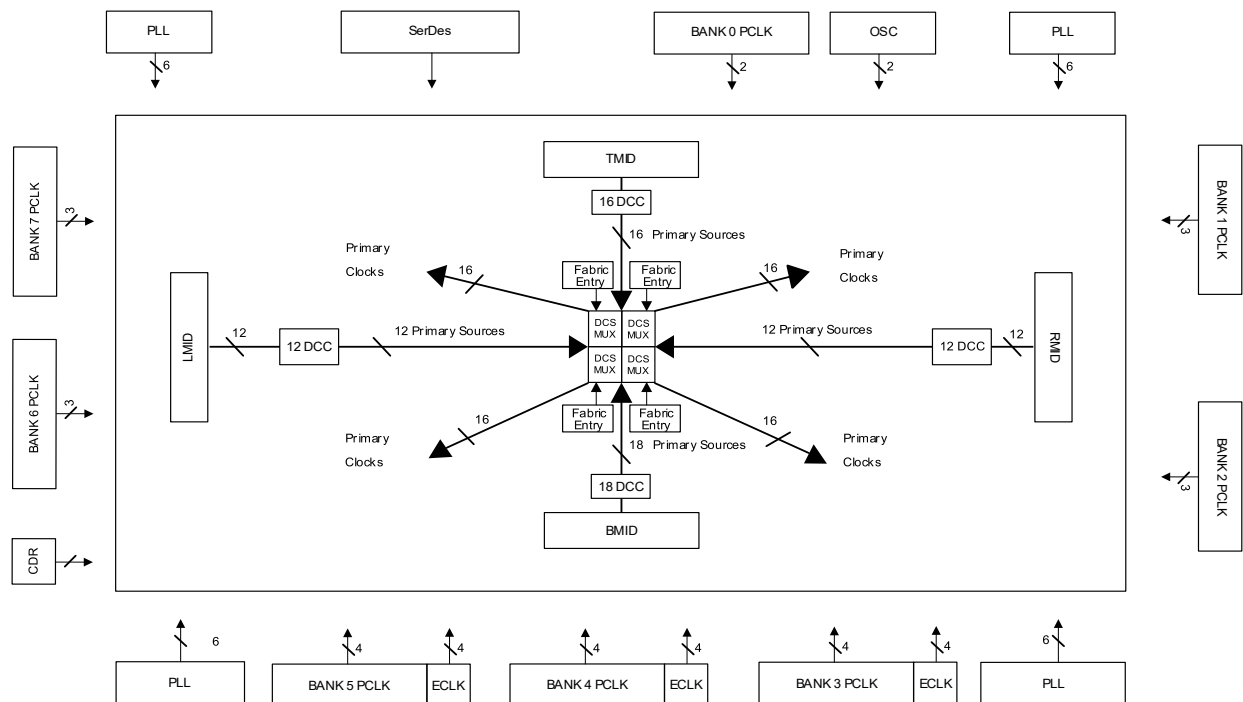


Figure 2.10. Clocking for MachXO5-NX-55T/MachXO5-NX-100T Devices

2.4.3. Primary Clocks

The MachXO5-NX device family provides low-skew, high fan-out clock distribution to all synchronous elements in the FPGA fabric through the Primary Clock Network. The MachXO5-NX PCLK clock network is a balanced clock structure which is designed to minimize the clock skew among all the final destination of the IPs in the FPGA core that needs a clock source.

The primary clock network is divided into two or four clock domains depending on the device density. Each of these domains has 16 clocks that can be distributed to the fabric in the domain.

The Lattice Radiant software can automatically route each clock to one of the domains up to a maximum of 16 clocks per domain. You can change how the clocks are routed by specifying a preference in the Lattice Radiant software to locate the clock to a specific domain. MachXO5-NX device provides you with a maximum of 64 unique clock input sources that can be routed to the primary Clock network.

Primary clock sources are:

- Dedicated clock input pins
- PLL outputs
- PCLKDIV, ECLKDIV outputs
- Internal FPGA fabric entries (with minimum general routing)
- SGMII-CDR clocks
- OSC clock

These sources are routed to each of four clock switches called a Mid Mux (LMID, RMID, TMID, BMID). The outputs of the Mid MUX are routed to the center of the FPGA where additional clock switches (DSC_CMUX) are used to route the primary clock sources to primary clock distribution to the MachXO5-NX fabric. These routing muxes are shown in [Figure 2.9](#) and [Figure 2.10](#). There are potentially 64 unique clock domains that can be used in the largest MachXO5-NX device. For more information about the primary clock tree and connections, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

2.4.4. Edge Clock

MachXO5-NX devices have a number of high-speed edge clocks that are intended for use with the PIO in the implementation of high-speed interfaces. There are four (4) ECLK networks per bank I/O on the Bottom side of the devices. For power management, the Edge clock network is powered by a separate power domain (to reduce power noise injection from the core and reduce overall noise induced jitter) while controlled by the same logic that gates the FPGA core and PCLK domains.

Each Edge Clock can be sourced from the following:

- Dedicated PIO Clock input pins (PCLK)
- DLLDEL output (PIO Clock delayed by 90°)
- PLL outputs (CLKOP, CLKOS, CLKOS2, CLKOS3, CLKOS4, and CLKOS5)
- Internal Nodes

[Figure 2.11](#) illustrates the various ECLK sources. Bank 5 is shown in the example. Other bottom side banks are similar.

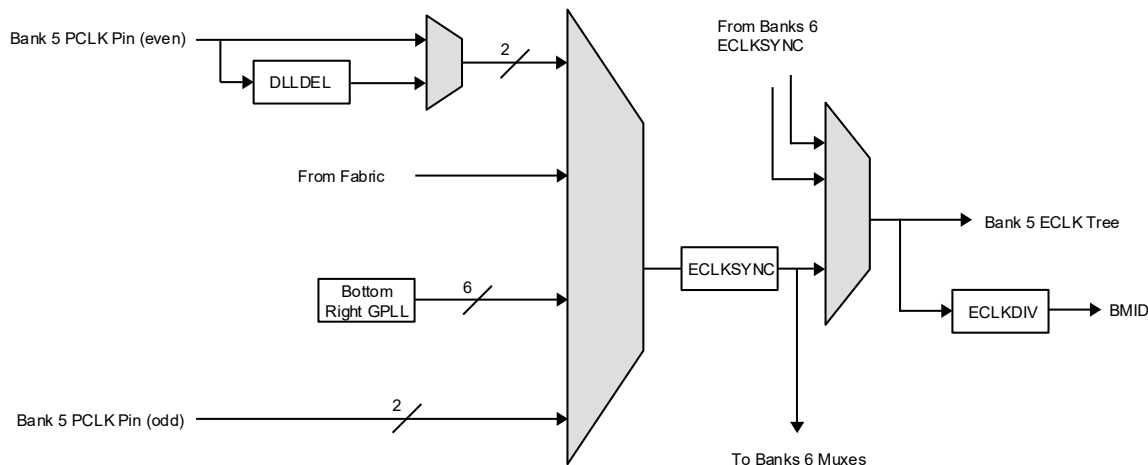


Figure 2.11. Edge Clock Sources per Bank

The edge clocks have low injection delay and low skew. They are typically used for DDR Memory or Generic DDR interfaces. For detailed information on Edge Clock connections, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

2.4.5. Clock Dividers

MachXO5-NX devices have two distinct types of clock divider, Primary and Edge. There are from one (1) to two (2) Primary Clock Divider (PCLKDIV) and which are located in the DCS_CMUX block(s) at the center of the device. There are up to twelve (12) ECLKDIV dividers per device, locate near the bottom high-speed I/O banks.

The PCLKDIV supports $\div 2$, $\div 4$, $\div 8$, $\div 16$, $\div 32$, $\div 64$, $\div 128$, and $\div 1$ (bypass) operation. The PCLKDIV is fed from a DCSMUX within the DCS_CMUX block. The clock divider output drives one input of the DCS Dynamic Clock Select within the DSC_CMUX block. The Reset (RST) control signal is asynchronously and forces all outputs to low. The divider output starts at next cycle after the reset is synchronously released. The PCLKDIV is shown in [Figure 2.12](#).

The ECLKDIV is intended to generate a slower-speed system clock from a high-speed edge clock. The block operates in a $\div 2$, $\div 3.5$, $\div 4$, or $\div 5$ mode and maintains a known phase relationship between the divided down clock and the high-speed clock based on the release of its reset signal. The ECLKDIV can be fed from selected PLL outputs, external primary clock pins (with or without DLLDEL Delay) or from routing. The clock divider outputs feed into the Bottom Mid-mux (BMID). The Reset (RST) control signal is asynchronous and forces all outputs to low. The divider output starts at next cycle after the reset is synchronously released.

The ECLKDIV block is shown in [Figure 2.11](#). For further information on clock dividers, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

2.4.6. Clock Center Multiplexor Blocks

All clock sources are selected and combined for primary clock routing through the Dynamic Clock Selector Center Multiplexor logic (DCS_CMUX). There are one (1) DCS_CMUX blocks per device. For 25k device, each DCS_CMUX block contains two (2) DCSMUX blocks, one (1) PCLKDIV, one (1) DCS block, and two (2) CMUX blocks. For 50T/100T device, each DCS_CMUX block contains four (4) DCSMUX blocks, two (2) PCLKDIV, two (2) DCS block, and four (4) CMUX blocks. See [Figure 2.12](#) and [Figure 2.13](#) for representative DCS_CMUX block diagrams.

The heart of the DCS_CMUX is the Center Multiplexor (CMUX) block, inputs up to 64 feed clock sources [mid-muxes (RMID, LMID, TMIC, BMID) and DCC] and to drive up to 16 primary clock trunk lines.

Up to two (2) clock inputs to the DCS_CMUX can be routed through a Dynamic Clock Select block, and then routed to the CMUX. One (1) input to the DCS can be optionally divided by the Primary Clock Divider (PCLKDIV). For more information about the DCS_CMUX, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

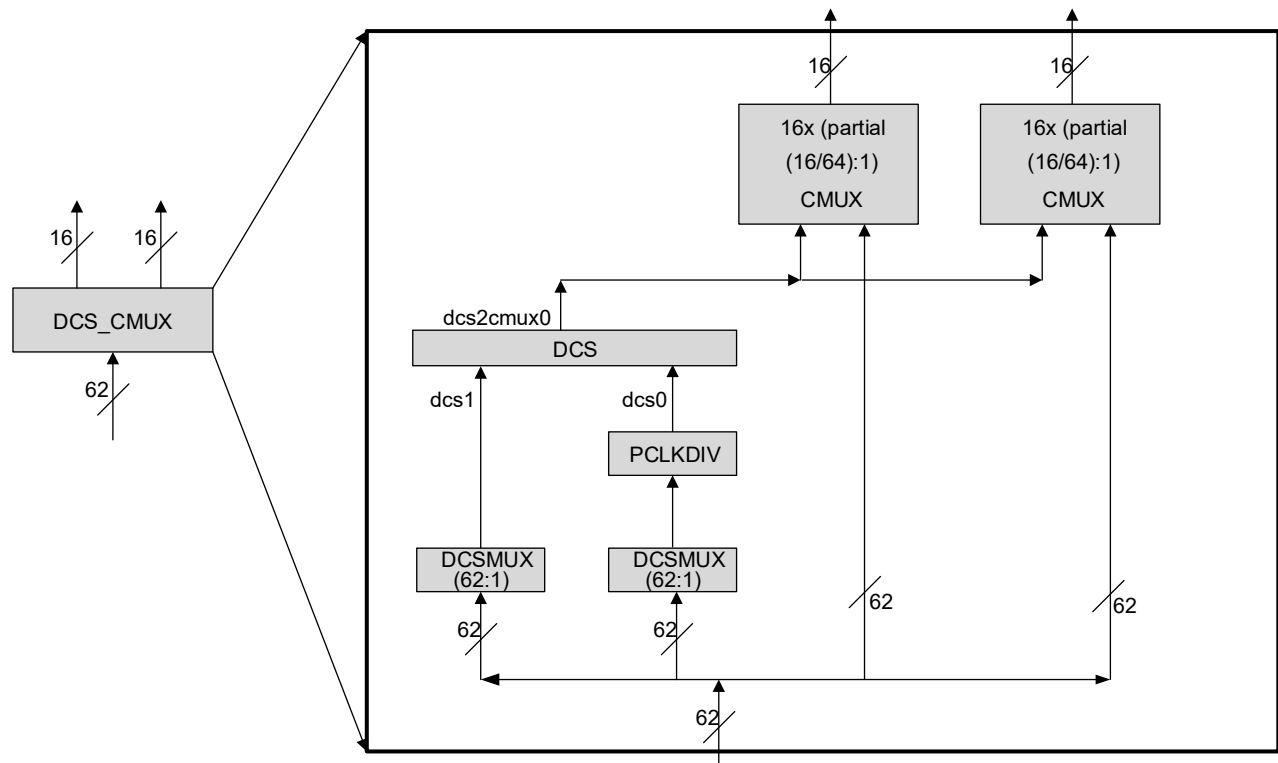


Figure 2.12. DCS_CMUX Diagram for MachXO5-NX-25 Devices

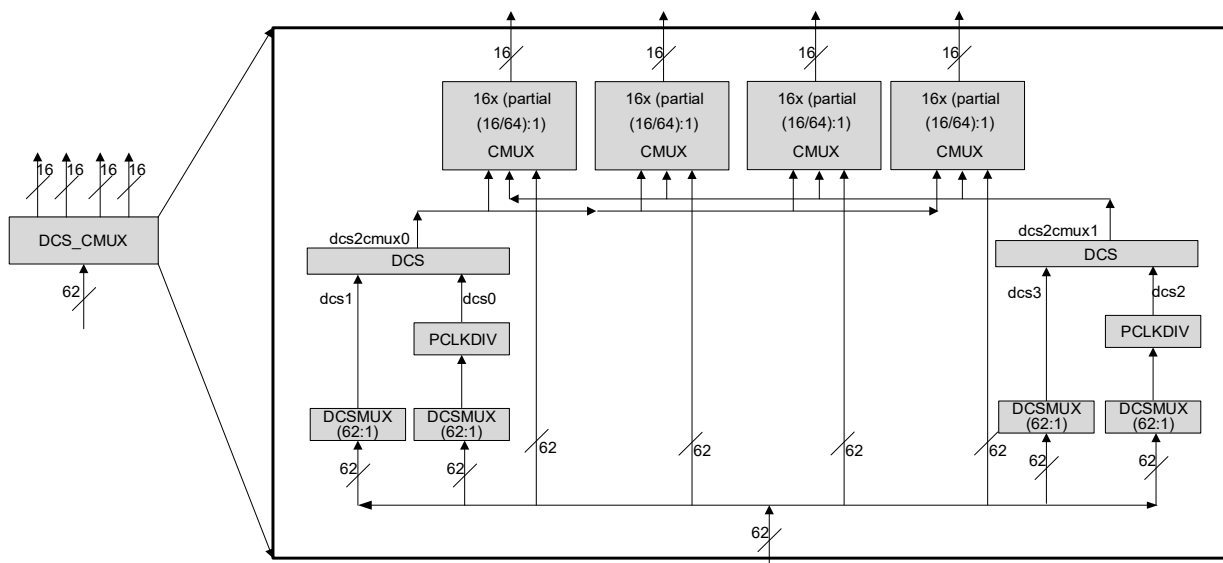


Figure 2.13. DCS_CMUX Diagram for MachXO5-NX-55T/MachXO5-NX-100T Devices

2.4.7. Dynamic Clock Select

The Dynamic Clock Select (DCS) is a smart multiplexer function available in the primary clock routing. It switches between two independent input clock sources. Depending on the operation modes, it switches between two (2) independent input clock sources either with or without any glitches. This is achieved regardless of when the select signal is toggled. Both input clocks must be running to achieve functioning glitchless DCS output clock, but running clocks are not required when used as non-glitchless normal clock multiplexer.

There are one (1) or two (2) DCS blocks per device that feed all clock domains. The DCS blocks are located in the DCS_MUX block. The inputs to the DCS blocks come from MIDMUX outputs and user logic clocks via DCC elements. The DCS elements are located at the center of the PLC array core. The output of the DCS is connected to the inputs of Primary Clock Center MUXs (CMUX).

Figure 2.14 shows the timing waveforms of the default DCS operating mode. The DCS block can be programmed to other modes. For more information about the DCS, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

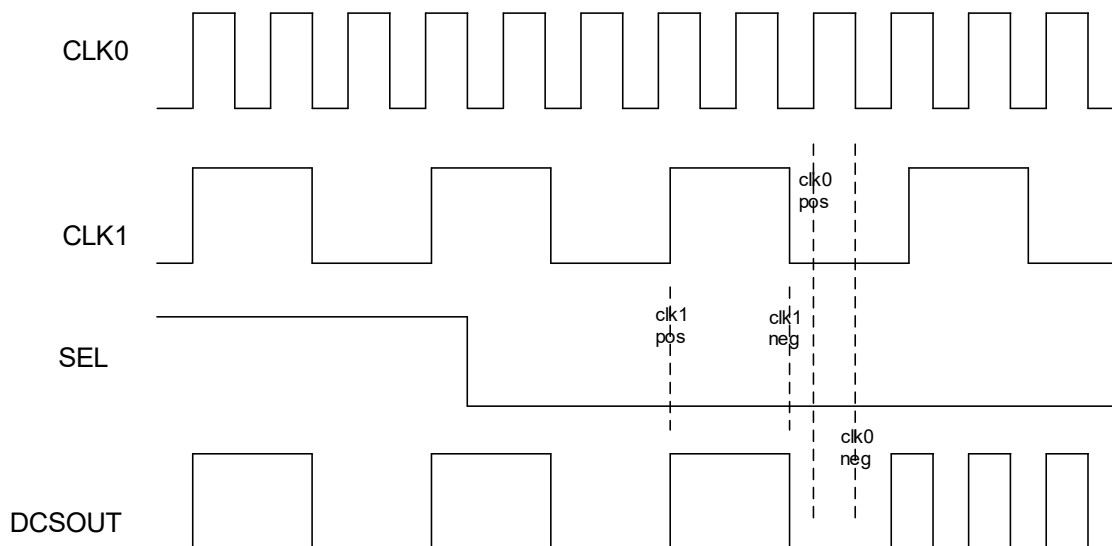


Figure 2.14. DCS Waveforms

2.4.8. Dynamic Clock Control

The Dynamic Clock Control (DCC), Domain Clock enable/disable feature allows internal logic control of the domain primary clock network. When a clock network is disabled, the clock signal is static and not toggle. All the logic fed by that clock does not toggle, reducing the overall power consumption of the device. The disable function is glitchless, and does not increase the clock latency to the primary clock network.

Four additional DCC elements control the clock inputs from the MachXO5-NX domain logic to the Center MUX elements (DSC_CMUX).

This DCC controls the clock sources from the Primary CLOCK MIDMUX before they are fed to the Primary Center MUXs that drive the domain clock network. For more information about the DCC, refer to [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#).

2.4.9. DDRDLL

The MachXO5-NX device has two identical DDRDLL blocks located in the lower left and lower right corners of the device. Each DDRDLL (master DLL block) can generate a phase shift code representing the amount of delay in a delay block that corresponding to 90-degree phase of the reference clock input, and provide this code to every individual DQS block and DLLDEL slave delay element. The reference clock can be either from PLL, or input pin. This code is used in the DQSBUF block that controls a set of DQS pin groups to interface with DDR memory (slave DLL). The DQSBUF uses this code to control the DQS input of the DDR memory to 90-degree shift to clock DQs at the center of the data eye for DDR memory interface.

The code is also sent to another slave DLL, DLLDEL, which takes a primary clock input and generates a 90-degree shift clock output to drive the clocking structure. This is useful to interface edge-aligned Generic DDR, where 90-degree clocking needs to be created. Not all primary clock inputs have associated DLLDEL control. Figure 2.15 shows DDRDLL connectivity to a DLLDEL block (connectivity to DQSBUF blocks is similar).

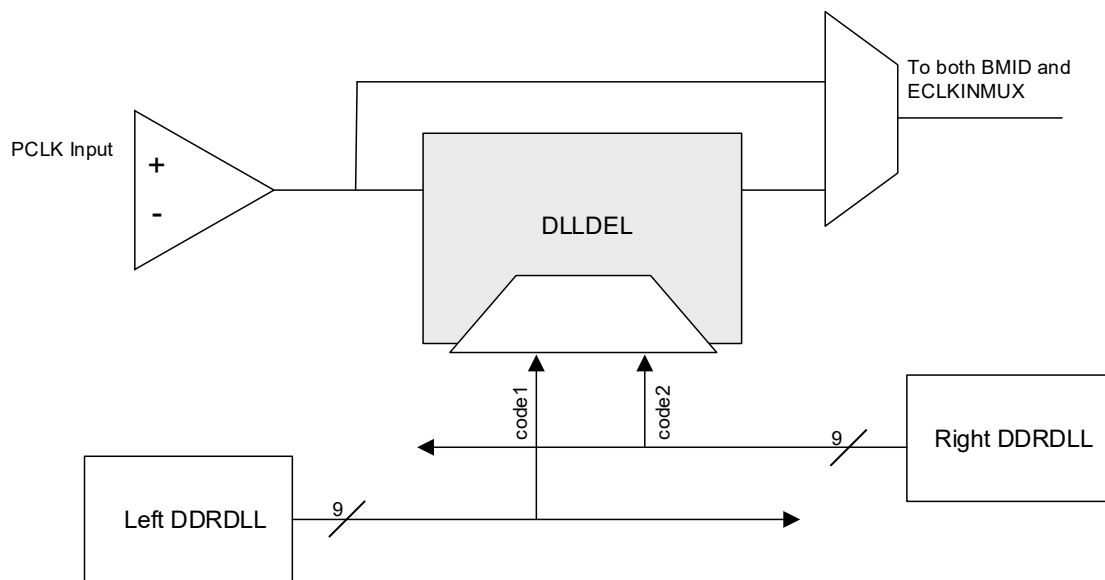


Figure 2.15. DLLDEL Functional Diagram

Each DDRDLL can generate delay code based on the reference clock frequency. The slave DLL (DQSBUF and DLLDEL) uses the code to delay the signal to create the phase shifted signal used either for DDR memory or for creating 90-degree shift clock. Figure 2.16 shows the DDRDLL and the slave DLLs on the top-level view.

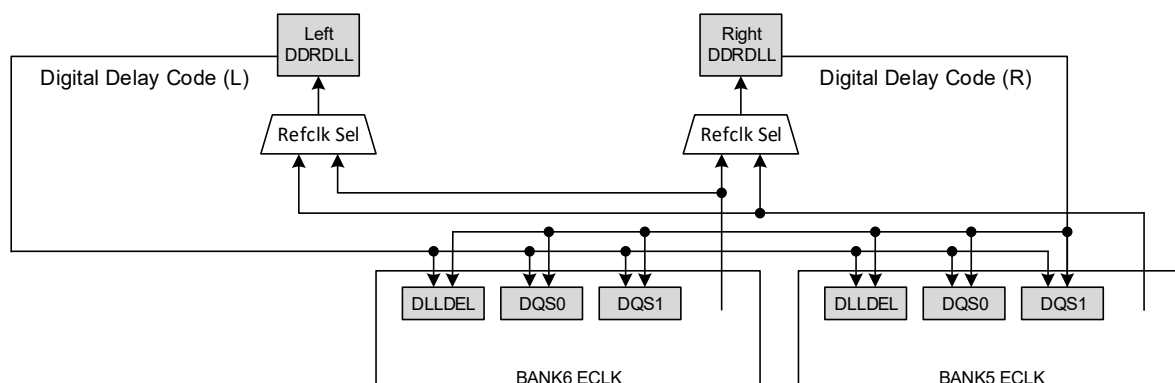


Figure 2.16. DDRDLL Architecture for MachXO5-NX-25 Devices

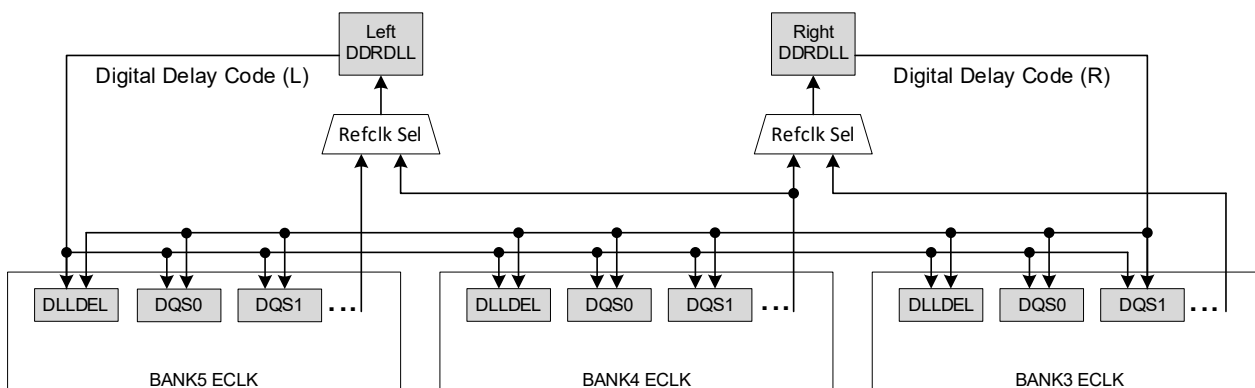


Figure 2.17. DDRDLL Architecture for MachXO5-NX-55T/MachXO5-NX-100T Devices

2.5. SGMII TX/RX

The MachXO5-NX device utilizes different components/resources for the transmit and receive paths of SGMII. For the SGMII transmit path, Generic DDR I/O with X5 gearing are used. For more information, refer to the GDDR5_TX.ECLK.Aligned interface section in the [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).

For the SGMII receive path, one of the two available hardened CDR (Clock and Data Recovery) Components can be used. There are three main blocks in each CDR: the CDR, deserializer, and FIFO. Each CDR features two loops. The first loop is locked to the reference clock. Once locked, the loop switches to the data path loop where the CDR tracks the data signals to generate the correcting signals that needed to achieve and maintain phase lock with the data. The data is then passed through a deserializer which deserializes the data to 10-bit parallel data. The 10-bit parallel data is then sent to the FIFO bridge, which allows the CDR to interface with the rest of the FPGA.

[Figure 2.18](#) shows a block diagram of the SGMII CDR IP.

The two hardened blocks are located at the bottom left of the chip and uses the high speed I/O Bank 5 for the differential pair input. It is recommended that the reference clock should be entered through a GPIO that has connection to the PLL on the lower left corner as well.

For more information on how to implement the hardened CDR for your SGMII solution, refer to the [SGMII and Gb Ethernet PCS IP Core \(FPGA-IPUG-02077\)](#).

Note: The SGMII interface using LVDS I/O has limitations when operating across the full specified temperature range. Lattice recommends using alternative interfaces, such as SERDES or RGMII, for designs requiring Gigabit Ethernet. Refer to the [Knowledge Database article](#) for details. Contact your local Lattice sales representative for more information.

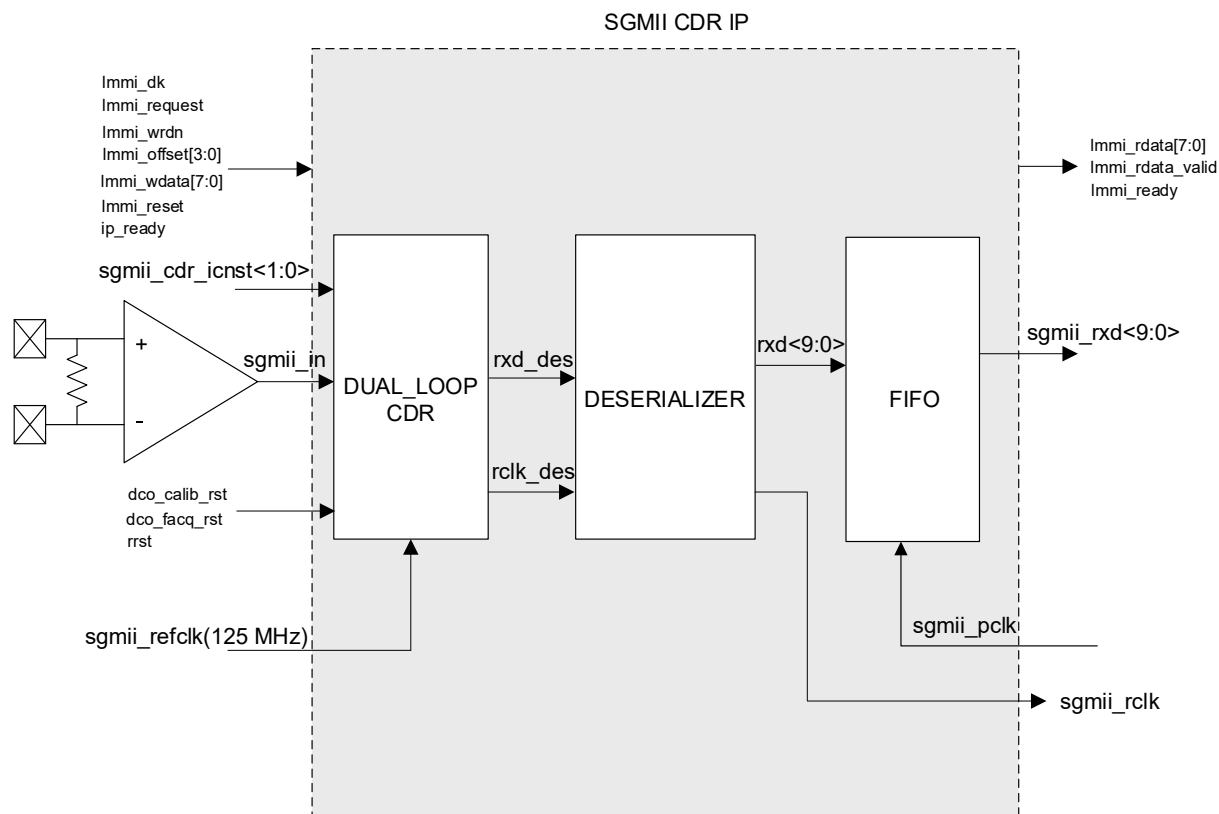


Figure 2.18. SGMII CDR IP

2.6. sysMEM Memory

MachXO5-NX devices contain a number of sysMEM Embedded Block RAM (EBR). The EBR consists of an 18 kb RAM with memory core, dedicated input registers and output registers as well as optional pipeline registers at the outputs. Each EBR includes functionality to support true dual-port, pseudo dual-port, single-port RAM, ROM and built in FIFO. In the MachXO5-NX device, unused EBR blocks is powered down to minimize power consumption.

2.6.1. sysMEM Memory Block

The sysMEM block can implement single port, dual port or pseudo dual port memories. Each block can be used in a variety of depths and widths as listed in [Table 2.4](#). FIFO can be implemented using the built-in read and write address counters and programmable full, almost full, empty and almost empty flags. The EBR block facilitates parity checking by supporting an optional parity bit for each data byte. EBR blocks provide byte-enable support for configurations with 18-bit and 36-bit data widths. For more information, refer to [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#).

EBR also provides a built in ECC engine in select speed grades (see [Ordering Information](#)). The ECC engine supports a write data width of 32 bits and it can be cascaded for larger data widths such as $\times 64$. The ECC parity generator creates and stores parity data for each 32-bit word written. When a read operation is performed, it compares the data with its associated parity data and report back if any Single Event Upset (SEU) event has disturbed the data. Any single bit data disturb is automatically corrected at the data output. In addition, two dedicated error flags indicate if a single-bit or two-bit error has occurred.

Table 2.4. sysMEM Block Configurations

Memory Mode	Configurations
Single Port	16,384 × 1
	8,192 × 2
	4,096 × 4
	2,048 × 9
	1,024 × 18
	512 × 36
True Dual Port	16,384 × 1
	8,192 × 2
	4,096 × 4
	2,048 × 9
	1,024 × 18
Pseudo Dual Port	16,384 × 1
	8,192 × 2
	4,096 × 4
	2,048 × 9
	1,024 × 18
	512 × 36

2.6.2. Bus Size Matching

All of the multi-port memory modes support different widths on each of the ports (except ECC mode, which only supports a write data width of 32 bits). The RAM bits are mapped LSB word 0 to MSB word 0, LSB word 1 to MSB word 1, and so on. Although the word size and number of words for each port varies, this mapping scheme applies to each port.

2.6.3. RAM Initialization and ROM Operation

If desired, the contents of the RAM can be pre-loaded during device configuration. By preloading the RAM block during the chip configuration cycle and disabling the write controls, the sysMEM block can also be utilized as a ROM.

2.6.4. Memory Cascading

Larger and deeper blocks of RAM can be created using EBR sysMEM Blocks. Typically, the Lattice design tools cascade memory transparently, based on specific design inputs.

2.6.5. Single, Dual and Pseudo-Dual Port Modes

In all the sysMEM RAM modes, the input data and address for the ports are registered at the input of the memory array. The output data of the memory is optionally registered at the output.

2.6.6. Memory Output Reset

The EBR utilizes latches at the A and B output ports. These latches can be reset asynchronously or synchronously. RSTA and RSTB are local signals, which reset the output latches associated with Port A and Port B, respectively. The Global Reset (GSRN) signal can reset both ports. The output data latches and associated resets for both ports are as shown in [Figure 2.19](#). The optional Pipeline Registers at the outputs of both ports are also reset in the same way.

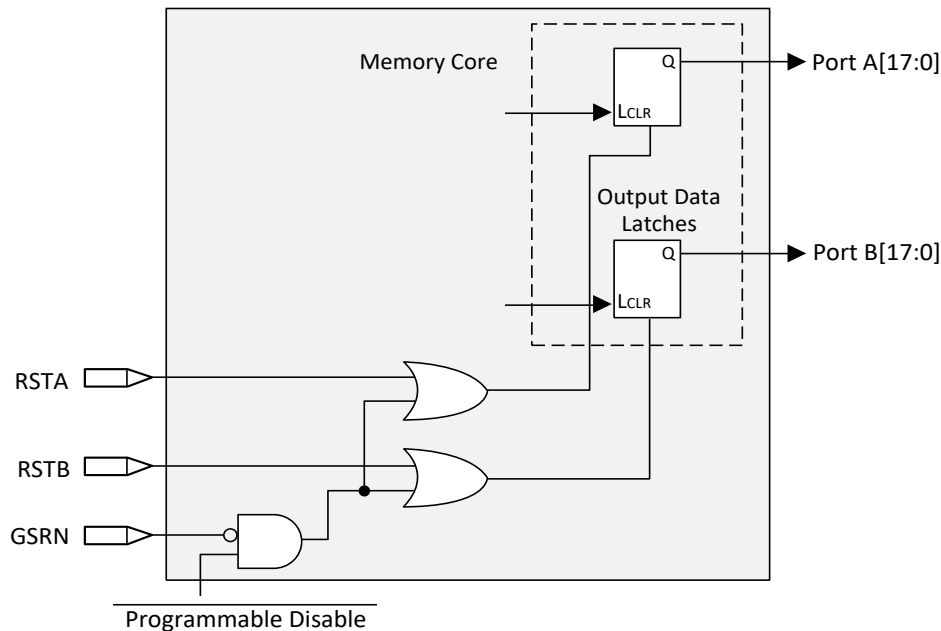


Figure 2.19. Memory Core Reset

For further information on the sysMEM EBR block, see the list of technical documentation in [Supplemental Information](#) section.

2.7. Large RAM

The MachXO5-NX device includes additional memory resources in the form of Large Random-Access Memory (LRAM) blocks.

The LRAM is designed to work as Single-Port RAM, Dual-Port RAM, Pseudo Dual-Port RAM, and ROM memories. It is designed to function as additional memory resources for you beyond what is available in the EBR and PFU.

Each individual Large RAM block contains 0.5 Mb of memory, and has a programmable data width of up to 32 bits. Cascading Large RAM blocks allows data widths up to 64 bits. Additionally, each LRAM can use either Error Correction Coding (ECC) or byte enable.

2.8. sysDSP

The MachXO5-NX family provides an enhanced sysDSP architecture, making it ideally suitable for low-cost, high-performance Digital Signal Processing (DSP) applications. Typical functions used in these applications are Finite Impulse Response (FIR) filters, Fast Fourier Transforms (FFT) functions, Correlators, Reed-Solomon/Turbo/Convolution encoders and decoders. These complex signal processing functions use similar building blocks, such as multiply-adders and multiply-accumulators.

2.8.1. sysDSP Approach Compared to General DSP

Conventional general-purpose DSP chips typically contain one to four (Multiply and Accumulate) MAC units with fixed data-width multipliers; this leads to limited parallelism and limited throughput. Their throughput is increased by higher clock speeds. In the MachXO5-NX device family, there are many DSP blocks that can be used to support different data widths. This allows you to use highly parallel implementations of the DSP functions. You can optimize DSP performance versus area by choosing appropriate levels of parallelism. [Figure 2.20](#) compares the fully serial implementation to the mixed parallel and serial implementation.

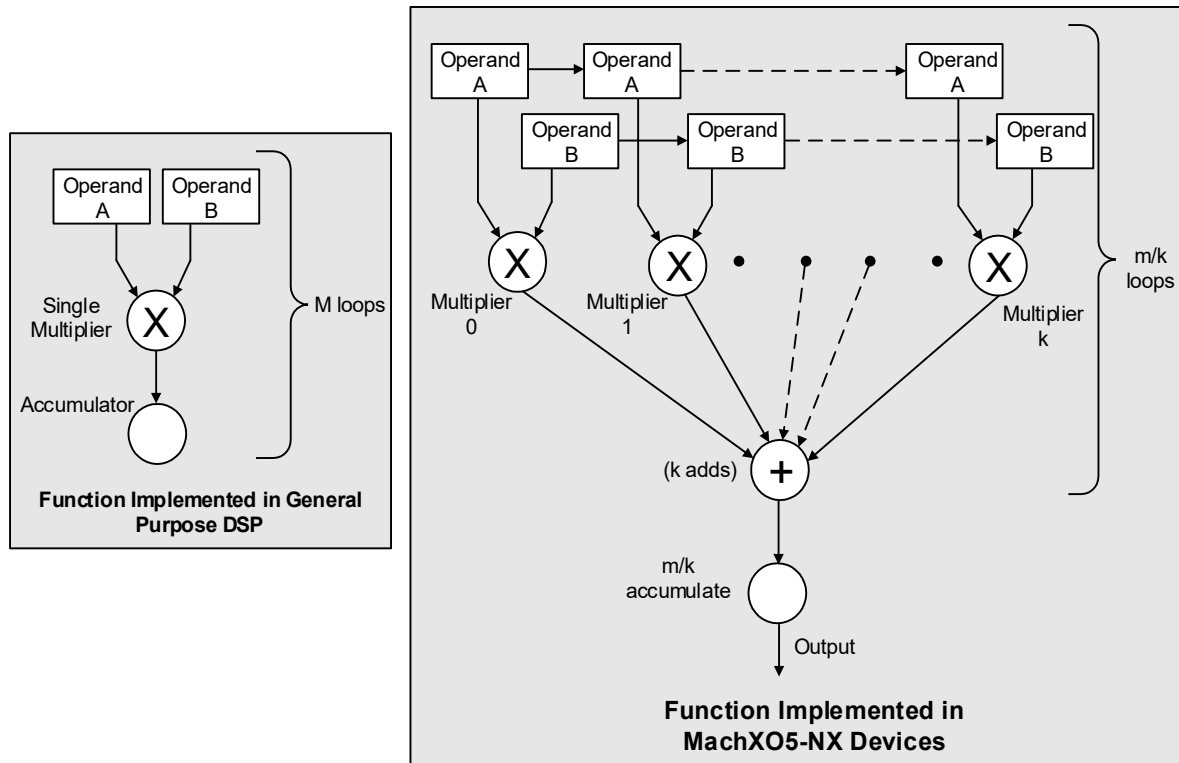


Figure 2.20. Comparison of General DSP and MachXO5-NX Approaches

2.8.2. sysDSP Architecture Features


The MachXO5-NX sysDSP Slice has been significantly enhanced to provide functions needed for advanced processing applications. These enhancements provide improved flexibility and resource utilization.

The MachXO5-NX sysDSP Slice supports many functions that include the following:

- Symmetry support. The primary target application is wireless. 1D Symmetry is useful for many applications that use FIR filters when their coefficients have symmetry or asymmetry characteristics. The main motivation for using 1D symmetry is cost/size optimization. The expected size reduction is up to 2x.
 - Odd Mode – Filter with Odd number of taps
 - Even Mode – Filter with Even number of taps
 - Two dimensional (2D) Symmetry Mode – Supports 2D filters for mainly video applications
- Dual-multiplier architecture. Lower accumulator overhead to half and the latency to half compared to single multiplier architecture.
- Fully cascadable DSP across slices. Support for symmetric, asymmetric and non-symmetric filters.
- Multiply (36×36 , two 18×36 , four 18×18 or eight 9×9)
- Multiply Accumulate (supports one 18×36 multiplier result accumulation, two 18×18 multiplier result accumulation or four 9×9 multiplier result accumulation)
- Two Multiplies feeding one Accumulate per cycle for increased processing with lower latency (two 18×18 Multiplies feed into an accumulator that can accumulate up to 54 bits)

- Pipeline registers
- 1D Symmetry support. The coefficients of FIR filters have symmetry or negative symmetry characteristics.
 - Odd Mode – Filter with Odd number of taps
 - Even Mode – Filter with Even number of taps
- 2D Symmetry support. The coefficients of 2D FIR filters have symmetry or negative symmetry characteristics.
 - 3×3 and 3×5 – Internal DSP Slice support
 - 5×5 and larger size 2D blocks – Semi internal DSP Slice support
- Flexible saturation and rounding options to satisfy a diverse set of applications situations
- Flexible cascading DSP blocks
 - Minimizes fabric use for common DSP functions
 - Enables implementation of FIR Filter or similar structures using dedicated sysDSP slice resources only
 - Provides matching pipeline registers
 - Can be configured to continue cascading from one row of sysDSP slices to another for longer cascade chains
- RTL Synthesis friendly synchronous reset on all registers, while still supporting asynchronous reset for legacy users
- Dynamic MUX selection to allow Time Division Multiplexing (TDM) of resources for applications that require processor-like flexibility that enables different functions for each clock cycle

Figure 2.21 shows the diagram of sysDSP. For most cases, as shown in Figure 2.21, the MachXO5-NX sysDSP is backwards-compatible with the LatticeECP3™ sysDSP block, such that, legacy applications can be targeted to MachXO5-NX sysDSP.

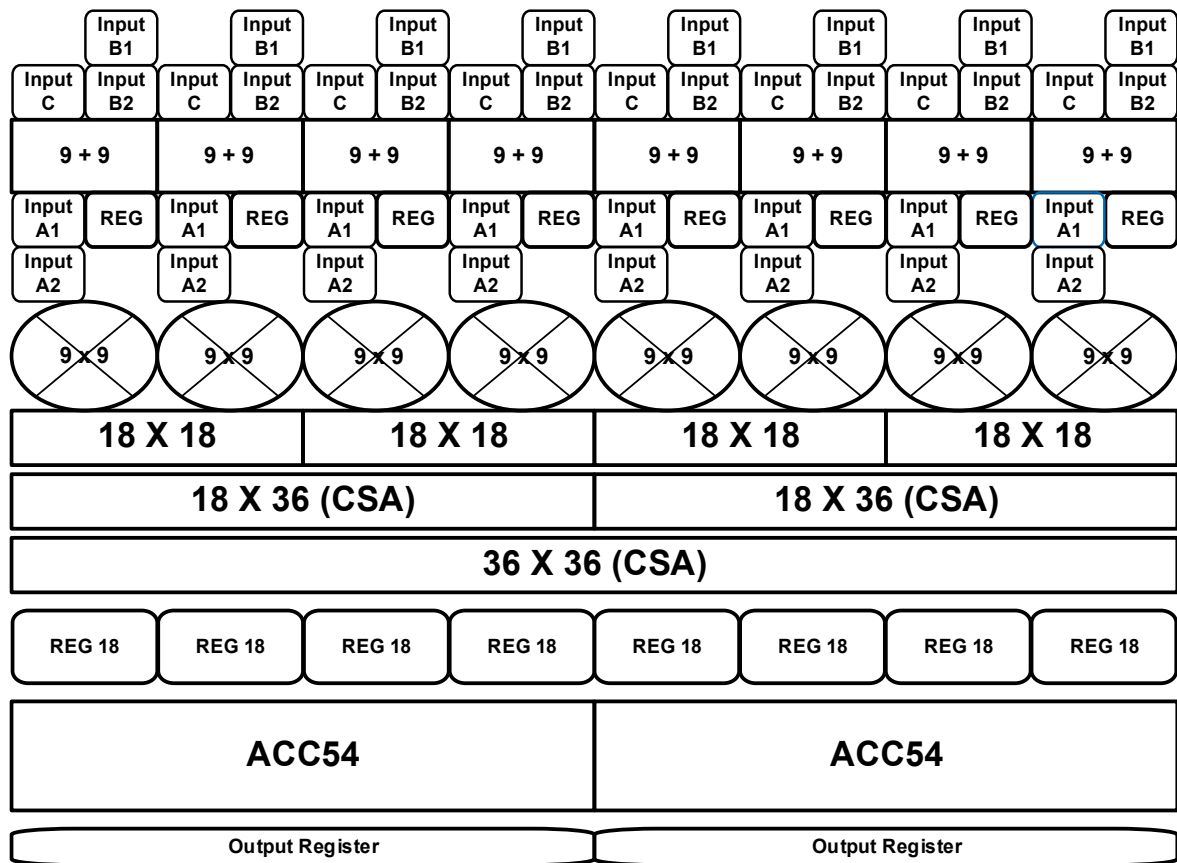

Note : All Registers inside the DSP Block are Bypassable via Configuration Setting

Figure 2.21. DSP Functional Block Diagram

The MachXO5-NX sysDSP block supports the following basic elements.

- MULT (Multiply)
- MAC (Multiply, Accumulate)
- MULTADDSUB (Multiply, Addition/Subtraction)
- MULTADDSUBSUM (Multiply, Addition/Subtraction, Summation)

Table 2.5 shows the capabilities of MachXO5-NX sysDSP block versus the above functions.

Table 2.5. Maximum Number of Elements in a sysDSP block

Width of Multiply	×9	×18	×36
MULT	8	4	1
MAC	2	2	—
MULTADDSUB	2	2	—
MULTADDSUBSUM	2	2	—

Some options are available in the four elements. The input register in all the elements can be directly loaded or can be loaded as a shift register from previous operand registers. By selecting *dynamic operation*, the following operations are possible:

- In the Add/Sub option, the Accumulator can be switched between addition and subtraction on every cycle.
- The loading of operands can switch between parallel and serial operations.

For further information, refer to [sysDSP User Guide for Nexus Platform \(FPGA-TN-02096\)](#).

2.9. Programmable I/O (PIO)

The programmable logic associated with an I/O is called a PIO. The individual PIOs are connected to their respective sysI/O buffers and pads.

On all the MachXO5-NX devices, two adjacent PIO can be combined to provide a complementary output driver pair.

2.10. Programmable I/O Cell (PIC)

The programmable I/O cells (PIC) provide I/O function and necessary gearing logic associated with PIO. MachXO5-NX consists of base PIC and gearing PIC.

Base PICs contain three blocks: an input register block, output register block, and tri-state register block. These blocks contain registers for operating in a variety of modes along with the necessary clock and selection logic. Base PICs cover the top and left/right bank. Gearing PICs contain gearing logic and edge monitor used for locating the center of data window. Gearing PICs cover the bottom banks to support DDR operation.

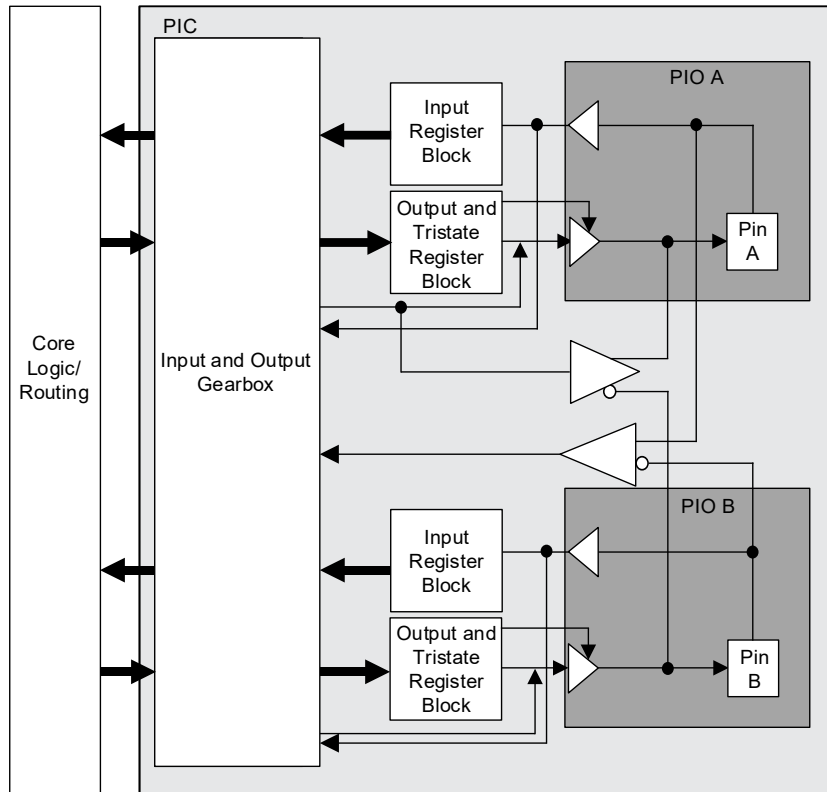


Figure 2.22. Group of Two High Performance Programmable (HPIO) I/O Cells

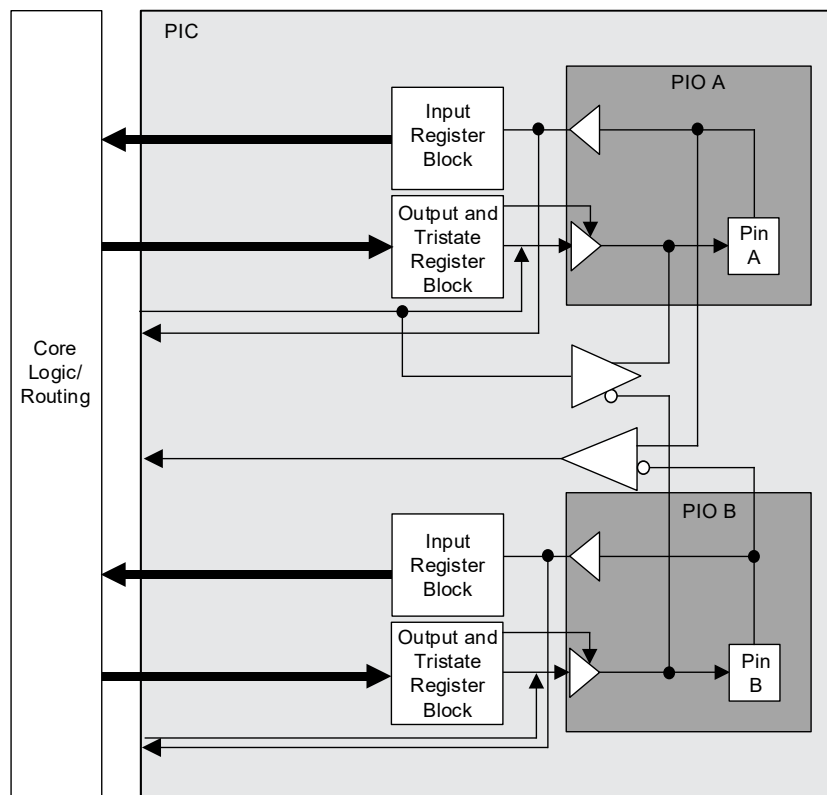


Figure 2.23. Wide Range Programmable (WRIO) I/O Cells

2.10.1. Input Register Block

The input register blocks for the PIO on all edges contain delay elements and registers that can be used to condition high-speed interface signals before they are passed to the device core. In addition, the input register blocks for the PIO on the bottom edges include the built-in FIFO logic to interface to DDR and LPDDR memory.

The Input register block on the bottom side includes gearing logic and registers to implement IDDRX1, IDDRX2, IDDRX4, IDDRX5 gearing functions. With two PICs sharing the DDR register path, it can also implement IDDRX71 function used for 7:1 LVDS interfaces. It uses three sets of registers – shift, update, and transfer to implement gearing and the clock domain transfer. The first stage registers sample the high-speed input data by the high-speed edge clock on its rising and falling edges. The second stage registers perform data alignment based on the control signals. The third stage pipeline registers pass the data to the device core synchronized to the low-speed system clock. For more information on gearing function, refer to [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).


Input FIFO

The MachXO5-NX PIO has dedicated input FIFO per single-ended pin for input data register for DDR Memory interfaces. The FIFO resides before the gearing logic. It transfers data from DQS domain to continuous ECLK domain. On the Write side of the FIFO, it is clocked by DQS clock, which is the delayed version of the DQS Strobe signal from DDR memory. On the Read side of FIFO, it is clocked by ECLK. ECLK may be any high-speed clock with identical frequency as DQS (the frequency of the memory chip). Each DQS group has one FIFO control block. It distributes FIFO read/write pointer to every PIC in same DQS group. DQS Grouping and DQS Control Block is described in [DDR Memory Support](#) section.

Table 2.6. Input Block Port Description

Name	Type	Description
D	Input	High Speed Data Input
Q[1:0]/Q[3:0]/Q[6:0]/Q[7:0]/Q[9:0]	Output	Low Speed Data to the device core
RST	Input	Reset to the Output Block
SCLK	Input	Slow Speed System Clock
ECLK	Input	High Speed Edge Clock
DQS	Input	Clock from DQS control Block used to clock DDR memory data
ALIGNWD	Input	Data Alignment signal from device core.


Figure 2.24 shows the input register block for the PIO on the top, left, and right edges.

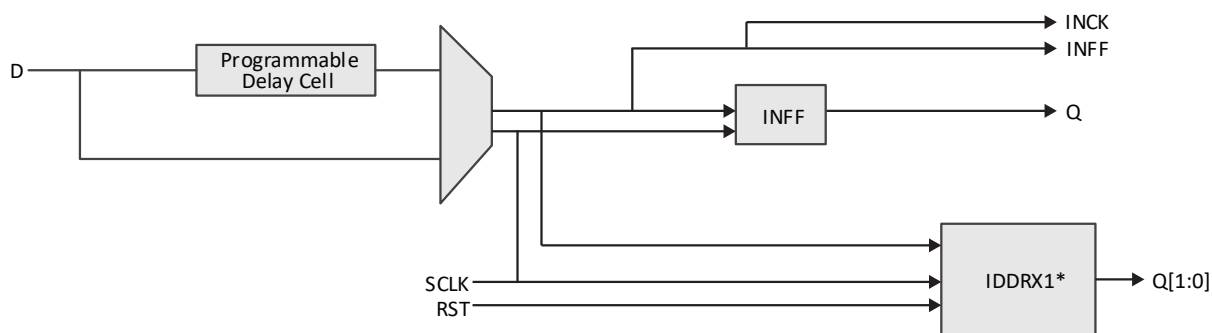

***Note:** For LFMXO5-55T and LFMXO5-100T parts, IDDRX1 supported on Left and Right sides only.

Figure 2.24. Input Register Block for PIO on Top, Left, and Right Sides of the Device

Figure 2.25 shows the input register block for the PIO located on the bottom edge.

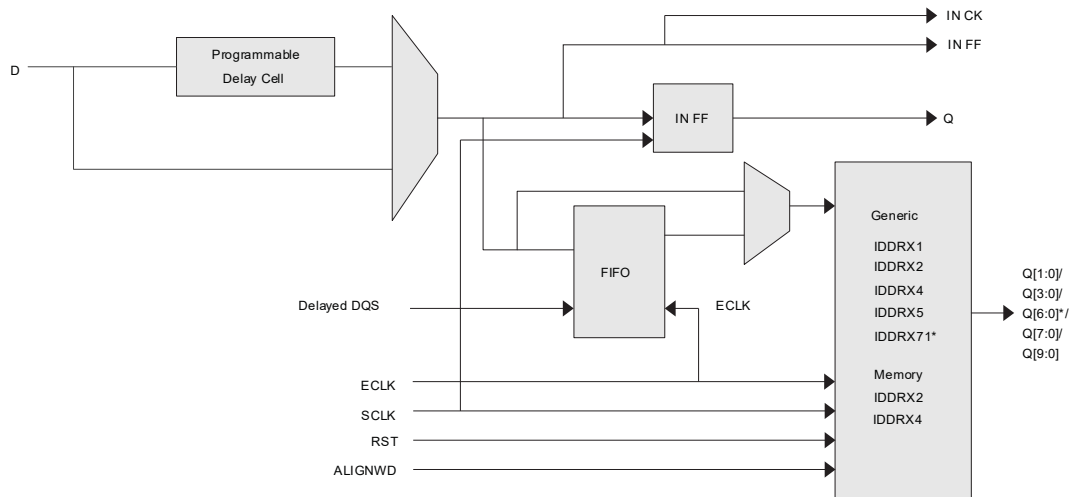

*For 7:1 LVDS interface only. It is required to use PIO pair pins (PIOA/B or PIOC/D).


Figure 2.25. Input Register Block for PIO on Bottom Side of the Device

2.10.2. Output Register Block

The output register block registers signal from the core of the device before they are passed to the sysI/O buffers.


MachXO5-NX output data path has output programmable flip flops and output gearing logic. On the bottom side, the output register block can support 1x, 2x, x4, x5, and 7:1 gearing enabling high speed DDR interfaces and DDR memory interfaces. On the top, left, and right sides, the banks support 1x gearing. MachXO5-NX output data path diagram is shown in Figure 2.26. The programmable delay cells are also available in the output data path.

For detailed description of the output register block modes and usage, you can refer to [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).

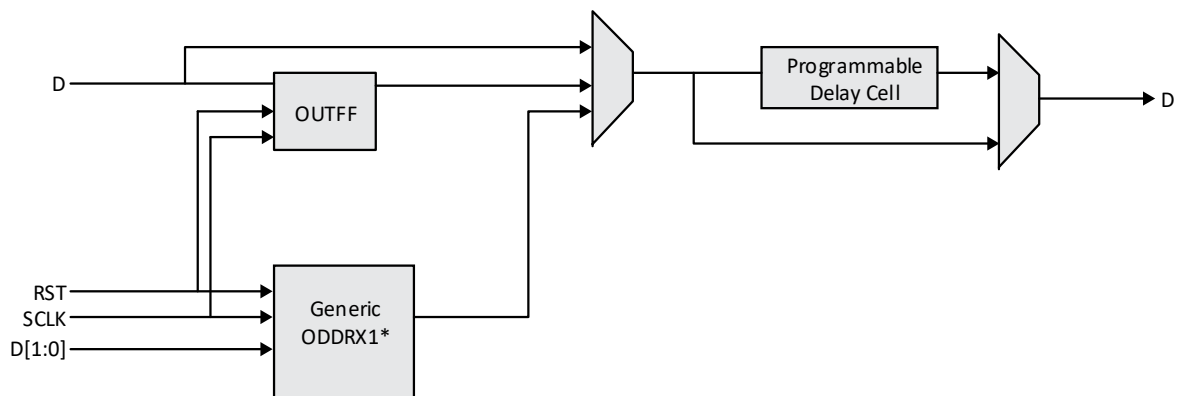

*Note: For LFMXO5-55T and LFMXO5-100T devices, ODDR1 supported on Left and Right sides only.

Figure 2.26. Output Register Block on Top, Left, and Right Sides

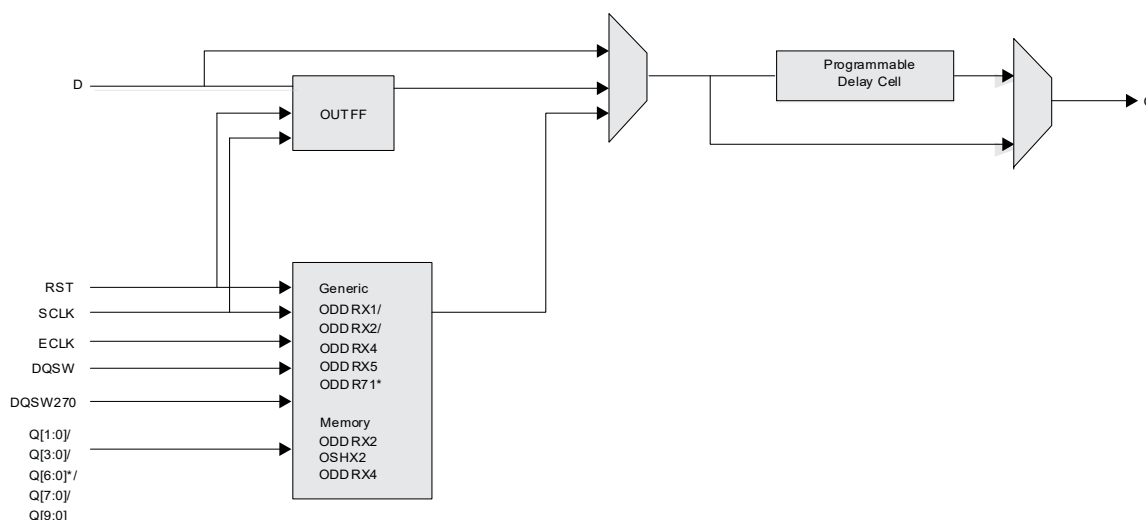

*For 7:1 LVDS interface only. It is required to use PIO pair pins PIOA/B.

Figure 2.27. Output Register Block on Bottom Side

Table 2.7. Output Block Port Description

Name	Type	Description
Q	Output	High Speed Data Output
D	Input	Data from core to output SDR register
Q[1:0]/Q[3:0]/Q[6:0]/Q[7:0]/Q[9:0]	Input	Low Speed Data from device core to output DDR register
RST	Input	Reset to the Output Block
SCLK	Input	Slow Speed System Clock
ECLK	Input	High Speed Edge Clock
DQSW	Input	Clock from DQS control Block used to generate DDR memory DQS output
DQSW270	Input	Clock from DQS control Block used to generate DDR memory DQ output

2.10.3. Tri-state Register Block

The tri-state register block registers tri-state control signals from the core of the device before they are passed to the sys/O buffers. The block contains a register for SDR operation. In SDR, TD input feeds one of the flip-flops and then feeds the output. In DDR, operation used mainly for DDR memory interface can be implemented on the bottom side of the device. Here, two inputs feed the tri-state registers clocked by both ECLK and SCLK.

Figure 2.28 and Figure 2.29 show the Tri-state Register Block functions on the device. For detailed description of the tri-state register block modes and usage, refer to [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).

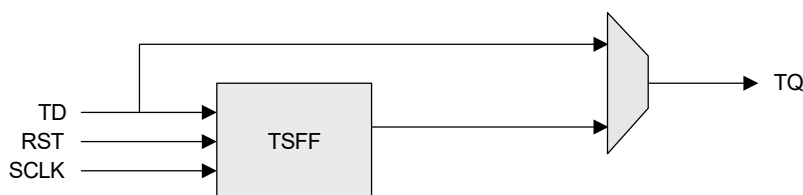


Figure 2.28. Tri-state Register Block on Top, Left, and Right Sides

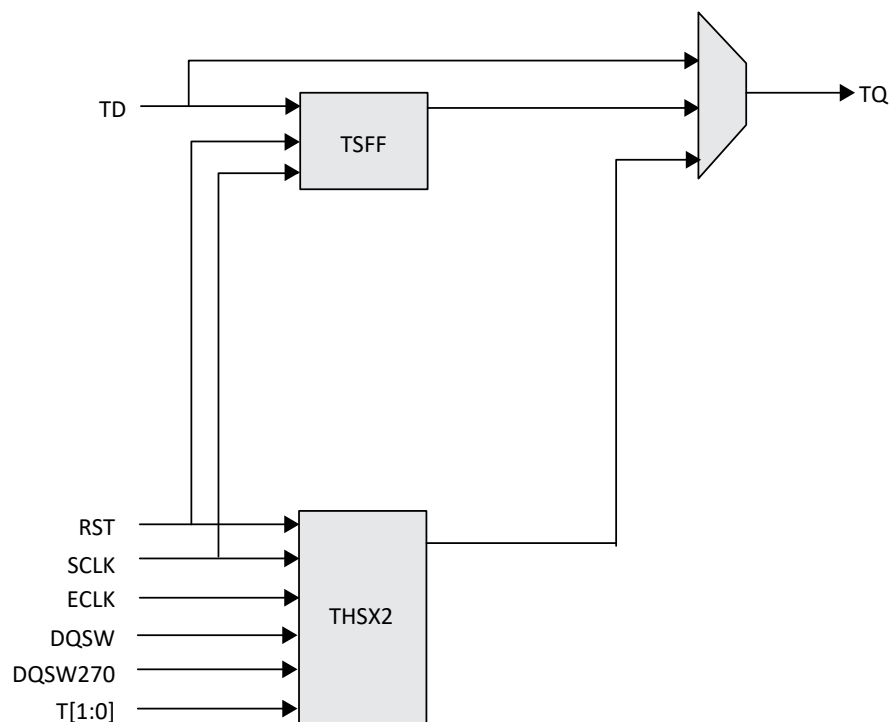


Figure 2.29. Tri-state Register Block on Bottom Side

Table 2.8. Tri-state Block Port Description

Name	Type	Description
TD	Input	Tri-state Input to Tri-state SDR Register
RST	Input	Reset to the Tri-state Block
T[1:0]	Input	Tri-state input to TSHX2 function
SCLK	Input	Slow Speed System Clock
ECLK	Input	High Speed Edge Clock
DQSW	Input	Clock from DQS control Block used to generate DDR memory DQS output
DQSW270	Input	Clock from DQS control Block used to generate DDR memory DQ output
TQ	Output	Output of the Tri-state block

2.11. DDR Memory Support

2.11.1. DQS Grouping for DDR Memory

Some PICs have additional circuitry to allow the implementation of high-speed source synchronous and DDR3/DDR3L/LPDDR4 memory interfaces. The support varies by the edge of the device as detailed below.

The Bottom bank PIC has fully functional elements supporting DDR3/DDR3L/LPDDR4 memory interfaces. Every 12 PIO on the bottom side are grouped into one DQS group, as shown in Figure 2.30. Within each DQS group, there are two pre-placed pins for DQS and DQS# signals. The rest of the pins in the DQS group can be used as DQ signals and DM signal. The number of the pins in each DQS group bonded out is package dependent. DQS groups with less than 11 pins bonded out can only be used for Command/Address busses. In DQS groups with more than 11 pins bonded out, up to two pre-defined pins are assigned to be used as virtual V_{CCIO}, by driving these pins to HIGH, and connecting these pins to V_{CCIO} power supply. These

connections create soft connections to V_{CCIO} thru these output pins, and make better connections on V_{CCIO} to help to reduce SSO noise. For details, refer to [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).

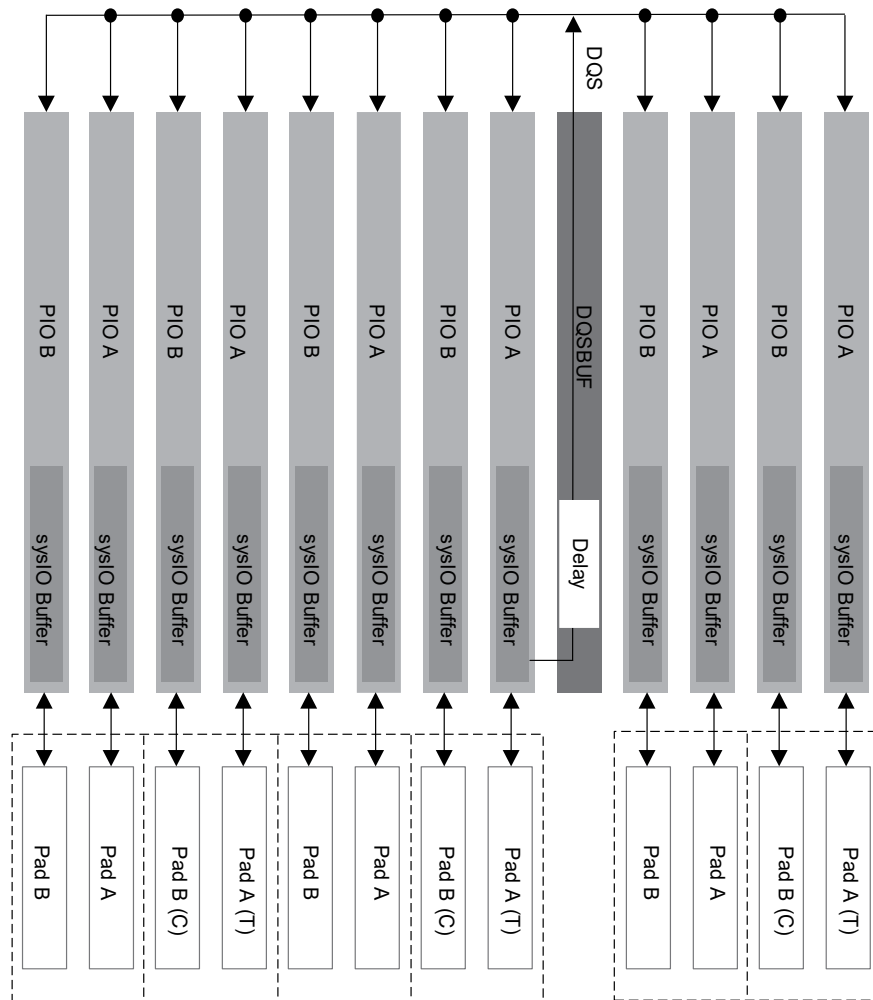


Figure 2.30. DQS Grouping on the Bottom Edge

2.11.2. DLL Calibrated DQS Delay and Control Block (DQSBUF)

To support DDR memory interfaces (DDR3/DDR3L/LPDDR4), the DQS strobe signal from the memory must be used to capture the data (DQ) in the PIC registers during memory reads. This signal is output from the DDR memory device aligned to data transitions and must be time shifted before it can be used to capture data in the PIC. This time shift is achieved by using DQSBUF programmable delay line in the DQS Delay Block (DQS read circuit). The DQSBUF is implemented as a slave delay line and works in conjunction with a master DDRDLL.

This block also includes slave delay line to generate delayed clocks used in the write side to generate DQ and DQS with correct phases within one DQS group. There is a third delay line inside this block used to provide the write-leveling feature for DDR write if needed.

Each of the read and write side delays can be dynamically shifted using margin control signals that can be controlled by the core logic.

FIFO Control Block included here generates the Read and Write Pointers for the FIFO block inside the Input Register Block. These pointers are generated to control the DQS to ECLK domain crossing using the FIFO module.

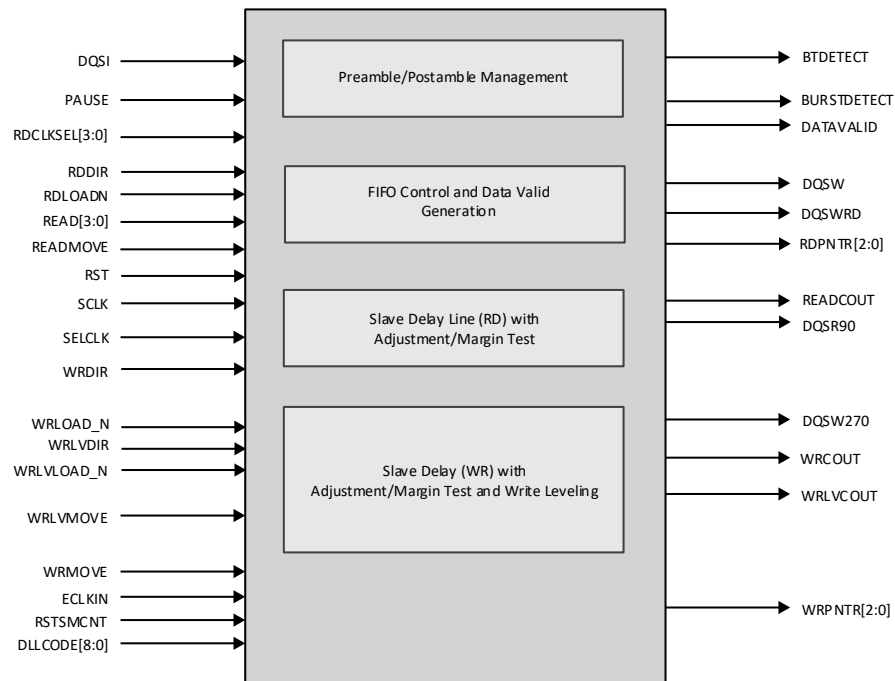


Figure 2.31. DQS Control and Delay Block (DQSBUF)

Table 2.9. DQSBUF Port List Description

Name	Type	Description
DQSI	Input	DQS signal from IO through the PIC.
PAUSE	Input	To stop ECLK for DDR3/LPDDR4 Write leveling and DLL code update.
RDCLKSEL[3:0]	Input	Select read clock source and polarity control (from CIB).
RDDIR	Input	0 – to increase the code. 1 – to decrease the code for DDR read.
RDLOADN	Input	1b0 – When mc1_mt_en_read=1b1 and read_load_n=1b0 the read_move pulse needs to be generated to the load the preload value consisting of the {mc1_sign_read, mc1_s_read [8:0]} value. 1b1 – When counter has preload value, read_move pulse can be used to increment and decrement the counter based on the read_direction signal value and mc1_mt_en_write should be set 1b1.
READ[3:0]	Input	Read signal for DDR read mode (from CIB).
READMOVE	Input	Move pulse needs to be at least 1 sclk cycle and should be greater than 5ns at TT corner. Pulse is used along with the eclk to generate the internal 'mov' signal to update the counter by one value. The count up or down is determined by the read_direction port.
RST	Input	DQS reset control for both DDR/CDR modes (from CIB).
SCLK	Input	SCLK from SCLK tree (CIB).
SELCLK	Input	Select the clock to be used between the output of the read section's delay cell or sclk.
WRDIR	Input	0 – to increase the code. 1 – to decrease the code for DDR write.
WRLOAD_N	Input	1b0 – When mc1_mt_en_write=1b1 and write_load_n=1b0 the write_move pulse needs to be generated to the load the preload value consisting of the {mc1_sign_write, mc1_s_write [8:0]} value. 1b1 – When counter has preload value, write_move pulse can be used to increment and decrement the counter based on the write_direction signal value and mc1_mt_en_write should be set 1b1.
WRLVDIR	Input	0 – to increase the code. 1 – to decrease the code for DDR write leveling.
WRLVLOAD_N	Input	1b0 – 9-bit counter in reset operation. 1b1 – When mc1_mt_en_write_leveling=1b1 and write_leveling_load_n=1b1 the counter can be incremented/decremented based on the direction signal using the write_leveling_move signal.
WRLVMOVE	Input	Move pulse needs to be at least 1 sclk cycle and should be greater than 5 ns at TT corner. Pulse is used along with the eclk to generate the internal 'mov' signal to update the counter by one value. The count up or down is determined by the write_leveling_direction port.
WRMOVE	Input	Move pulse needs to be at least 1 sclk cycle and should be greater than 5ns at TT corner. Pulse is used along with the eclk to generate the internal 'mov' signal to update the counter by one value. The count up or down is determined by the write_direction port.
ECLKIN	Input	ECLK from four different ECLK tree output.
RSTSMCNT	Input	Signal to reset the smoothing counters used for the Read, Write, and Write leveling delays.
DLLCODE[8:0]	Input	DLL code selected from the DLL code routing mux.
BTDETECT	Output	READ burst detect output (to CIB).
BURSTDetect	Output	The burst_det_sclk signal is generated using burst_det and is asserted on the rising edge of SCLK.
DATAVALID	Output	Data Valid Flag for READ mode (to CIB).
DQSW	Output	ECLK phase shifted or delayed, goes to the dqsw tree through the PIC.

Name	Type	Description
DQSWRD	Output	The read training clock adjusted in the write section. The read_clk_sel[3:0] determines the selected delay and read enable position.
RDPNTR[2:0]	Output	FIFO control READ pointer (3-bits) to FIFO in PIC (through each tree to IOL).
READCOUT	Output	Margin test output flag for READ to indicate the under-flow or over-flow.
DQSR90	Output	DQSI phase shifted or delayed by 90-degree output (through DQSR tree to IOL).
DQSW270	Output	ECLK phase shifted or delayed by 270-degree output (through DQSW270 tree to IOL).
WRCOUT	Output	Margin test output flag for WRITE to indicate the under-flow or over-flow.
WRLVCOUT	Output	Margin test output flag for WRITE LEVELING to indicate the under-flow or over-flow.
WRPNTR[2:0]	Output	FIFO control WRITE pointer (3-bits) to FIFO in PIC (through each tree to IOL).

2.12. sysI/O Buffer

Each I/O is associated with a flexible buffer referred to as a sysI/O buffer. These buffers are arranged around the periphery of the device in groups referred to as banks. The sysI/O buffers allows you to implement the wide variety of standards that are found in today's systems including LVDS, HSUL, SSTL, and LVSTL Class I and II, LVCMOS, LVTTTL, and MIPI.

The MachXO5-NX family contains multiple Programmable I/O Cell (PIC) blocks. Each PIC contains two Programmable I/O, PIOA and PIOB. Each PIO includes a sysI/O buffer and I/O logic. Two adjacent PIO can be joined to provide a differential I/O pair. These two pairs are referred to as True and Comp, where True Pad is associated with the positive side of the differential I/O, and the complement with the negative.

The top, left and right side banks support I/O standards from 3.3 V to 1.0 V while the bottom supports I/O standards from 1.8 V to 1.0 V. Every pair of I/O on the bottom bank also have a true LVDS and SLVS Tx Driver. In addition, the bottom bank supports single-ended input termination. Both static and dynamic termination are supported. Dynamic termination is used to support the DDR/LPDDR interface standards. For more information about DDR implementation in I/O Logic and DDR memory interface support, refer to [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#).

2.12.1. Supported sysI/O Standards

MachXO5-NX sysI/O buffer supports both single-ended differential and differential standards. Single-ended standards can be further subdivided into internally ratioed standards, such as LVCMOS, LVTTTL, and external referenced standards such as HSUL, SSTL, and LVSTL. The buffers support the LVTTTL, LVCMOS 1.0 V, 1.2 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V standards. Differential standards supported include LVDS, SLVS, differential LVCMOS, differential SSTL, differential HSUL, and differential LVSTL. For better support of video standards, subLVDS and MIPI_D-PHY are also supported. Table 2.10 and Table 2.11 provide a list of sysI/O standards supported in MachXO5-NX devices.

Table 2.10. Single-Ended I/O Standards

Standard	Input	Output	Bi-directional
LVTTTL33	Yes	Yes	Yes
LVCMOS33	Yes	Yes	Yes
LVCMOS25	Yes	Yes	Yes
LVCMOS18	Yes	Yes	Yes
LVCMOS15	Yes	Yes	Yes
LVCMOS12	Yes	Yes	Yes
LVCMOS10	Yes	No	No
HTSL15 I	Yes	Yes	Yes
SSTL 15 I	Yes	Yes	Yes
SSTL 135 I	Yes	Yes	Yes
HSUL12	Yes	Yes	Yes
LVSTL_I ²	Yes	Yes	Yes
LVSTL_II ²	Yes	Yes	Yes
LVCMOS18H	Yes	Yes	Yes
LVCMOS15H	Yes	Yes	Yes
LVCMOS12H	Yes	Yes	Yes
LVCMOS10H	Yes	Yes	Yes
LVCMOS10R	Yes	—	Yes ¹

Notes:

1. Output supported by LVCMOS10H.
2. Only supported in MachXO5-NX-55T and MachXO5-NX-100T devices.

Table 2.11. Differential I/O Standards

Standard	Input	Output	Bi-directional
LVDS	Yes	Yes	Yes
SUBLVDS	Yes	No	—
SLVS	Yes	Yes	—
SUBLVDSE	—	Yes	—
SUBLVDSEH	—	Yes	—
LVDSE	—	Yes	—
MIPI_D-PHY	Yes	Yes	Yes
HSTL15D_I	Yes	Yes	Yes
SSTL15D_I	Yes	Yes	Yes
SSTL15D_II	Yes	Yes	Yes
SSTL135D_I	Yes	Yes	Yes
SSTL135D_II	Yes	Yes	Yes
LVSTLD_I ¹	—	—	Yes
LVSTLD_II ¹	—	—	Yes
HSUL12D	Yes	Yes	Yes
LVTTTL33D	—	Yes	—
LVC MOS33D	—	Yes	—
LVC MOS25D	—	Yes	—

Note:

1. Only supported in MachXO-NX-55T and MachXO5-NX-100T devices.

2.12.2. sysI/O Banking Scheme

MachXO5-NX devices have up to 11 banks in total.

For each LFMXO5-25 part, there are ten banks in total. There are two banks on the top, three banks each at the left and right side of the device, and two on the bottom side of the device. Bank 1 can only support VCCIO 3.3 V, Bank 0, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9 support up to VCCIO 3.3 V, while Bank 5 and Bank 6 can support up to VCCIO 1.8 V. In addition, Bank 5 and Bank 6 support two VREF input for its flexibility to receive two different referenced input levels on the same bank. [Figure 2.32](#) shows the location of each bank.

For each LFMXO5-55T or LFMXO5-100T part, there are eight banks in total. There is one bank on top, two banks each on the left and right side of the device, and three on the bottom side of the device. Bank 0 can only support VCCIO 3.3 V, Bank 1, Bank 2, Bank 6 and Bank 7 support up to VCCIO 3.3 V, while Bank 3, Bank 4 and Bank 5 can support up to VCCIO 1.8 V. In addition, Bank 3, Bank 4 and Bank 5 support two VREF input for its flexibility to receive two different referenced input levels on the same bank. [Figure 2.33](#) shows the location of each bank.

For each LFMXO5-35/T or LFMXO5-65/T part, there are eleven banks in total. Two banks are on the top, bank 0 and bank 1; three banks are on left side, bank 7, bank 8, and bank 9; three banks are on the right side, bank 2, bank 3, and bank 4; and three banks are on the bottom, bank 5, bank 6, and bank 11. Note that there is no bank 10. The bottom banks have 2 VREF inputs for flexibility to receive two referenced input levels in the same bank. [Figure 2.34](#) shows the location of each bank. Bank 1 can only support VCCIO 3.3 V, Bank 0, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9, and Bank 11 support VCCIO 1.2 V up to VCCIO 3.3 V, while Bank 5 and Bank 6 can support VCCIO 1.0 V up to VCCIO 1.8 V.

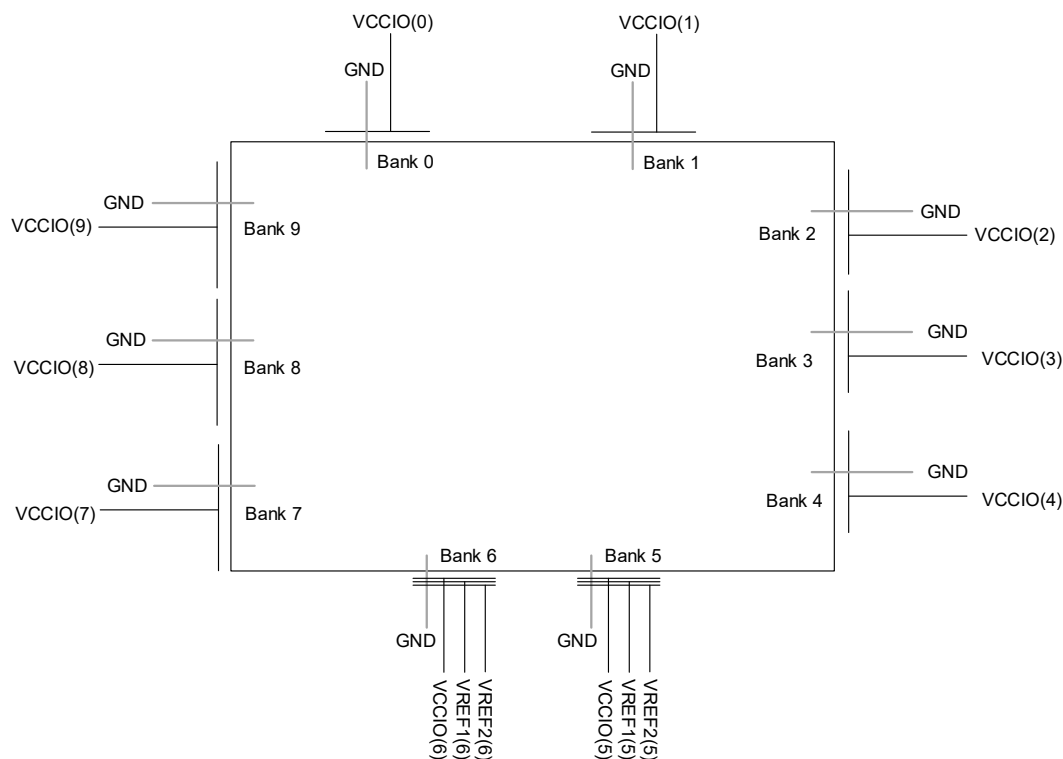


Figure 2.32. sysI/O Banking of MachXO5-NX-25 Devices

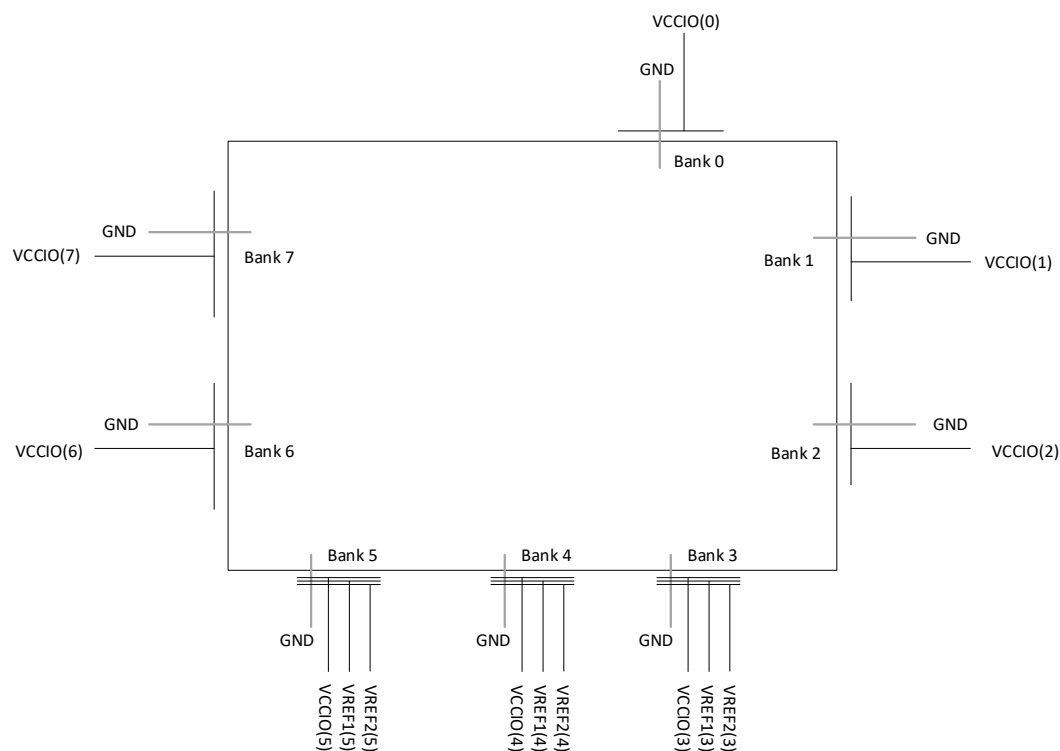


Figure 2.33. sysI/O Banking of MachXO5-NX-55T/MachXO5-NX-100T Devices

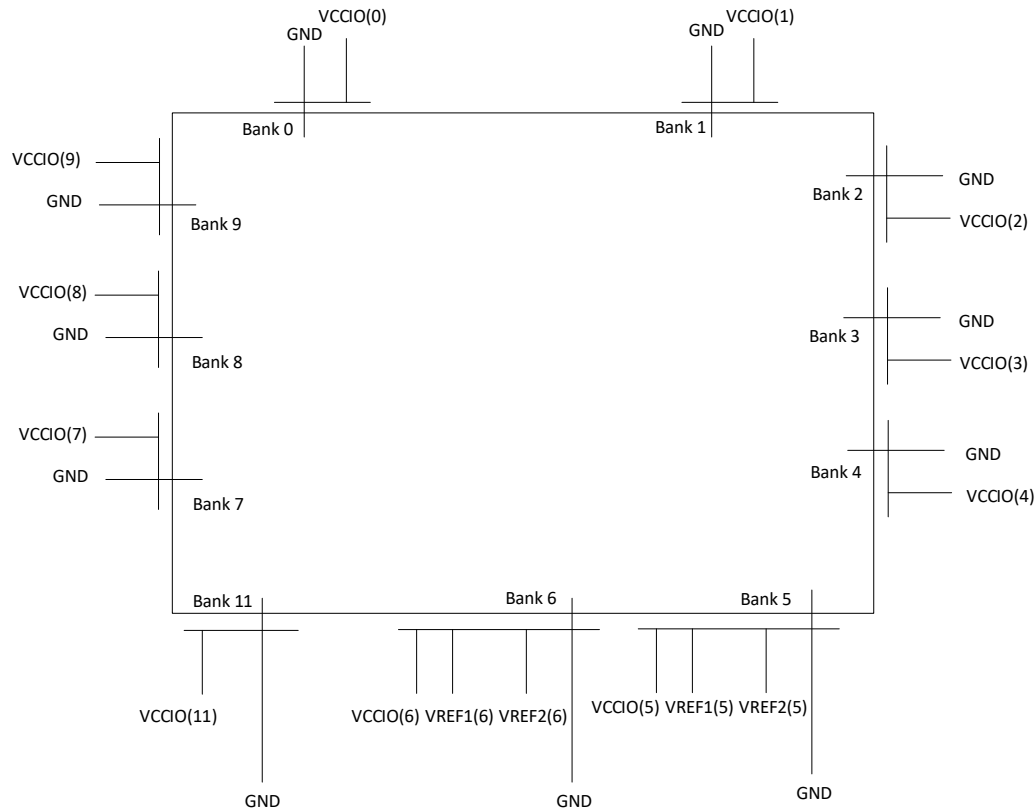


Figure 2.34. sysI/O Banking of MachXO5-NX-35T/MachXO5-NX-65T Devices

2.12.3. sysI/O Considerations

Typical sysI/O I/O Behavior During Power-up

The internal Power-On-Reset (POR) signal is deactivated when V_{CC} , V_{CCAUX} , V_{CCIO0} , and V_{CCIO1} (LFMX05-55T/100T) or V_{CCIO1} and V_{CCIO2} (LFMX05-35/T, LFMX05-65/T, and LFMX05-25) have reached satisfactory levels. After the POR signal is deactivated, the FPGA core logic becomes active. The power supply network must ensure that all other V_{CCIO} banks are active with valid input logic levels to properly control the output logic states of all the I/O banks that are critical to the application. For more information on controlling the output logic state with valid input logic levels during power-up in MachXO5-NX devices, see the information and references below.

The V_{CC} and V_{CCAUX} supply the power to the FPGA core fabric, whereas the V_{CCIO} supplies power to the I/O buffers.

For the different power supply voltage levels by the I/O banks, refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for detailed information.

The state of WRIO from the time when power is supplied until the POR signal is deactivated is undefined. In applications where the WRIO must remain at a logic low level during power rail ramp-up and before POR deactivation, the following options are available^{1,2}. No action is required for HPIO banks or signals.

Option 1: Specific power-up sequence.

- V_{CCIO} must be applied at least 5 ms after the last of V_{CC} (min) and V_{CCAUX} (min) is achieved.
- All power supplies must meet standard t_{RAMP} and $t_{RAMP_VCCIOCFG}$ requirements.
- No positive leakage current may be applied to the WRIO during this period.
- No positive hot-socket leakage current may be applied to any WRIO of the same bank during this period.

Option 2: External pull-down resistors and restricted ramp rate.

- Place a 10 k Ω or smaller resistor on critical WRIO signals to maintain a static logic low level.
- The corresponding V_{CCIO} ramp rate must not exceed 4.4 V/ms.

Notes:

1. If the V_{CCIO} bank voltage is 1.2 V, only Option 2 is available.
2. Dual-function sysCONFIG pins with a default pull-up during configuration are excluded from this guidance. Refer to [sysCONFIG User Guide for Nexus Platform \(FPGA-TN-02099\)](#) for more information about the default pull mode of dual-function pins.

VREF1 and VREF2

Bank 5 and Bank 6 can support two separate VREF input voltage, VREF1, and VREF2. To assign a VREF driver, use IO_Type = VREF1_DRIVER or VREF2_DRIVER. To assign VREF to a buffer, use VREF1_LOAD or VREF2_LOAD.

sysI/O Standards Supported by I/O Bank

All banks can support multiple I/O standards under the V_{CCIO} rules discussed above. [Table 2.12](#) and [Table 2.13](#) summarize the I/O standards supported on various sides of the MachXO5-NX device.

Table 2.12. Single-Ended I/O Standards Supported on Various Sides

Standard	Top ¹	Left	Right	Bottom
LVTTTL33	Yes	Yes	Yes	—
LVC MOS33	Yes	Yes	Yes	—
LVC MOS25	Yes	Yes	Yes	—
LVC MOS18	Yes	Yes	Yes	—
LVC MOS15	Yes	Yes	Yes	—
LVC MOS12	Yes	Yes	Yes	—
LVC MOS10	Yes	Yes	Yes	—
LVC MOS18H	—	—	—	Yes
LVC MOS15H	—	—	—	Yes
LVC MOS12H	—	—	—	Yes
LVC MOS10H	—	—	—	Yes
LVC MOS10R	—	—	—	Yes
HTSL15 I	—	—	—	Yes
SSTL 15 I, II	—	—	—	Yes
SSTL 135 I, II	—	—	—	Yes
HSUL12	—	—	—	Yes
LVSTL I, II ²	—	—	—	Yes

Notes:

- For MachXO5-NX-35/T, MachXO5-NX-65/T, and MachXO5-NX-25 devices, Bank 1 can only support 3.3 V V_{CCIO}. For MachXO5-NX-55T/MachXO5-NX-100T device, Bank 0 can only support 3.3 V V_{CCIO}.
- Only available in MachXO5-NX-55T and MachXO5-NX-100T devices.

Table 2.13. Differential I/O Standards Supported on Various Sides

Standard	Top ¹	Left	Right	Bottom
LVDS	—	—	—	Yes
SUBLVDS	—	—	—	Yes
SLVS	—	—	—	Yes
SUBLVDSE	Yes	Yes	Yes	—
SUBLVDSEH	—	—	—	Yes
LVDSE	Yes	Yes	Yes	—
MIPI_D-PHY	—	—	—	Yes
HSTL15D_I	—	—	—	Yes
SSTL15D_I	—	—	—	Yes
SSTL15D_II	—	—	—	Yes
SSTL135D_I	—	—	—	Yes
SSTL135D_II	—	—	—	Yes
LVSTLD_I ²	—	—	—	Yes
LVSTLD_II ²	—	—	—	Yes
HSUL12D	—	—	—	Yes
LVTTTL33D	Yes	Yes	Yes	—
LVC MOS33D	Yes	Yes	Yes	—
LVC MOS25D	Yes	Yes	Yes	—

Notes:

- For MachXO5-NX-35/T, MachXO5-NX-65/T, and MachXO5-NX-25 devices, Bank 1 can only support 3.3 V V_{CCIO}. For MachXO5-NX-55T/MachXO5-NX-100T device, Bank 0 can only support 3.3 V V_{CCIO}.
- Only available in MachXO5-NX-55T and MachXO5-NX-100T devices.

Hot Socketing

MachXO5-NX devices have been carefully designed to ensure predictable behavior during power-up and power-down. During power-up and power-down sequences, the I/O remain in tri-state until the power supply voltage is high enough to ensure reliable operation. In addition, leakage into I/O pins is controlled within specified limits. Top/Left/Right Bank wide range I/O (excluding INITN/DONE) are fully hot socketable, while Bottom Bank are not supported.

2.12.4. sysI/O Buffer Configurations

This section describes the various sysI/O features available on the MachXO5-NX device. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for detailed information.

2.13. Analog Interface

In select speed grades, the MachXO5-NX family provides an analog interface, consisting of two Analog to Digital Convertors (ADC), three continuous time comparators and an internal junction temperature monitoring diode. See Ordering Information for more details. The two ADCs can sample the input sequentially or simultaneously.

2.13.1. Analog to Digital Converters

The Analog to Digital Convertor is a 12-bit, 1 MSPS SAR (Successive Approximation Resistor/capacitor) architecture converter. The ADC supports both continuous and single shot conversion modes.

The ADC input is selected among pre-selected GPIO input pairs, dedicated analog input pair, the internal junction temperature sensing diode and internal voltage rails. The input signal can be converted in either uni-polar or bi-polar mode.

The reference voltage is selectable between the 1.2 V internal reference generator and an external reference. The ADC can convert up to a 1.8 V input signal with a 1.8 V external reference voltage. The ADC has an auto-calibration function which calibrates the gain and offset.

2.13.2. Continuous Time Comparators

The continuous-time comparator can be used to compare a pre-selected GPIO input pairs or one dedicated comparator input pair. The output of the comparator is provided as continuous and latched data.

2.13.3. Internal Junction Temperature Monitoring Diode

On-die junction temperature can be monitored using the internal junction temperature monitoring diode. The PTAT (proportional to absolute temperature) diode voltage can be monitored by the ADC to provide a digital temperature readout. Refer to [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.

2.14. IEEE 1149.1-Compliant Boundary Scan Testability

All MachXO5-NX devices have boundary scan cells that are accessed through an IEEE 1149.1 compliant Test Access Port (TAP). This allows functional testing of the circuit board on which the device is mounted through a serial scan path that can access all critical logic nodes. Internal registers are linked internally, allowing test data to be shifted in and loaded directly onto test nodes, or test data to be captured and shifted out for verification. The test access port consists of dedicated I/O: TDI, TDO, TCK, and TMS. The test access port uses V_{CCIO2} for power supply. The test access port is supported for V_{CCIO2} = 1.8 V - 3.3 V.

For more information, refer to [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#).

2.15. Device Configuration

All MachXO5-NX devices contain two ports that can be used for device configuration. The Test Access Port (TAP) that supports bit-wide configuration, and the sysCONFIG port that supports serial, quad, and byte configuration. TAP supports both the IEEE Standard 1149.1 Boundary Scan specification and the IEEE Standard 1532 In-System Configuration specification. The JTAG_EN is the only dedicated pin supported by sysCONFIG. PPROGRAMN/INITN/DONE are enabled by default, but can be turned into GPIO. The remaining sysCONFIG pins are used as dual function pins. Refer to [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#) for more information about using the dual-use pins as general purpose I/O.

There are various ways to configure a MachXO5-NX device:

- Internal Flash Download
- JTAG
- Inter-Integrated Circuit Bus (I2C)
- Improved Inter-Integrated Circuit Bus (I3C)
- System microprocessor to drive a serial slave SPI port (SSPI mode)
- Lattice Memory Mapped Interface (LMMI), refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for condition.
- JTAG, SSPI, I2C, and I3C are supported for $V_{CCIO} = 1.8\text{ V} - 3.3\text{ V}$

On power-up, based on the voltage level (high or low) of the PROGRAMN pin, the FPGA SRAM is configured by the appropriate sysCONFIG port. If PROGRAMN pin is *low*, the FPGA is in the Slave configuration ports (Slave SPI, Slave I2C or Slave I3C) and is waiting for the correct Slave Configuration port activation key. PROGRAMN pin must be driven high within 50 ns of the end of transmission of the Slave Configuration port activation key, that is, the deassertion of SCSN. If no slave port is declared active before the PROGRAMN pin is sensed HIGH, the FPGA is in self download mode. In self download mode, the FPGA boots from on-chip flash. Once a configuration port is activated, it remains active throughout that configuration cycle. The IEEE 1149.1 port can be activated any time after power-up by enabling the JTAG_EN pin and sending the appropriate command through the TAP port.

2.15.1. Enhanced Configuration Options

MachXO5-NX devices have enhanced configuration features such as:

- Early I/O release
- Bitstream decryption
- Decompression support
- Watchdog Timer support
- Dual and Multi-boot image support

Early I/O release is a new configuration feature in which certain I/O banks are released earlier so that customer systems have minimal disruption. For more details, refer to [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#).

Watchdog Timer is a new configuration feature that helps you add a programmable timer option for timeout applications.

2.15.2. Dual-Boot and Multi-Boot Image Support

Dual-boot and multi-boot images are supported for applications requiring reliable remote updates of configuration data for the system FPGA. After the system is running with a basic configuration, a new boot image can be downloaded remotely and stored in a separate location in the configuration storage device. Any time after the update, the MachXO5-NX devices can be re-booted from this new configuration file. If there is a problem, such as corrupt data during download or incorrect version number with this new boot

image, the MachXO5-NX device can revert back to the original backup golden configuration and try again. This all can be done without power cycling the system. For more information, refer to [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#).

2.16. Single Event Upset (SEU) Support

MachXO5-NX devices are unique due to the underlying technology used to build these devices, and is much more robust and less prone to soft errors.

MachXO5-NX devices have an improved hardware implemented Soft Error Detection (SED) circuit that can be used to detect SRAM errors and thus allow the errors to be corrected. There are two layers of SED implemented in the MachXO5-NX device making it more robust and reliable.

The SED hardware in MachXO5-NX devices is part of the Configuration block. The SED module in the MachXO5-NX device is an enhanced version as compared to the SED modules implemented in other Lattice devices. The configuration data is divided into frames so that the entire FPGA can be programmed precisely with ease. The SED hardware reads data from the FPGAs configuration memory and performs Error Correcting Code (ECC) calculation on every frame of configuration data (see [Figure 2.1](#)). Once a single bit of error is detected, Soft Error Upset (SEU), a notification is generated and SED resumes operation. For single bit errors, the corrected value is rewritten to the particular frame using ECC information. If more than one-bit error is detected within one frame of configuration data, an error message is generated.

MachXO5-NX devices also have a dedicated logic to perform Cycle Redundancy Code (CRC) checks. This CRC runs in parallel for the entire bitstream along with ECC.

After the ECC is calculated on all frames of configuration data, Cyclic Redundancy Check (CRC) is calculated for the entire configuration data (bitstream). The data that is read, and the ECC and CRC calculated, do not include EBR Big SRAM and distributed RAM memory.

For further information on SED support, refer to [Soft Error Detection \(SED\)/Correction \(SEC\) User Guide for Nexus Platform \(FPGA-TN-02076\)](#).

2.17. On-Chip Oscillator

The MachXO5-NX device features two different frequency Oscillators. One is tailored for low-power operation that runs at low frequency (LFOSC). Both Oscillators are controlled with the internally generated current.

The LFOSC runs at nominal frequency of 128 kHz. The high frequency oscillator (HFOSC) runs at a nominal frequency of 450 MHz, and is divisible from 2 to 256 for output frequency between 1.758 MHz (div256) and 225 MHz (div2). The LFOSC always run, thus can be used to perform all always-on functions with the possible lowest power.

2.18. User I2C IP

The MachXO5-NX device has one I2C IP core. The core can be configured either as an I2C master or as an I2C slave. The pins for the I2C interface are pre-assigned.

The core has the option to delay either the input or the output, or both, by 50 ns nominal, using dedicated on-chip delay elements. This provides an easier interface with any external I2C components. In addition, 50 ns glitch filters are available for both SDA and SCL.

When the IP core is configured as master, it can control other devices on the I2C bus through the pre-assigned pin interface. When the core is configured as the slave, the device can provide, for example, I/O expansion to an I2C Master. The I2C core supports the following functionalities:

- Master and Slave operation

- 7-bit and 10-bit addressing
- Multi-master arbitration support
- Clock stretching
- Up to 1 MHz data transfer speed (Standard-Mode, Fast-Mode, Fast-Mode Plus)
- General Call support
- Optional receive and transmit data FIFOs with programmable sizes
- Optionally 50 ns delay on input or output data, or both
- Hard-connection and Programmable I/O connection support
- Programmable to a mode compliant with I3C requirements on legacy I2C Slave devices
- Fast-Mode and Fast-Mode Plus support
- Disabled Clock Stretching
- 50 ns SCL and SDA Glitch Filter
- Programmable 7-bit address

For further information on the User I²C, refer to [I²C Hardened IP User Guide for Nexus Platform \(FPGA-TN-02142\)](#).

2.19. User Flash Memory (UFM)

MachXO5-NX devices provide a UFM block that can be used for a variety of applications including configuration image overflow, initializing EBRs to store PROM data or, as a general purpose user Flash memory. The UFM block connects to the device core through the embedded function block LMMI interface in the MachXO5-NX devices. You can also access the UFM block through the JTAG and SPI interfaces of the device. The UFM block offers the following features:

- Non-volatile storage up to 79,872 kb
- Write access is performed page-wise; each page has 2048 bits (256 bytes)
- Auto-increment addressing
- LMMI interface

Table 2.14. UFM Size

Device/Part	UFM0 (kbit)	UFM1 (kbit)	UFM2 (kbit)	User Data (kbit)
LFMXO5-25	2,048	2,048	2,048	9,216
LFMXO5-35/T	3,584	3,584	3,584	21,504
LFMXO5-65/T	3,584	3,584	3,584	21,504
LFMXO5-55T	7,680	7,680	7,680	56,832
LFMXO5-100T	7,680	7,680	7,680	56,832

2.20. Trace ID

Each MachXO5-NX device contains a unique (per device) TraceID that can be used for tracking purposes or for IP security applications. The TraceID is 64 bits long. Eight out of 64 bits are user-programmable, the remaining 56 bits are factory-programmed. The TraceID is accessible through the SPI, I2C, or JTAG interfaces. For further information on TraceID, refer to [Using TraceID \(FPGA-TN-02084\)](#).

2.21. Pin Migration

The MachXO5-NX family is designed for pin migration in specific conditions. The MachXO5-NX-55T device can be migrated to the MachXO5-NX-100T device. The MachXO5-NX-35/T devices can be migrated to the

MachXO50NX-65/T devices. Furthermore, the architecture ensures a high success rate when performing design migration from lower density devices to higher density devices. In many cases, it is also possible to shift a lower utilization design targeted for a high-density device to a lower density device. However, the exact details of the final resource utilization impact the likelihood of success in each case. An example is that some user I/O may become No Connects in smaller devices in the same package. Refer to the MachXO5-NX Pin Migration Tables and Lattice Radiant software for specific restrictions and limitations.

2.22. Peripheral Component Interconnect Express (PCIe)

The MachXO5-NX T-suffix devices feature one hardened PCIe block on the top side of the device. The PCIe block implements all the three layers defined by the PCI Express Specification: Physical, Data Link, and Transaction, as shown in Figure 2.35. Below is a summary of the features supported by the PCIe block:

- Gen 1 (2.5 Gbps) and Gen 2 (5.0 Gbps) speed
- PCIe Express Base Specification 3.0 compliant including compliance with earlier PCI Express Specifications
- x1 or x1+x1 Bifurcation mode
- Multi-function support with up to four physical functions
- Endpoint
- Type 0 configuration registers in Endpoint mode
- Complete error-handling support
- 32-bit core data width
- Many power management features including power budgeting

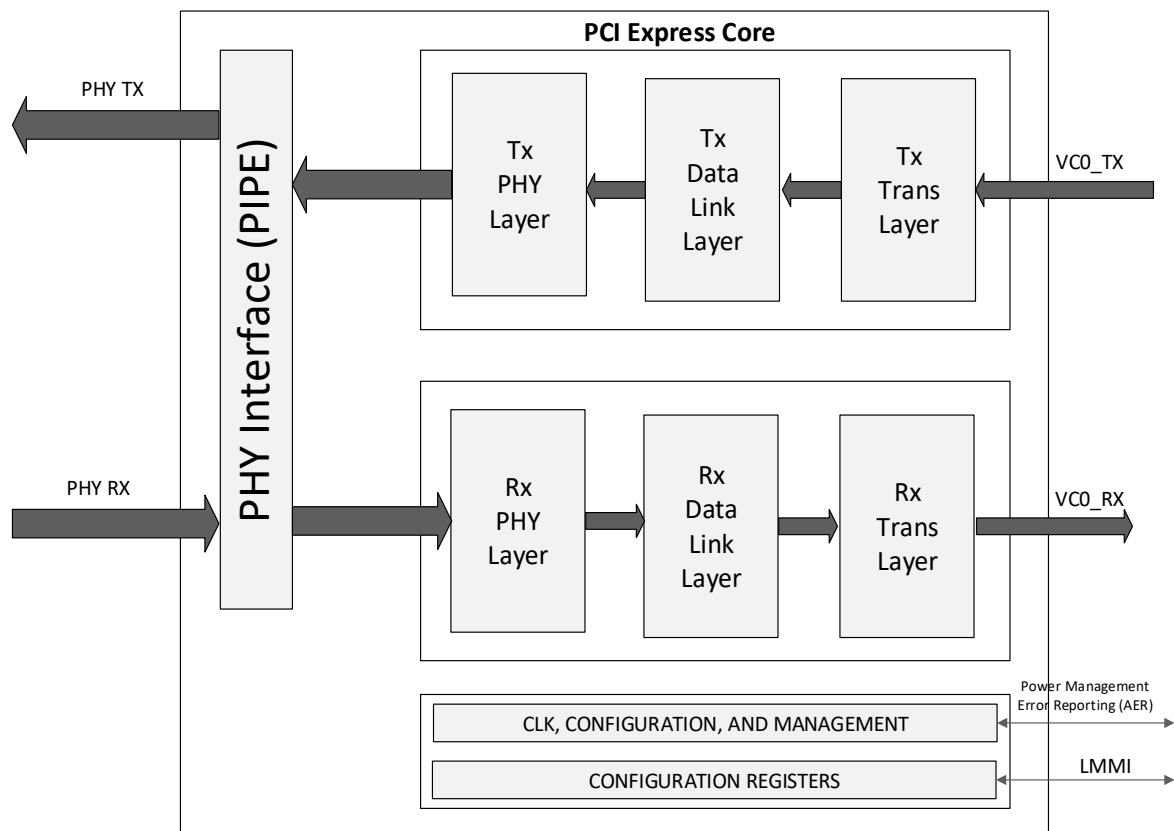


Figure 2.35. PCIe Core

The hardened PCIe block can be instantiated with the primitive PCIe through Lattice Radiant software, however, it is not recommended to directly instantiate the PCIe primitive itself. It is highly recommended to generate the PCIe Endpoint Soft IP through the Radiant IP Catalog and IP Block Wizard instead. In [Figure 2.36](#), the PCIe core is configured as Endpoint using a Soft IP wrapper that provides useful functions such as bridging support for bus interfaces and DMA applications. In addition to the standard Transaction Layer Packet (TLP) interface, the data interface can also be configured to be AXI4 or AHB-Lite as well. The PCIe hardened block also features a register interface for LMMI and User Configuration Space Register Interface (UCFG). The PCIe block has many registers that contain information about the current status of the PCIe block as well as the capability to dynamically switch PCIe settings. One easy way to access these registers is through the Reveal Controller Tool.

For more information about the PCIe soft IP, refer to the [PCIe X4 IP Core — Lattice Radiant Software \(FPGA-IPUG-02126\)](#) document.

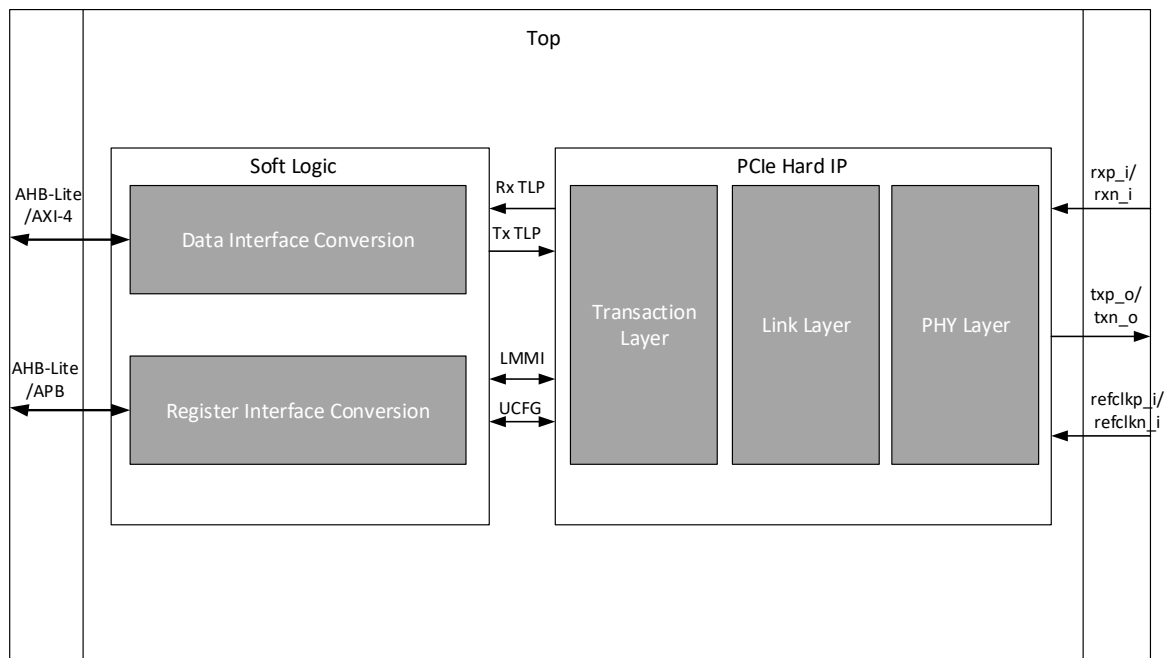


Figure 2.36. PCIe Soft IP Wrapper

2.23. Cryptographic Engine

The MachXO5-NX family of devices support several cryptographic features that helps customer secure their design. Some of the key cryptographic features include Advanced Encryption Standard (AES) and Hashing Algorithms and true random number generator (TRNG). The MachXO5-NX device also features the bitstream encryption (using AES-256) used for protecting confidential FPGA bitstream data, and the bitstream authentication (using ECDSA) maintaining the bitstream integrity and protecting the FPGA design bitstream from being copied and tampered.

The Cryptographic Engine (CRE) is the main engine (Figure 2.37) that is responsible for the bitstream encryption as well as the authentication of the MachXO5-NX devices. Once the bitstream is authenticated and the device is ready for user functions, CRE is available for you to implement various cryptographic functions in your FPGA design. To enable specific cryptographic function, CRE must be configured by setting a few registers.

CRE supports the following user-mode features:

- True Random Number generator (TRNG)
- Advanced Encryption Standard (ECB)-256 bit
- Secure Hashing Algorithm (SHA)-256 bit
- Message authentication codes (MACs) – HMAC-256
- Lattice Memory Mapped Interface (LMMI) interface to user logic
- High Speed Port (HSP) for FIFO-based streaming data transfer

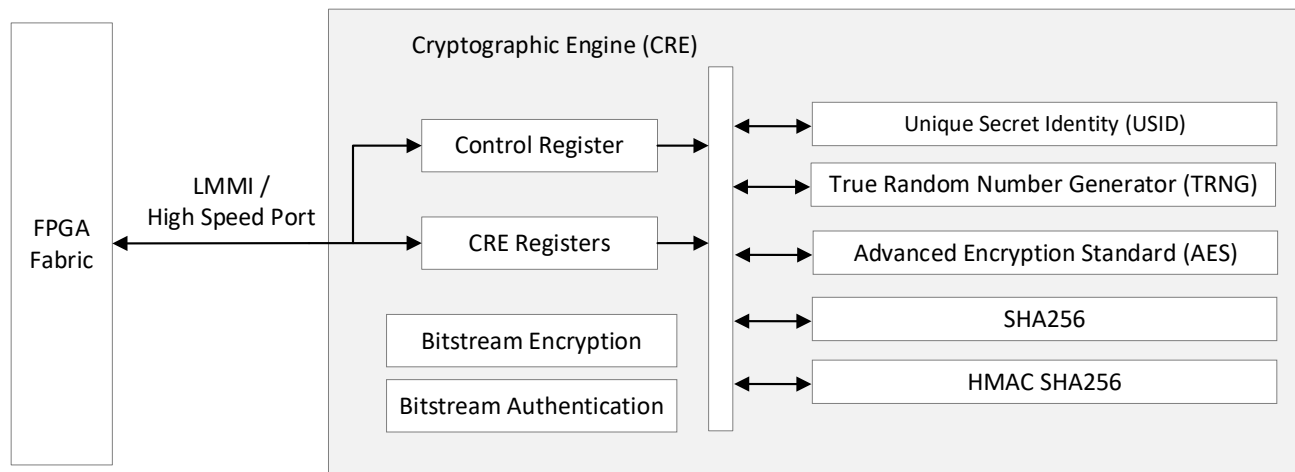


Figure 2.37. Cryptographic Engine Block Diagram

3. DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial

All specifications in this section are characterized within recommended operating conditions unless otherwise specified.

3.1. Absolute Maximum Ratings

Table 3.1. Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Unit
V_{CC}, V_{CCECLK}	Supply Voltage	-0.5	1.10	V
$V_{CCAUX}, V_{CCAUXA}, V_{CCAUXH5}, V_{CCAUXH6}$	Supply Voltage	-0.5	1.98	V
$V_{CCIO0, 1, 2, 3, 4, 7, 8, 9}$	I/O Supply Voltage	-0.5	3.63	V
$V_{CCIO5, 6}$	I/O Supply Voltage	-0.5	1.98	V
$V_{CCADC18}$	ADC Block 1.8 V Supply Voltage	-0.5	1.98	V
$V_{CCADC18}$	ADC Block 1.8 V Supply Voltage	-0.5	1.98	V
—	Input or I/O Voltage Applied, Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9	-0.5	3.63	V
—	Input or I/O Voltage Applied, Bank 5, Bank 6	-0.5	1.98	V
T_A	Storage Temperature (Ambient)	-65	150	°C
T_J	Junction Temperature	—	+125	°C

Notes:

- Stress above those listed under the *Absolute Maximum Ratings* may cause permanent damage to the device. Functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.
- Compliance with the Lattice [Thermal Management](#) document is required.
- All voltages referenced to GND.
- All V_{CCAUX} should be connected on PCB.

3.2. Recommended Operating Conditions^{1, 2, 3}

Table 3.2. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V_{CC}, V_{CCECLK}	Core Supply Voltage	$V_{CC} = 1.0$	0.95	1.00	1.05	V
V_{CCAUX}	Auxiliary Supply Voltage	Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9	1.746	1.80	1.89	V
$V_{CCAUXH5/6}$	Auxiliary Supply Voltage	Bank 5, Bank 6	1.746	1.80	1.89	V
V_{CCAUXA}	Auxiliary Supply Voltage for core logic	—	1.746	1.80	1.89	V
V_{CCIO}	I/O Driver Supply Voltage	$V_{CCIO} = 3.3$ V, Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9	3.135	3.30	3.465	V
		$V_{CCIO} = 2.5$ V, Bank 0, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9	2.375	2.50	2.625	V
		$V_{CCIO} = 1.8$ V, All Banks except Bank 1	1.71	1.80	1.89	V
		$V_{CCIO} = 1.5$ V, All Banks except Bank 1 ⁴	1.425	1.50	1.575	V

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
		V _{CCIO} = 1.35 V, All Banks except Bank 1 ⁴ (For DDR3L Only)	1.2825	1.35	1.4175	V
		V _{CCIO} = 1.2 V, All Banks except Bank 1 ⁴	1.14	1.20	1.26	V
		V _{CCIO} = 1.0 V, Bank 5, Bank 6	0.95	1.00	1.05	V
ADC External Power Supplies						
V _{CCADC18}	ADC 1.8 V Power Supply	—	1.71	1.80	1.89	V
Operating Temperature						
t _{JCOM}	Junction Temperature, Commercial Operation	—	0	—	85	°C
t _{JIND}	Junction Temperature, Industrial Operation	—	−40	—	100	°C

Notes:

- For correct operation, all supplies must be held in their valid operation voltage range.
- All supplies with same voltage should be from the same voltage source. Proper isolation filters are needed to properly isolate noise from each other.
- Common supply rails must be tied together.
- JTAG, SSPI, I2C, and I3C (Bank 2) ports are supported for $V_{CCIO} = 1.8\text{ V}$ to 3.3 V .

3.3. Power Supply Ramp Rates

Table 3.3. Power Supply Ramp Rates

Symbol	Parameter	Min	Typ	Max	Unit
t_{RAMP}	Power Supply ramp rates for all supplies ^{1,2,3,4}	0.1	—	50	V/ms
$t_{RAMP_VCCIOCFG}$	Power Supply ramp rates for V_{CCIO01} ^{1,2,3,5}	0.65	—	50	V/ms

Notes:

- Assumes monotonic ramp rates.
- All supplies need to be in the operating range as defined in [Recommended Operating Conditions](#) when the device has completed configuration and entering into User Mode. Supplies that are not in the operating range needs to be adjusted to faster ramp rate, or you have to delay configuration or wake up.
- When WRIO must remain at a logic low level during power rail ramp-up, and V_{CCIO} is not sequenced last, the corresponding V_{CCIO} t_{RAMP} must be 4.4 V/ms or less. Refer to the [sysI/O Considerations](#) section for more information.
- Includes V_{CCIO1} when the rail achieves its minimum Recommended Operating Condition prior to V_{CC} ramp-up.
- Required when V_{CCIO1} is powered up simultaneously with or after V_{CC}

3.4. Power up Sequence

Power-On-Reset (POR) puts the MachXO5-NX device into a reset state. There is no power up sequence required for the MachXO5-NX device.

In applications where the WRIO must remain at a logic low level during power rail ramp-up and before POR deactivation, refer to the [sysI/O Considerations](#) section.

Note: Dual-function sysCONFIG pins with configuration phase pull-up resistors will transition *high* during this period and are excluded from this guidance. Refer to the sysCONFIG Pins section of the [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#) for the complete list of dual-function sysCONFIG pins.

Table 3.4. Power-On Reset

Symbol	Parameter	Min	Typ	Max	Unit	
V _{PORUP}	Power-On-Reset ramp-up trip point (Monitoring V _{CC} , V _{CCAUX} , V _{CCI01} , and V _{CCI02})	V _{CC}	0.73	—	0.83	V
		V _{CCAUX}	1.34	—	1.62	V
		V _{CCI01} , V _{CCI02}	0.89	—	1.05	V

Symbol	Parameter		Min	Typ	Max	Unit
V _{PORDN}	Power-On-Reset ramp-down trip point (Monitoring V _{CC} and V _{CCAUX})	V _{CC}	0.51	—	0.81	V
		V _{CCAUX}	1.38	—	1.59	V

3.5. On-Chip Programmable Termination

The MachXO5-NX devices support a variety of programmable on-chip terminations options, including:

- Dynamically switchable Single-Ended Termination with programmable resistor values of 40 Ω , 50 Ω , 60 Ω , or 75 Ω .
- Common mode termination of 100 Ω for differential inputs.

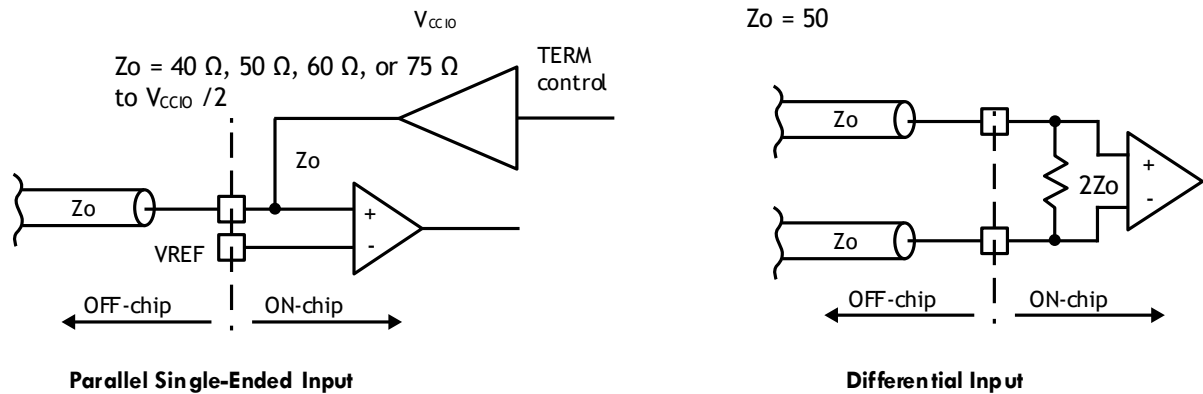


Figure 3.1. On-Chip Termination

See Table 3.5 for termination options for input modes.

Table 3.5. On-Chip Termination Options for Input Modes

IO_TYPE	Differential Termination Resistor ^{1, 2}	Terminate to $V_{CCIO}/2$ ^{1, 2}
subLVDS	100, OFF	OFF
SLVS	100, OFF	OFF
MIPI_DPHY	100	OFF
HSTL15D_I	100, OFF	OFF
SSTL15D_I	100, OFF	OFF
SSTL135D_I	100, OFF	OFF
HSUL12D	100, OFF	OFF
LVC MOS15H	OFF	OFF
LVC MOS12H	OFF	OFF
LVC MOS10H	OFF	OFF
LVC MOS18H	OFF	OFF, 40, 50, 60, 75
HSTL15_I	OFF	50
SSTL15_I	OFF	OFF, 40, 50, 60, 75
SSTL135_I	OFF	OFF, 40, 50, 60, 75
HSUL12	OFF	OFF, 40, 50, 60, 75
LVSTL_I	OFF, OFF	40, 48, 60, 80, 120
LVSTL_II	OFF, OFF	80, 120

Notes:

1. TERMINATE to $V_{CCIO}/2$ (Single-Ended) and DIFFERENTIAL TERMINATION RESISTOR when turned on can only have one setting per bank. Only bottom bank have this feature.

2. Use of TERMINATE to VCCIO/2 and DIFFERENTIAL TERMINATION RESISTOR are mutually exclusive in an I/O bank. On-chip termination tolerance –10%/+60%.

Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for on-chip termination usage and value ranges.

3.6. Hot Socketing Specifications

Table 3.6. Hot Socketing Specifications for GPIO

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{DK}	Input or I/O Leakage Current for Wide Range I/O (excluding INITN/DONE)	$0 < V_{IN} < V_{IH}(\text{max})$ $0 < V_{CC} < V_{CC}(\text{max})$ $0 < V_{CCIO} < V_{CCIO}(\text{max})$ $0 < V_{CCAUX} < V_{CCAUX}(\text{max})$	–1.5	—	1.5	mA

Notes:

- I_{DK} is additive to I_{PU} , I_{PD} , or I_{BH} .
- Hot socket specification defines when the hot socketed device's junction temperature is at 85 °C or below. When the hot socketed device's junction temperature is above 85 °C, the I_{DK} current can exceed the above spec.
- Going beyond the hot socketing ranges specified here will cause exponentially higher Leakage currents and potential reliability issues. A total of 64mA per 8 I/O should not be exceeded.

3.7. Programming/Erase Specifications

Table 3.7. Programming/Erase Specifications

Symbol	Parameter	Min	Max.	Units
N_{PROGCYC}	Flash Programming cycles per $t_{\text{RETENTION}}$	—	10,000	Cycles
	Flash Write/Erase cycles	—	100,000	
$t_{\text{RETENTION}}$	Data retention at 100 °C junction temperature	20	—	Years
	Data retention at 85 °C junction temperature	>20	—	

Note:

A Write/Erase cycle is defined as any number of writes over time followed by one erase cycle.

3.8. ESD Performance

Refer to the MachXO5-NX Product Family Qualification Summary for complete qualification data, including ESD performance.

3.9. DC Electrical Characteristics

Table 3.8. DC Electrical Characteristics – Wide Range (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IL}, I_{IH}^1	Input or I/O Leakage current (Commercial/Industrial)	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	10	μA
I_{IH}^2	Input or I/O Leakage current	$V_{CCIO} \leq V_{IN} \leq V_{IH} (max)$	—	—	100	μA
I_{PU}	I/O Weak Pull-up Resistor Current	$0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$	-30	—	-150	μA
I_{PD}	I/O Weak Pull-down Resistor Current	$V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$	30	—	150	μA
I_{BHLS}	Bus Hold Low Sustaining Current	$V_{IN} = V_{IL} (max)$	30	—	—	μA
I_{BHHS}	Bus Hold High Sustaining Current	$V_{IN} = 0.7 \times V_{CCIO}$	-30	—	—	μA
I_{BHLO}	Bus hold low Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	150	μA
I_{BHHO}	Bus hold high Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	-150	μA
V_{BHT}	Bus Hold Trip Points	—	$V_{IL} (max)$	—	$V_{IH} (min)$	V

Notes:

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.
- The input leakage current I_{IH} is the worst case input leakage per GPIO when the pad signal is high and also higher than the bank V_{CCIO} . This is considered a mixed mode input.

Table 3.9. DC Electrical Characteristics – High Speed (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IL}, I_{IH}^1	Input or I/O Leakage	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	10	μA
I_{PU}	I/O Weak Pull-up Resistor Current	$0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$	-30	—	-150	μA
I_{PD}	I/O Weak Pull-down Resistor Current	$V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$	30	—	150	μA
I_{BHLS}	Bus Hold Low Sustaining Current	$V_{IN} = V_{IL} (max)$	30	—	—	μA
I_{BHHS}	Bus Hold High Sustaining Current	$V_{IN} = 0.7 \times V_{CCIO}$	-30	—	—	μA
I_{BHLO}	Bus hold low Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	150	μA
I_{BHHO}	Bus hold high Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	-150	μA
V_{BHT}	Bus Hold Trip Points	—	$V_{IL} (max)$	—	$V_{IH} (min)$	V

Note:

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.

Table 3.10. Capacitors – Wide Range (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_1^1	I/O Capacitance	$V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf
C_2^1	Dedicated Input Capacitance	$V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf

Note:

- $T_A 25^\circ C, f = 1.0 \text{ MHz}$.

Table 3.11. Capacitors – High Performance (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_1^1	I/O Capacitance	$V_{CCIO} = 1.8\text{ V}, 1.5\text{ V}, 1.2\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCIO} + 0.2\text{ V}$	—	6	—	pf
C_2^1	Dedicated Input Capacitance	$V_{CCIO} = 1.8\text{ V}, 1.5\text{ V}, 1.2\text{ V}, V_{CC} = \text{typ.}, V_{IO} = 0 \text{ to } V_{CCIO} + 0.2\text{ V}$	—	6	—	pf

Note:

1. $T_A = 25^\circ\text{C}$, $f = 1.0\text{ MHz}$.

Table 3.12. Single Ended Input Hysteresis – Wide Range (Over Recommended Operating Conditions)

IO_TYPE	V_{CCIO}	TYP Hysteresis
LVC MOS33	3.3 V	250 mV
LVC MOS25	3.3 V	200 mV
	2.5 V	250 mV
LVC MOS18	1.8 V	180 mV
LVC MOS15	1.5 V	50 mV
LVC MOS12	1.2 V	0
LVC MOS10	1.2 V	0

Table 3.13. Single Ended Input Hysteresis – High Performance (Over Recommended Operating Conditions)

IO_TYPE	V_{CCIO}	TYP Hysteresis
LVC MOS18H	1.8 V	180 mV
LVC MOS15H	1.8 V	50 mV
	1.5 V	150 mV
LVC MOS12H	1.2 V	0
LVC MOS10H	1.0 V	0
MIPI-LP-RX	1.2 V	>25 mV

3.10. Supply Currents

For estimating and calculating current, use Power Calculator in Lattice Design Software.

This operating and peak current is design dependent, and can be calculated in Lattice Design Software. Some blocks can be placed into low current standby modes. Refer to [Power Management and Calculation for Certus-NX, CertusPro-NX, and MachXO5-NX Devices \(FPGA-TN-02257\)](#).

3.11. sysI/O Recommended Operating Conditions

Table 3.14. sysI/O Recommended Operating Conditions

Standard	Support Banks	V _{CCIO} (Input)	V _{CCIO} (Output)
		Typ.	Typ.
Single-Ended			
LVC MOS33	0, 1, 2, 3, 4, 7, 8, 9	3.3	3.3
LV TTL33	0, 1, 2, 3, 4, 7, 8, 9	3.3	3.3
LVC MOS25 ^{1, 2}	0, 2, 3, 4, 7, 8, 9	2.5, 3.3	2.5
LVC MOS18 ^{1, 2}	0, 2, 3, 4, 7, 8, 9	1.2, 1.5, 1.8, 2.5, 3.3	1.8
LVC MOS18H	5, 6	1.8	1.8
LVC MOS15 ^{1, 2}	0, 2, 3, 4, 7, 8, 9	1.2, 1.5, 1.8, 2.5, 3.3	1.5
LVC MOS15H ¹	5, 6	1.5, 1.8	1.5
LVC MOS12 ^{1, 2}	0, 2, 3, 4, 7, 8, 9	1.2, 1.5, 1.8, 2.5, 3.3	1.2
LVC MOS12H ¹	5, 6	1.2, 1.35 ⁷ , 1.5, 1.8	1.2
LVC MOS10 ¹	0, 2, 3, 4, 7, 8, 9	1.2, 1.5, 1.8, 2.5, 3.3	—
LVC MOS10H ¹	5, 6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8	1.0
LVC MOS10R ¹	5, 6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8	—
SSTL135_I, SSTL135_II ³	5, 6	1.35 ⁷	1.35
SSTL15_I, SSTL15_II ³	5, 6	1.5 ⁸	1.5 ⁸
HSTL15_I ³	5, 6	1.5 ⁸	1.5 ⁸
HSUL12 ³	5, 6	1.2	1.2
MIPI D-PHY LP Input ⁶	5, 6	1.2	1.2
Differential			
LVDS	5, 6	1.2, 1.35, 1.5, 1.8	1.8
LVDSE ⁵	0, 2, 3, 4, 7, 8, 9	—	2.5
subLVDS	5, 6	1.2, 1.35, 1.5, 1.8	—
subLVDSE ⁵	0, 2, 3, 4, 7, 8, 9	—	1.8
subLVDSEH ⁵	5, 6	—	1.8
SLVS ⁶	5, 6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8 ⁴	1.2, 1.35 ⁷ , 1.5, 1.8 ⁴
MIPI D-PHY ⁶	5, 6	1.2	1.2
LVC MOS33D ⁵	0, 1, 2, 3, 4, 7, 8, 9	—	3.3
LV TTL33D ⁵	0, 1, 2, 3, 4, 7, 8, 9	—	3.3
LVC MOS25D ⁵	0, 2, 3, 4, 7, 8, 9	—	2.5
SSTL135D_I, SSTL135D_II ⁵	5, 6	—	1.35 ⁷
SSTL15D_I, SSTL15D_II ⁵	5, 6	—	1.5
HSTL15D_I ⁵	5, 6	—	1.5
HSUL12D ⁵	5, 6	—	1.2

Notes:

- Single-ended input can mix into I/O Banks with V_{CCIO} different from the standard requires due to some of these input standards use internal supply voltage source (V_{CC}, V_{CCAUX}) to power the input buffer, which makes them to be independent of V_{CCIO} voltage. For more details, please refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#). The following is a brief guideline to follow:
 - Weak pull-up on the I/O must be set to OFF.
 - Bank 5 and Bank 6 I/O can only mix into banks with V_{CCIO} higher than the pin standard, due to clamping diode on the pin in these banks. Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9 does not have this restriction.
 - LVC MOS25 uses V_{CCIO} supply on input buffer in Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9. It can be supported with V_{CCIO} = 3.3 V to meet the V_{IH} and V_{IL} requirements, but there is additional current drawn on V_{CCIO}. Hysteresis has to be disabled when using 3.3 V supply voltage.
 - LVC MOS15 uses V_{CCIO} supply on input buffer in Bank 5 and Bank 6. It can be supported with V_{CCIO} = 1.8 V to meet the V_{IH} and V_{IL} requirements, but there is additional current drawn on V_{CCIO}.
- Single-ended LVC MOS inputs can mixed into I/O Banks with different V_{CCIO}, providing weak pull-up is not used.

- For additional information on Mixed I/O in Bank V_{CCIO} , refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#).
- These inputs use differential input comparator in Bank 5 and Bank 6. The differential input comparator uses V_{CCAUXH} power supply. These inputs require the V_{REF} pin to provide the reference voltage in the Bank. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
 - All differential inputs use differential input comparator in Bank 5 and Bank 6. The differential input comparator uses V_{CCAUXH} power supply. There is no differential input signaling supported in Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9.
 - These outputs are emulating differential output pair with single-ended output drivers with true and complement outputs driving on each of the corresponding true and complement output pair pins. The common mode voltage, V_{CM} , is $\frac{1}{2} \times V_{CCIO}$. Refer to [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
 - Soft MIPI D-PHY HS using sysI/O is supported with SLVS input and output that can be placed in banks with V_{CCIO} voltage shown in SLVS. D-PHY with HS and LP modes supported needs to be placed in banks with V_{CCIO} voltage = 1.2 V. Soft MIPI D-PHY LP input and output using sysI/O are supported with LVCMOS12.
 - $V_{CCIO} = 1.35$ V is only supported in Bank 5 and Bank 6, for use with DDR3L interface in the bank. These Input and Output standards can fit into the same bank with the $V_{CCIO} = 1.35$ V.
 - LVCMOS15 input uses V_{CCIO} supply voltage. If V_{CCIO} is 1.8 V, the DC levels for LVCMOS15 are still met, but there could be increase in input buffer current.

3.12. sysI/O Single-Ended DC Electrical Characteristics³

Table 3.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions)

Input/Output Standard	V_{IL}^1		V_{IH}^1		V_{OL} Max (V)	V_{OH} Min ² (V)	I_{OL} (mA)	I_{OH} (mA)
	Min (V)	Max (V)	Min (V)	Max (V)				
LVTTL33 LVCMOS33	—	0.8	2.0	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	4, 8, 12, "50RS" ³	-4, -8, -12, "50RS" ³
	—	0.8	2.0	3.465 ⁵	0.4	2.4	2	-2
	—	0.8	2.0	3.465 ⁵	0.49	$V_{CCIO} - 0.58$	16	-16
LVCMOS25	—	0.7	1.7	3.465 ⁵	0.4	$V_{CCIO} - 0.45$	2, 4, 8, 10, "50RS" ³	-2, -4, -8, -10, "50RS" ³
LVCMOS18	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.45$	2, 4, 8, "50RS" ³	-2, -4, -8, "50RS" ³
LVCMOS15	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	2, 4	-2, -4
LVCMOS12	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	2, 4	-2, -4
LVCMOS10	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	No O/P Support			

Notes:

- V_{CCIO} for input level refers to the supply rail level associated with a given input standard.
- V_{CCIO} for the output levels refer to the V_{CCIO} of the CertusPro-NX device.
- Selecting "50RS" in driver strength is to select 50 Ω series impedance driver.
- For electro-migration, the combined DC current sourced or sunk by I/O pads between two consecutive V_{CCIO} or GND pad connections, or between the last V_{CCIO} or GND in an I/O bank and the end of an I/O bank, as shown in the Logic Signal Connections table (also shown as I/O grouping) shall not exceed a maximum of $n \times 8$ mA. n is the number of I/O pads between the two consecutive bank V_{CCIO} or GND connections or between the last V_{CCIO} and GND in a bank and the end of a bank. I/O Grouping can be found in the Data Sheet Pin Summary Tables, which can also be generated from the Lattice Radiant software.
- If the input clamp is OFF, V_{IH} (Max) in Banks 0, 1, 2, 3, 4, 7, 8, and 9 can go up to 3.465 V. Otherwise, the input voltage cannot be higher than $V_{CCIO} + 0.3$ V.

Table 3.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions)³

Input/Output Standard	V_{IL}^1		V_{IH}^1		V_{OL} Max (V)	V_{OH} Min ² (V)	I_{OL} (mA)	I_{OH} (mA)
	Min (V)	Max (V)	Min (V)	Max (V)				
LVCMOS18H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.45$	2, 4, 8, 12	-2, -4, -8, -12
	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.53$	"50RS" ³	"50RS" ³
LVCMOS15H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.4$	2, 4, 8	-2, -4, -8
LVCMOS12H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.4$	2, 4, 8	-2, -4, -8
LVCMOS10H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	$0.27 \times V_{CCIO}$	$0.64 \times V_{CCIO}$	2	-2
	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	$0.27 \times V_{CCIO}$	$0.75 \times V_{CCIO}$	4	-4
SSTL15_I	—	$V_{REF} - 0.10$	$V_{REF} + 0.1$	$V_{CCIO} + 0.3$	0.30	$V_{CCIO} - 0.30$	7.5	-7.5
SSTL15_II	—	$V_{REF} - 0.10$	$V_{REF} + 0.1$	$V_{CCIO} + 0.3$	0.30	$V_{CCIO} - 0.30$	8.8	-8.8
HSTL15_I	—	$V_{REF} - 0.10$	$V_{REF} + 0.16$	$V_{CCIO} + 0.3$	0.40	$V_{CCIO} - 0.40$	8	-8
SSTL135_I	—	$V_{REF} - 0.09$	$V_{REF} + 0.09$	$V_{CCIO} + 0.3$	0.27	$V_{CCIO} - 0.27$	6.75	-6.75
SSTL135_II	—	$V_{REF} - 0.09$	$V_{REF} + 0.09$	$V_{CCIO} + 0.3$	0.27	$V_{CCIO} - 0.27$	8	-8
LVCMOS10R	—	$V_{REF} - 0.10$	$V_{REF} + 0.10$	$V_{CCIO} + 0.3$	—	—	—	—
HSUL12	—	$V_{REF} - 0.10$	$V_{REF} + 0.10$	$V_{CCIO} + 0.3$	0.3	$V_{CCIO} - 0.3$	8.0, 7.5, 6.25, 5	-8.0, -7.5, -6.25, -5

Notes:

1. V_{CCIO} for input level refers to the supply rail level associated with a given input standard or the upstream driver V_{CCIO} rail levels.
2. V_{CCIO} for the output levels refer to the V_{CCIO} of the MachXO5-NX device.
3. Select "50RS" in driver strength is selecting the 50Ω series impedance driver.
4. For electro-migration, the combined DC current sourced or sunk by I/O pads between two consecutive V_{CCIO} or GND pad connections, or between the last V_{CCIO} or GND in an I/O bank and the end of an I/O bank, as shown in the Logic Signal Connections table (also shown as I/O grouping) shall not exceed a maximum of $n \times 8$ mA. n is the number of I/O pads between the two consecutive bank V_{CCIO} or GND connections or between the last V_{CCIO} and GND in a bank and the end of a bank. I/O Grouping can be found in the Data Sheet Pin Summary Tables, which can also be generated from the Lattice Radiant software.

Table 3.17. I/O Resistance Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
50RS	Output Drive Resistance when 50RS Drive Strength Selected	$V_{CCIO} = 1.8$ V, 2.5 V, or 3.3 V	—	50	—	Ω
R_{DIFF}	Input Differential Termination Resistance	Bank 5 and Bank 6 for I/O selected to be differential	—	100	—	Ω
SE Input Termination	Input Single Ended Termination Resistance	Bank 5 and Bank 6 for I/O selected to be Single Ended	36	40	64	Ω
			46	50	80	
			56	60	96	
			65	75	120	

Table 3.18. VIN Maximum Overshoot/Undershoot Allowance – Wide Range^{1,2}

AC Voltage Overshoot	% of UI at –40 °C to 100 °C	AC Voltage Undershoot	% of UI at –40 °C to 100 °C
$V_{CCIO} + 0.4$	100.0%	–0.4	100.0%
$V_{CCIO} + 0.5$	100.0%	–0.5	44.2%
$V_{CCIO} + 0.6$	94.0%	–0.6	10.1%
$V_{CCIO} + 0.7$	21.0%	–0.7	1.3%
$V_{CCIO} + 0.8$	10.2%	–0.8	0.3%
$V_{CCIO} + 0.9$	2.5%	–0.9	0.1%

Notes:

1. The peak overshoot or undershoot voltage and the duration above $V_{CCIO} + 0.2$ V or below GND – 0.2 V must not exceed the values in this table.
2. For UI less than 20 μ s.

Table 3.19. VIN Maximum Overshoot/Undershoot Allowance – High Performance^{1,2}

AC Voltage Overshoot	% of UI at –40 °C to 100 °C	AC Voltage Undershoot	% of UI at –40 °C to 100 °C
$V_{CCIO} + 0.5$	100.0%	–0.5	100.0%
$V_{CCIO} + 0.6$	47.3%	–0.6	47.3%
$V_{CCIO} + 0.7$	10.9%	–0.7	10.9%
$V_{CCIO} + 0.8$	2.7%	–0.8	2.7%
$V_{CCIO} + 0.9$	0.7%	–0.9	0.7%

Notes:

1. The peak overshoot or undershoot voltage and the duration above $V_{CCIO} + 0.2$ V or below GND – 0.2 V must not exceed the values in this table.
2. For UI less than 20 μ s.

3.13. sysI/O Differential DC Electrical Characteristics

3.13.1. LVDS

LVDS input buffer on MachXO5-NX is powered by $V_{CCAUX} = 1.8$ V, and protected by the bank V_{CCIO} . Therefore, the LVDS input voltage cannot exceed the bank V_{CCIO} voltage. LVDS output buffer is powered by the Bank V_{CCIO} at 1.8 V.

LVDS can only be supported in Bank 5 and Bank 6. LVDS25 output can be emulated with LVDS25E in Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9. This is described in [LVDS25E \(Output Only\)](#) section.

Table 3.20. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions)¹

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{INP}, V_{INM}	Input Voltage	—	0	—	1.60 ³	V
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	0.05	—	1.55 ²	V
V_{THD}	Differential Input Threshold	Difference between the two Inputs	± 100	—	—	mV
I_{IN}	Input Current	Power On or Power Off	—	—	± 10	μ A
V_{OH}	Output High Voltage for V_{OP} or V_{OM}	$R_T = 100 \Omega$	—	1.425	1.60	V
V_{OL}	Output Low Voltage for V_{OP} or V_{OM}	$R_T = 100 \Omega$	0.9	1.075	—	V
V_{OD}	Output Voltage Differential	$(V_{OP} - V_{OM}), R_T = 100 \Omega$	250	350	450	mV
ΔV_{OD}	Change in V_{OD} Between High and Low	—	—	—	50	mV
V_{OCM}	Output Common Mode Voltage	$(V_{OP} + V_{OM})/2, R_T = 100 \Omega$	1.125	1.25	1.375	V
ΔV_{OCM}	Change in $V_{OCM}, V_{OCM(MAX)} - V_{OCM(MIN)}$	—	—	—	50	mV
I_{SAB}	Output Short Circuit Current	$V_{OD} = 0$ V Driver outputs shorted to each other	—	—	12	mA

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
ΔV_{OS}	Change in V_{OS} between H and L	—	—	—	50	mV

Notes:

1. LVDS input or output are supported in Bank 5, and Bank 6. LVDS input uses V_{CCAUX} on the differential input comparator, and can be located in any V_{CCIO} voltage bank. LVDS output uses V_{CCIO} on the differential output driver, and can only be located in bank with $V_{CCIO} = 1.8$ V.
2. V_{ICM} is depending on V_{ID} , input differential voltage, so the voltage on pin cannot exceed $V_{INP/INM(min/max)}$ requirements. $V_{ICM(min)} = V_{INP/INM(min)} + \frac{1}{2} V_{ID}$, $V_{ICM(max)} = V_{INP/INM(max)} - \frac{1}{2} V_{ID}$. Values in the table is based on minimum V_{ID} of +/- 100 mV.
3. V_{INP} and $V_{INM(max)}$ must be less than or equal to V_{CCIO} in all cases.

3.13.2. LVDS25E (Output Only)

Three sides of the MachXO5-NX devices, Top, Left and Right, support LVDS25 outputs with emulated complementary LVC MOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in Figure 3.2 is one possible solution for point-to-point signals.

Table 3.21. LVDS25E DC Conditions

Parameter	Description	Typical	Unit
V_{CCIO}	Output Driver Supply ($\pm 5\%$)	2.50	V
Z_{OUT}	Driver Impedance	20	Ω
R_S	Driver Series Resistor ($\pm 1\%$)	158	Ω
R_P	Driver Parallel Resistor ($\pm 1\%$)	140	Ω
R_T	Receiver Termination ($\pm 1\%$)	100	Ω
V_{OH}	Output High Voltage	1.43	V
V_{OL}	Output Low Voltage	1.07	V
V_{OD}	Output Differential Voltage	0.35	V
V_{CM}	Output Common Mode Voltage	1.25	V
Z_{BACK}	Back Impedance	100.5	Ω
I_{DC}	DC Output Current	6.03	mA

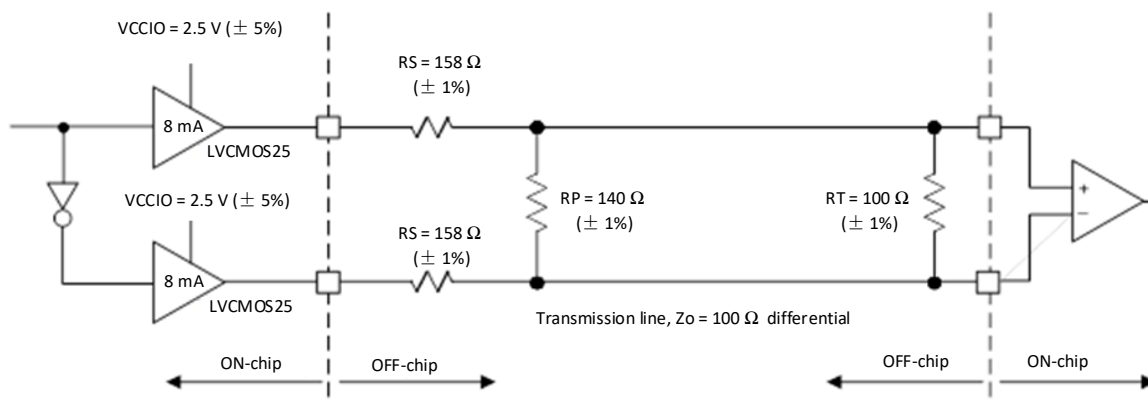


Figure 3.2. LVDS25E Output Termination Example

3.13.3. SubLVDS (Input Only)

SubLVDS is a reduced-voltage form of LVDS signaling, very similar to LVDS. It is a standard used in many camera types of applications. Similar to LVDS, the MachXO5-NX devices can support the subLVDS input signaling with the same LVDS input buffer. The output for subLVDS is implemented in subLVDS E/subLVDS EH with a pair of LVC MOS18 output drivers. See SubLVDS E/SubLVDS EH (Output Only) section.

Table 3.22. SubLVDS Input DC Electrical Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{ID}	Input Differential Threshold Voltage	Over V_{ICM} range	70	150	200	mV
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	0.4	0.9	1.4 ¹	V

Note:

1. $V_{ICM} + \frac{1}{2}V_{ID}$ cannot exceed the bank V_{CCIO} in all cases.

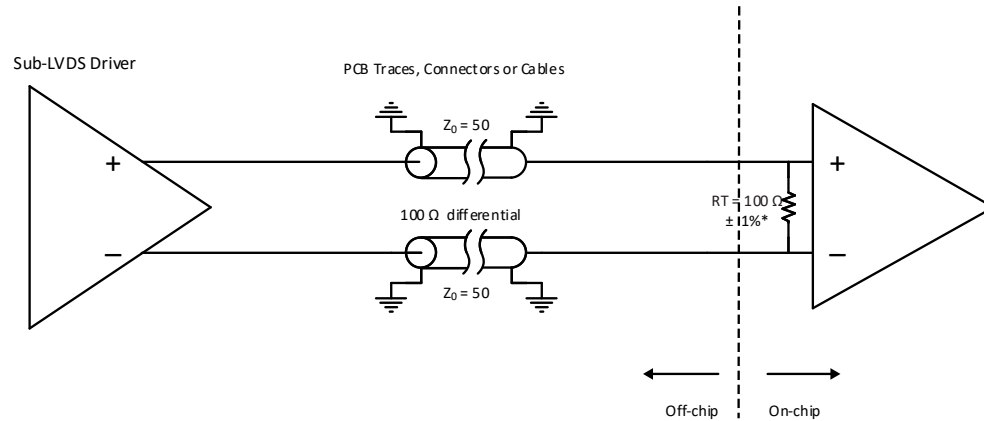


Figure 3.3. SubLVDS Input Interface

3.13.4. SubLVDS/ SubLVDS/ SubLVDS (Output Only)

SubLVDS output uses a pair of LVC MOS18 drivers with True and Complement outputs. The V_{CCIO} of the bank used for subLVDS or subLVDS/ SubLVDS (Output Only) needs to be powered by 1.8 V. SubLVDS is for Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9; and subLVDS/ SubLVDS (Output Only) is for Bank 5 and Bank 6.

Performance of the subLVDS/ SubLVDS (Output Only) driver is limited to the performance of LVC MOS18.

Table 3.23. SubLVDS Output DC Electrical Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{OD}	Output Differential Voltage Swing	—	—	150	—	mV
V_{OCM}	Output Common Mode Voltage	Half the sum of the two Outputs	—	0.9	—	V

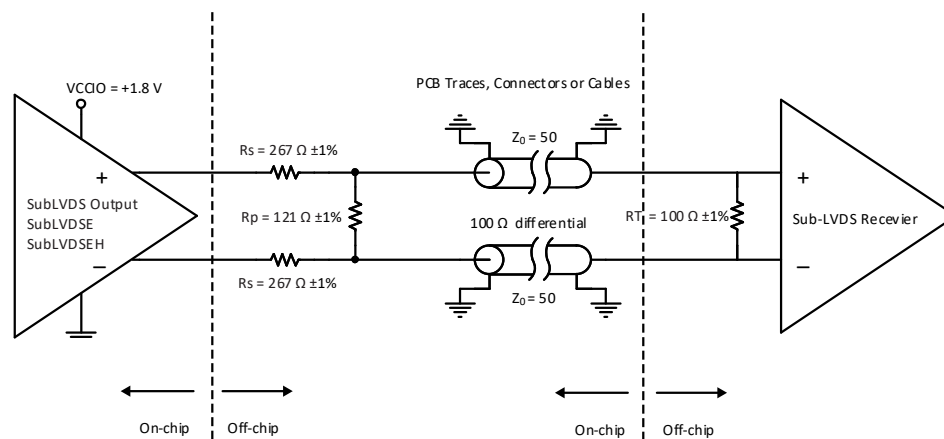


Figure 3.4. SubLVDS Output Interface

3.13.5. SLVS

Scalable Low-Voltage Signaling (SLVS) is based on a point-to-point signaling method defined in the JEDEC JESD8-13 (SLVS-400) standard. This standard evolved from the traditional LVDS standard with smaller voltage swings and a lower common-mode voltage. The 200 mV (400 mV p-p) SLVS swing contributes to a reduction in power.

The MachXO5-NX devices receive SLVS differential input with the LVDS input buffer. This LVDS input buffer is designed to cover wide input common mode range that can meet the SLVS input standard specified by the JEDEC standard.

Table 3.24. SLVS Input DC Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{ID}	Input Differential Threshold Voltage	Over V_{ICM} range	70	—	—	mV
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	70	200	330	mV

The SLVS output on the MachXO5-NX device is supported with the LVDS drivers found in Bank 5 and Bank 6. The LVDS driver on the MachXO5-NX device is a current controlled driver. It can be configured as LVDS driver, or configured with the 100 Ω differential termination with center-tap set to V_{OCM} at 200 mV. This means the differential output driver can be placed into bank with $V_{CCIO} = 1.2$ V, 1.5 V, or 1.8 V, even if it is powered by V_{CCIO} .

Table 3.25. SLVS Output DC Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{CCIO}	Bank V_{CCIO}	—	–5%	1.2, 1.5, 1.8	+ 5%	V
V_{OD}	Output Differential Voltage Swing	—	140	200	270	mV
V_{OCM}	Output Common Mode Voltage	Half the sum of the two Outputs	150	200	250	mV
Z_{OS}	Single-Ended Output Impedance	—	37.5	50	62.5	Ω

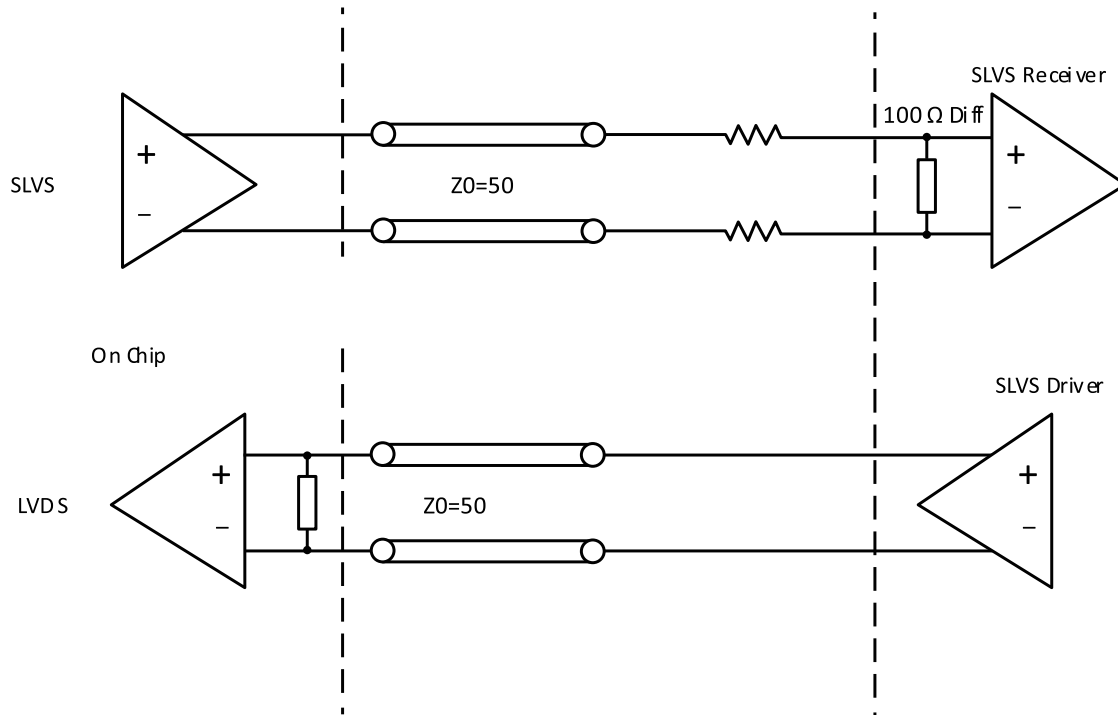


Figure 3.5. SLVS Interface

3.13.6. Soft MIPI D-PHY

When Soft D-PHY is implemented inside the FPGA logic, the I/O interface needs to use sysI/O buffers to connect to external D-PHY pins.

The MachXO5-NX sysI/O provides support of SLVS, as described in [SLVS](#) section, plus the LVCMOS12 input/output buffers together to support the High Speed (HS) and Low Power (LP) mode as defined in MIPI Alliance Specification for D-PHY.

To support MIPI D-PHY with SLVS (LVDS) and LVCMOS12, the bank V_{CCIO} cannot be set to 1.5 V or 1.8 V. It has to connect to 1.2 V, or 1.1 V.

All other DC parameters are the same as those listed in [SLVS](#) section. DC parameters for the LP driver and receiver are the same as those listed in LVCMOS12.

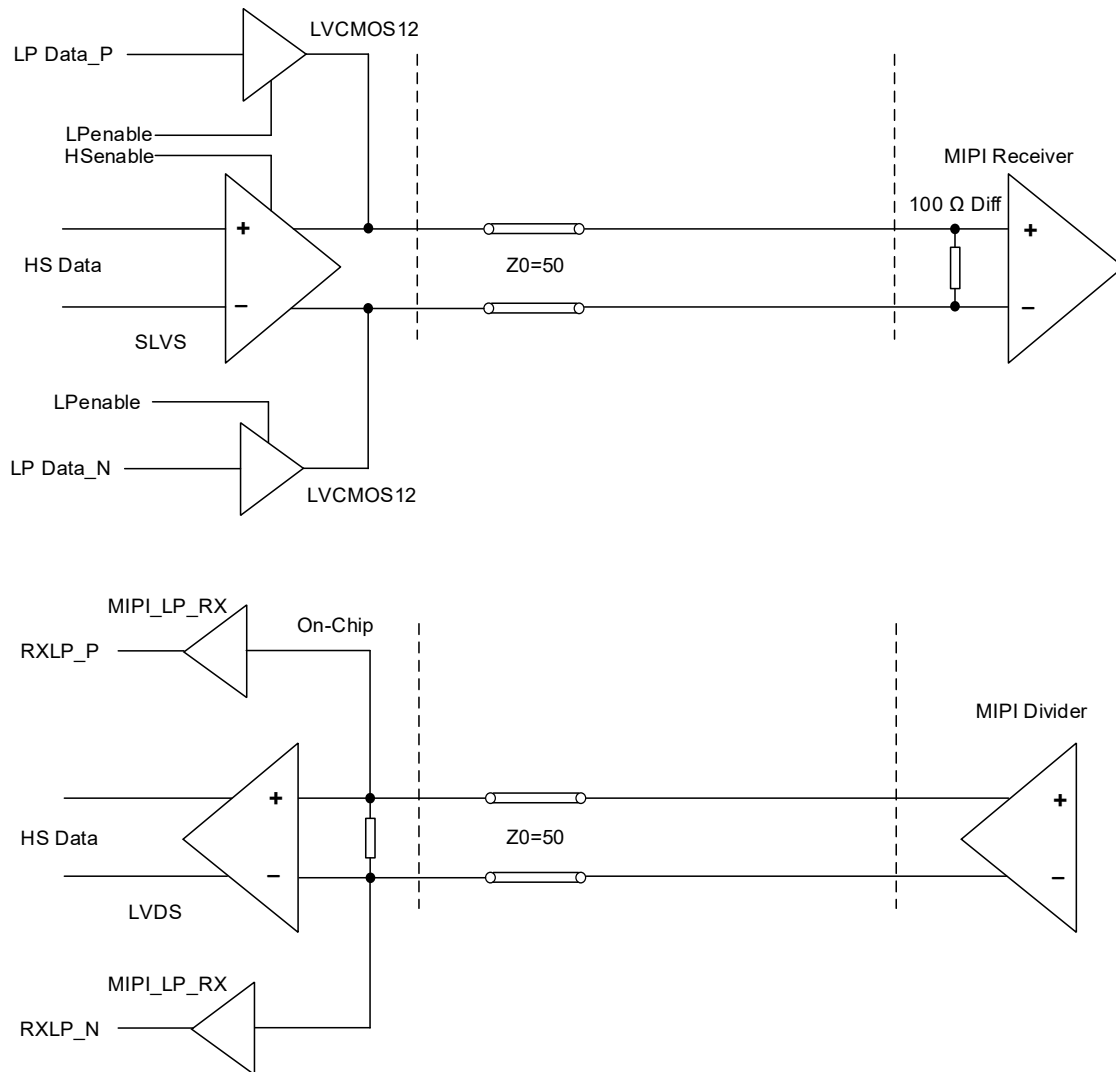


Figure 3.6. MIPI Interface

Table 3.26. Soft D-PHY Input Timing and Levels

Symbol	Description	Conditions	Min	Typ	Max	Unit
High Speed (Differential) Input DC Specifications						
$V_{CMRX(DC)}$	Common-mode Voltage in High Speed Mode	—	70	—	330	mV
V_{IDTH}	Differential Input HIGH Threshold	—	70	—	—	mV
V_{IDTL}	Differential Input LOW Threshold	—	—	—	–70	mV
V_{IHHS}	Input HIGH Voltage (for HS mode)	—	—	—	460	mV
V_{ILHS}	Input LOW Voltage	—	–40	—	—	mV
$V_{TERM-EN}$	Single-ended voltage for HS Termination Enable ⁴	—	—	—	450	mV
Z_{ID}	Differential Input Impedance	—	80	100	125	Ω
High Speed (Differential) Input AC Specifications						
$\Delta V_{CMRX(HF)}^1$	Common-mode Interference (>450 MHz)	—	—	—	100	mV
$\Delta V_{CMRX(LF)}^{2, 3}$	Common-mode Interference (50 MHz – 450 MHz)	—	–50	—	50	mV
C_{CM}	Common-mode Termination	—			60	pF
Low Power (Single-Ended) Input DC Specifications						
V_{IH}	Low Power Mode Input HIGH Voltage	—	740	—	—	mV
V_{IL}	Low Power Mode Input LOW Voltage	—	—	—	480	mV
V_{IL-ULP}	Ultra Low Power Input LOW Voltage	—	—	—	300	mV
V_{HYST}	Low Power Mode Input Hysteresis	—	25	—	—	mV
E_{SPIKE}	Input Pulse Rejection	—	—	—	300	V·ps
T_{MIN-RX}	Minimum Pulse Width Response	—	20	—	—	ns
V_{INT}	Peak Interference Amplitude	—	—	—	200	mV
f_{INT}	Interference Frequency	—	450	—	—	MHz

Notes:

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential R_{TERM} is enabled when both D_P and D_N are below this voltage.

Table 3.27. Soft D-PHY Output Timing and Levels

Symbol	Description	Conditions	Min	Typ	Max	Unit
High Speed (Differential) Output DC Specifications						
V _{CMTX}	Common-mode Voltage in High Speed Mode	—	150	200	250	mV
ΔV _{CMTX(1,0)}	V _{CMTX} Mismatch Between Differential HIGH and LOW	—	—	—	7	mV
V _{OD}	Output Differential Voltage	D-PHY-P – D-PHY-N	140	200	270	mV
ΔV _{OD}	V _{OD} Mismatch Between Differential HIGH and LOW	—	—	—	25	mV
V _{OHHS}	Single-Ended Output HIGH Voltage	—	—	—	410	mV
Z _{OS}	Single Ended Output Impedance	—	37.5	50	80	Ω
ΔZ _{OS}	Z _{OS} mismatch	—	—	—	20	%
High Speed (Differential) Output AC Specifications						
ΔV _{CMTX(LF)}	Common-Mode Variation, 50 MHz–450 MHz	—	—	—	25	mV _{RMS}
ΔV _{CMTX(HF)}	Common-Mode Variation, above 450 MHz	—	—	—	15	mV _{RMS}
t _R	Output 20%–80% Rise Time Output 80%–20% Fall Time	0.08 Gbps ≤ t _R ≤ 1.00 Gbps	—	—	0.30	UI
		1.00 Gbps < t _R ≤ 1.25 Gbps	—	—	0.434	UI
t _F	Output Data Valid After CLK Output	0.08 Gbps ≤ t _F ≤ 1.00 Gbps	—	—	0.30	UI
		1.00 Gbps < t _F ≤ 1.25 Gbps	—	—	0.419	UI
Low Power (Single-Ended) Output DC Specifications						
V _{OH}	Low Power Mode Output HIGH Voltage	0.08 Gbps – 1.25 Gbps	1.07	1.2	1.3	V
V _{OL}	Low Power Mode Input LOW Voltage	—	–50	—	50	mV
Z _{OLP}	Output Impedance in Low Power Mode	—	110	—	—	Ω
Low Power (Single-Ended) Output AC Specifications						
t _{RLP}	15%–85% Rise Time	—	—	—	25	ns
t _{FLP}	85%–15% Fall Time	—	—	—	25	ns
t _{REOT}	HS – LP Mode Rise and Fall Time, 30%–85%	—	—	—	35	ns
T _{LP-PULSE-TX}	Pulse Width of the LP Exclusive-OR Clock	First LP XOR Clock Pulse after STOP State or Last Pulse before STOP State	40	—	—	ns
		All Other Pulses	20	—	—	ns
T _{LP-PER-TX}	Period of the LP Exclusive-OR Clock	—	90	—	—	ns
C _{LOAD}	Load Capacitance	—	0	—	70	pF

Table 3.28. Soft D-PHY Clock Signal Specification

Symbol	Description	Conditions	Min	Typ	Max	Unit
Clock Signal Specification						
UI Instantaneous	U_{INST}	—	—	—	12.5	ns
UI Variation	ΔUI	—	–10%	—	10%	UI
		—	–5%	—	5%	UI

Table 3.29. Soft D-PHY Data-Clock Timing Specifications

Symbol	Description	Conditions	Min	Typ	Max	Unit
Data-Clock Timing Specifications						
$T_{\text{SKEW}[\text{TX}]}$	Data to Clock Skew	$0.08 \text{ Gbps} \leq T_{\text{SKEW}[\text{TX}]} \leq 1.00 \text{ Gbps}$	-0.15	—	0.15	UI _{INST}
		$1.00 \text{ Gbps} < T_{\text{SKEW}[\text{TX}]} \leq 1.25 \text{ Gbps}$	-0.20	—	0.20	UI _{INST}
$T_{\text{SKEW}[\text{TLIS}]}$	Data to Clock Skew	$0.08 \text{ Gbps} \leq T_{\text{SKEW}[\text{TLIS}]} \leq 1.00 \text{ Gbps}$	-0.20	—	0.20	UI _{INST}
		$1.00 \text{ Gbps} < T_{\text{SKEW}[\text{TLIS}]} \leq 1.25 \text{ Gbps}$	-0.10	—	0.10	UI _{INST}
$T_{\text{SETUP}[\text{RX}]}$	Input Data Setup Before CLK	$0.08 \text{ Gbps} \leq T_{\text{SETUP}[\text{RX}]} \leq 1.00 \text{ Gbps}$	0.15	—	—	UI
		$1.00 \text{ Gbps} < T_{\text{SETUP}[\text{RX}]} \leq 1.25 \text{ Gbps}$	0.20	—	—	UI
$T_{\text{HOLD}[\text{RX}]}$	Input Data Hold After CLK	$0.08 \text{ Gbps} \leq T_{\text{HOLD}[\text{RX}]} \leq 1.00 \text{ Gbps}$	0.15	—	—	UI
		$1.00 \text{ Gbps} < T_{\text{HOLD}[\text{RX}]} \leq 1.25 \text{ Gbps}$	0.20	—	—	UI

3.13.7. Differential HSTL15D (Output Only)

Differential HSTL outputs are implemented as a pair of complementary single-ended HSTL outputs.

3.13.8. Differential SSTL135D, SSTL15D (Output Only)

Differential SSTL is used for differential clock in DDR3/DDR3L memory interface. All differential SSTL outputs are implemented as a pair of complementary single-ended SSTL outputs. All allowable single-ended output classes (class I and class II) are supported.

3.13.9. Differential HSUL12D (Output Only)

Differential HSUL is used for differential clock in LPDDR2/LPDDR3 memory interface. All differential HSUL outputs are implemented as a pair of complementary single-ended HSUL12 outputs. All allowable single-ended drive strengths are supported.

3.13.10. Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only)

Differential LVCMOS and LVTTTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output drive strengths are supported.

3.14. Maximum sysI/O Buffer Speed

Over recommended operating conditions.

Table 3.30. Maximum I/O Buffer Speed^{1, 2, 3, 4, 7}

Buffer	Description	Banks	Max	Unit
Maximum sysI/O Input Frequency				
Single-Ended				
LVC MOS33	LVC MOS33, V _{CCIO} = 3.3 V	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVTTL33	LVTTL33, V _{CCIO} = 3.3 V	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS25	LVC MOS25, V _{CCIO} = 2.5 V	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS18 ⁵	LVC MOS18, V _{CCIO} = 1.8 V	0, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS18H	LVC MOS18, V _{CCIO} = 1.8 V	5, 6	200	MHz
LVC MOS15 ⁵	LVC MOS15, V _{CCIO} = 1.5 V	0, 2, 3, 4, 7, 8, 9	100	MHz
LVC MOS15H ⁵	LVC MOS15, V _{CCIO} = 1.5 V	5, 6	150	MHz
LVC MOS12 ⁵	LVC MOS12, V _{CCIO} = 1.2 V	0, 2, 3, 4, 7, 8, 9	50	MHz
LVC MOS12H ⁵	LVC MOS12, V _{CCIO} = 1.2 V	5, 6	100	MHz
LVC MOS10 ⁵	LVC MOS 1.0, V _{CCIO} = 1.2 V	0, 2, 3, 4, 7, 8, 9	50	MHz
LVC MOS10H ⁵	LVC MOS 1.0, V _{CCIO} = 1.0 V	5, 6	50	MHz
LVC MOS10R	LVC MOS 1.0, V _{CCIO} independent	5, 6	50	MHz
SSTL15_I, SSTL15_II	SSTL_15, V _{CCIO} = 1.5 V	5, 6	1066	Mbps
SSTL135_I, SSTL135_II	SSTL_135, V _{CCIO} = 1.35 V	5, 6	1066	Mbps
HSUL12	HSUL_12, V _{CCIO} = 1.2 V	5, 6	1066	Mbps
HSTL15	HSTL15, V _{CCIO} = 1.5 V	5, 6	250	Mbps
MIPI D-PHY (LP Mode)	MIPI, Low Power Mode, V _{CCIO} = 1.2 V	5, 6	10	Mbps
Differential⁸				
LVDS	LVDS, V _{CCIO} independent	5, 6	1250	Mbps
subLVDS	subLVDS, V _{CCIO} independent	5, 6	1250	Mbps
SLVS	SLVS similar to MIPI HS, V _{CCIO} independent	5, 6	1250	Mbps
MIPI D-PHY (HS Mode)	MIPI, High Speed Mode, V _{CCIO} = 1.2 V	5, 6	1250	Mbps
SSTL15D	Differential SSTL15, V _{CCIO} independent	5, 6	1066	Mbps
SSTL135D	Differential SSTL135, V _{CCIO} independent	5, 6	1066	Mbps
HSUL12D	Differential HSUL12, V _{CCIO} independent	5, 6	1066	Mbps
HSTL15D	Differential HSTL15, V _{CCIO} independent	5, 6	250	Mbps
Maximum sysI/O Output Frequency				
Single-Ended				
LVC MOS33 (all drive strengths)	LVC MOS33, V _{CCIO} = 3.3 V	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS33 (RS50)	LVC MOS33, V _{CCIO} = 3.3 V, R _{SERIES} = 50 Ω	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVTTL33 (all drive strengths)	LVTTL33, V _{CCIO} = 3.3 V	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVTTL33 (RS50)	LVTTL33, V _{CCIO} = 3.3 V, R _{SERIES} = 50 Ω	0, 1, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS25 (all drive strengths)	LVC MOS25, V _{CCIO} = 2.5 V	0, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS25 (RS50)	LVC MOS25, V _{CCIO} = 2.5 V, R _{SERIES} = 50 Ω	0, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS18 (all drive strengths)	LVC MOS18, V _{CCIO} = 1.8 V	0, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS18 (RS50)	LVC MOS18, V _{CCIO} = 1.8 V, R _{SERIES} = 50 Ω	0, 2, 3, 4, 7, 8, 9	200	MHz
LVC MOS18H (all drive strengths)	LVC MOS18, V _{CCIO} = 1.8 V	5, 6	200	MHz
LVC MOS18H (RS50)	LVC MOS18, V _{CCIO} = 1.8 V, R _{SERIES} = 50 Ω	5, 6	200	MHz
LVC MOS15 (all drive strengths)	LVC MOS15, V _{CCIO} = 1.5 V	0, 2, 3, 4, 7, 8, 9	100	MHz
LVC MOS15H (all drive strengths)	LVC MOS15, V _{CCIO} = 1.5 V	5, 6	150	MHz
LVC MOS12 (all drive strengths)	LVC MOS12, V _{CCIO} = 1.2 V	0, 2, 3, 4, 7, 8, 9	50	MHz

Buffer	Description	Banks	Max	Unit
LVC MOS12H (all drive strengths)	LVC MOS12, $V_{CCIO} = 1.2\text{ V}$	5, 6	100	MHz
LVC MOS10H (all drive strengths)	LVC MOS12, $V_{CCIO} = 1.2\text{ V}$	5, 6	50	MHz
SSTL15_I, SSTL15_II	SSTL_15, $V_{CCIO} = 1.5\text{ V}$	5, 6	1066	Mbps
SSTL135_I, SSTL135_II	SSTL_135, $V_{CCIO} = 1.35\text{ V}$	5, 6	1066	Mbps
HSUL12 (all drive strengths)	HSUL_12, $V_{CCIO} = 1.2\text{ V}$	5, 6	1066	Mbps
HSTL15	HSTL15, $V_{CCIO} = 1.5\text{ V}$	5, 6	250	Mbps
MIPI D-PHY (LP Mode)	MIPI, Low Power Mode, $V_{CCIO} = 1.2\text{ V}$	5, 6	10	Mbps
Differential⁸				
LVDS	LVDS, $V_{CCIO} = 1.8\text{ V}$	5, 6	1250	Mbps
LVDS25E ⁶	LVDS25, Emulated, $V_{CCIO} = 2.5\text{ V}$	0, 2, 3, 4, 7, 8, 9	400	Mbps
SubLVDS E ⁶	subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$	0, 2, 3, 4, 7, 8, 9	400	Mbps
SubLVDS EH ⁶	subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$	5, 6	800	Mbps
SLVS	SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$	5, 6	1250	Mbps
MIPI D-PHY (HS Mode)	MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$	5, 6	1250	Mbps
SSTL15D	Differential SSTL15, $V_{CCIO} = 1.5\text{ V}$	5, 6	1066	Mbps
SSTL135D	Differential SSTL135, $V_{CCIO} = 1.35\text{ V}$	5, 6	1066	Mbps
HSUL12D	Differential HSUL12, $V_{CCIO} = 1.2\text{ V}$	5, 6	1066	Mbps
HSTL15D	Differential HSTL15, $V_{CCIO} = 1.5\text{ V}$	5, 6	250	Mbps

Notes:

- Maximum I/O speed is the maximum switching rate of the I/O operating within the guidelines of the defining standard. The actual interface speed performance using the I/O also depends on other factors, such as internal and external timing.
- These numbers are characterized but not test on every device.
- Performance is specified in MHz, as defined in clock rate when the sysI/O is used as pin. For data rate performance, this can be converted to Mbps, which equals to 2 times the clock rate.
- LVC MOS and LV TTL are measured with load specified in [Table 3.46](#).
- These LVC MOS inputs can be placed in different V_{CCIO} voltage. Performance may vary. Please refer to Lattice Design Software
- These emulated outputs performance is based on externally properly terminated as described in [LVDS25E \(Output Only\)](#) and [SubLVDS E/SubLVDS EH \(Output Only\)](#).
- All speeds are measured with fast slew.
- For maximum differential I/O performance, only Differential I/O should be placed in the bottom I/O banks. If this is not possible, the following will impact on maximum performance:
 - If Fast Slew Rate LVC MOS I/O are used, they should be limited to no more than nine I/O (adjacent), four I/O (same bank), 55 I/O (left/right banks) to keep degradation below 50%.
 - If non-Differential I/O (SLOW SLEW) are placed on the bottom but not within the same bank as differential I/O, then the maximum Differential performance is degraded to 70% of original when 21 aggressors are toggling.
 - If non-Differential I/O (SLOW SLEW) are placed within the same bank as Differential I/O then the maximum performance is degraded to 50% of original when 16 aggressor are toggling.
 - No performance impact if MIPI LP and MIPI HS are in the same bank.
 - If Differential RX/TX I/O are both placed within the same bank then the maximum performance is degraded to 90%.
 - For DDR3/3L, LPDDR2/3/4 separate DQ/DQS groups from Address/Commands/CLK groups into separate banks.

3.15. Typical Building Block Function Performance

These building block functions can be generated using Lattice Design Software Tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

Table 3.31. Pin-to-Pin Performance

Function	Typ. @ V _{CC} = 1.0 V	Unit
16-bit Decoder (I/O configured with LVCMOS18, Top, Left and Right Banks)	5.5	ns
16-bit Decoder (I/O configured with HSTL15_I, Bottom Banks)	5.1	ns
16:1 Mux (I/O configured with LVCMOS18, Top, Left and Right Banks)	6	ns
16:1 Mux (I/O configured with HSTL15_I, Bottom Banks)	6.1	ns

Note: These functions are generated using Lattice Radiant Design Software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

Table 3.32. Register-to-Register Performance^{1, 3, 4}

Function	Typ. @ V _{CC} = 1.0 V	Unit
Basic Functions		
16-bit Adder	500 ²	MHz
32-bit Adder	496	MHz
16-bit Counter	402	MHz
32-bit Counter	371	MHz
Embedded Memory Functions		
512 × 36 Single Port RAM, with Output Register	500 ²	MHz
1024 × 18 True-Dual Port RAM using same clock, with EBR Output Registers	500 ²	MHz
1024 × 18 True-Dual Port RAM using asynchronous clocks, with EBR Output Registers	500 ²	MHz
Large Memory Functions		
32 k × 32 Single Port RAM, with Output Register	375 ²	MHz
32 k × 32 Single Port RAM with ECC, with Output Register	350 ²	MHz
32 k × 32 True-Dual Port RAM using same clock, with Output Registers	200	MHz
Distributed Memory Functions		
16 × 4 Single Port RAM (One PFU)	500 ²	MHz
16 × 2 Pseudo-Dual Port RAM (One PFU)	500 ²	MHz
16 × 4 Pseudo-Dual Port (Two PFUs)	500 ²	MHz
DSP Functions		
9 × 9 Multiplier with Input Output Registers	376	MHz
18 × 18 Multiplier with Input/Output Registers	287	MHz
36 × 36 Multiplier with Input/Output Registers	200	MHz
MAC 18 × 18 with Input/Output Registers	203	MHz
MAC 18 × 18 with Input/Pipelined/Output Registers	287	MHz
MAC 36 × 36 with Input/Output Registers	119	MHz
MAC 36 × 36 with Input/Pipelined/Output Registers	155	MHz

Notes:

1. The Clock port is configured with LVDS I/O type. Performance Grade: 9_High-Performance_1.0V.
2. Limited by the Minimum Pulse Width of the component
3. These functions are generated using Lattice Radiant Design Software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
4. For the Pipelined designs, the number of pipeline stages used are 2.

3.16. LMMI

Table 3.33 summarizes the performance of the LMMI interface with supported IPs. Additional timing requirement and constraint can be identified through the Lattice Radiance design tools.

Table 3.33. LMMI F_{MAX} Summary

IP	F _{MAX} (MHz)
CDR0	73
CDR1	70
CRE	54
I2C	38
PLL_ULC	59
PLL_LRC	37

3.17. Derating Timing Tables

Logic timing provided in the following sections of this data sheet and the Lattice Radiant design tools are worst case numbers in the operating range. Actual delays at nominal temperature and voltage for best case process, can be much better than the values given in the tables. The Lattice Radiant design tool can provide logic timing numbers at a particular temperature and voltage.

3.18. External Switching Characteristics

Over recommended commercial operating conditions.

Table 3.34. External Switching Characteristics (V_{CC} = 1.0 V)

Parameter	Description	−9		−8		−7		Unit
		Min	Max	Min	Max	Min	Max	
Clocks								
Primary Clock								
f _{MAX_PRI}	Frequency for Primary Clock	—	400	—	325.2	—	276	MHz
t _{W_PRI}	Clock Pulse Width for Primary Clock	1.125	—	1.384	—	1.630	—	ns
t _{SKEW_PRI} ⁶	Primary Clock Skew Within a Device	—	450	—	554	—	653	ps
Edge Clock								
f _{MAX_EDGE}	Frequency for Edge Clock Tree	—	800	—	650.4	—	551.7	MHz
t _{W_EDGE}	Clock Pulse Width for Edge Clock	0.537	—	0.661	—	0.779	—	ns
t _{SKEW_EDGE} ⁶	Edge Clock Skew Within a Device	—	120	—	148	—	174	ps
Generic SDR Input								
General I/O Pin Parameters Using Dedicated Primary Clock Input without PLL								
t _{CO}	Clock to Output – PIO Output Register	—	8.36	—	8.53	—	8.67	ns
t _{SU}	Clock to Data Setup – PIO Input Register	0.00	—	0.00	—	0.00	—	ns
t _{H(LTR)}	Clock to Data Hold – PIO Input Register	3.73	—	3.83	—	3.93	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
$t_{H(Bottom)}$	Clock to Data Hold – PIO Input Register	4.65	—	4.75	—	4.84	—	ns
t_{SU_DEL}	Clock to Data Setup – PIO Input Register with Data Input Delay	1.84	—	1.84	—	1.84	—	ns
$t_{H_DEL(LTR)}$	Clock to Data Hold – PIO Input Register with Data Input Delay	0.22	—	0.22	—	0.22	—	ns
$t_{H_DEL(Bottom)}$	Clock to Data Hold – PIO Input Register with Data Input Delay	1.77	—	1.77	—	1.77	—	ns
General I/O Pin Parameters Using Dedicated Primary Clock Input with PLL								
t_{COPLL}	Clock to Output – PIO Output Register	—	4.55	—	4.67	—	5.51	ns
$t_{SUPLL(LTR \text{ except Bank1})}$	Clock to Data Setup – PIO Input Register	1.71	—	1.71	—	1.71	—	ns
$t_{SUPLL(Bank1)}$	Clock to Data Setup – PIO Input Register	2.33	—	2.33	—	2.33	—	ns
$t_{SUPLL(Bottom)}$	Clock to Data Setup – PIO Input Register	1.33	—	1.33	—	1.33	—	ns
$t_{HPLL(LTR)}$	Clock to Data Hold – PIO Input Register	0.98	—	1.21	—	1.42	—	ns
$t_{HPLL(Bottom)}$	Clock to Data Hold – PIO Input Register	1.87	—	1.87	—	1.87	—	ns
$t_{SU_DELPLL(LTR \text{ except Bank1})}$	Clock to Data Setup – PIO Input Register with Data Input Delay	4.87	—	4.87	—	4.87	—	ns
$t_{SU_DELPLL(Bank1)}$	Clock to Data Setup – PIO Input Register with Data Input Delay	5.77	—	5.77	—	5.77	—	ns
$t_{SU_DELPLL(Bottom)}$	Clock to Data Setup – PIO Input Register with Data Input Delay	4.74	—	4.74	—	4.74	—	ns
t_{H_DELPLL}	Clock to Data Hold – PIO Input Register with Data Input Delay	0.00	—	0.00	—	0.00	—	ns
Generic DDR Input/Output								
Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input (Left, Top, and Right Banks) – Figure 3.7 and Figure 3.9								
t_{SU_GDDR1}	Input Data Setup Before CLK	0.917	—	0.917	—	0.917	—	ns
		0.275	—	0.275	—	0.275	—	UI
t_{HO_GDDR1}	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns
		0.917	—	0.917	—	0.917	—	ns
t_{DVB_GDDR1}	Output Data Valid After CLK Output	1.217	—	1.113	—	1.014	—	ns
		–0.45	—	–0.554	—	–0.653	—	ns + ½UI
t_{DQVA_GDDR1}	Output Data Valid After CLK Output	1.217	—	1.113	—	1.014	—	ns
		–0.45	—	–0.554	—	–0.653	—	ns + ½UI
f_{DATA_GDDR1}	Input/Output Data Rate	—	300	—	300	—	300	Mbps
f_{MAX_GDDR1}	Frequency of PCLK	—	150	—	150	—	150	MHz
½ UI	Half of Data Bit Time, or 90 degree	1.667	—	1.667	—	1.667	—	ns
Output TX to Input RX Margin per Edge		0.3	—	0.197	—	0.097	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input (Left, Top, and Right Banks) – Figure 3.8 and Figure 3.10								
tDVA_GDDR1	Input Data Valid After CLK	—	–0.917	—	–0.917	—	–0.917	ns + ½UI
		—	0.75	—	0.75	—	0.75	ns
		—	0.225	—	0.225	—	0.225	UI
tDVE_GDDR1	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns + ½UI
		2.583	—	2.583	—	2.583	—	ns
		0.775	—	0.775	—	0.775	—	UI
tDIA_GDDR1	Output Data Invalid After CLK Output	—	0.45	—	0.554	—	0.653	ns
tDIB_GDDR1	Output Data Invalid Before CLK Output	—	0.45	—	0.554	—	0.653	ns
fDATA_GDDR1	Input/Output Data Rate	—	300	—	300	—	300	Mbps
fMAX_GDDR1	Frequency for PCLK	—	150	—	150	—	150	MHz
½ UI	Half of Data Bit Time, or 90 degree	1.667	—	1.667	—	1.667	—	ns
Output TX to Input RX Margin per Edge		0.3	—	0.197	—	0.098	—	ns
Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input (Bottom Banks) – Figure 3.7 and Figure 3.9								
tSU_GDDR1	Input Data Setup Before CLK	0.55	—	0.55	—	0.648	—	ns
		0.275	—	0.275	—	0.275	—	UI
tHO_GDDR1	Input Data Hold After CLK	0.55	—	0.55	—	0.648	—	ns
tDVB_GDDR1	Output Data Valid After CLK Output	0.7	—	0.631	—	0.744	—	ns
		–0.300	—	–0.369	—	–0.435	—	ns + ½UI
tDQVA_GDDR1	Output Data Valid After CLK Output	0.7	—	0.631	—	0.744	—	ns
		–0.300	—	–0.369	—	–0.435	—	ns + ½UI
fDATA_GDDR1	Input/Output Data Rate	—	500	—	500	—	424	Mbps
fMAX_GDDR1	Frequency of PCLK	—	250	—	250	—	212	MHz
½ UI	Half of Data Bit Time, or 90 degree	—	—	1	—	1.179	—	ns
Output TX to Input RX Margin per Edge		0.15	—	0.081	—	0.095	—	ns
Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input (Bottom Banks) – Figure 3.8 and Figure 3.10								
tDVA_GDDR1	Input Data Valid After CLK	—	–0.55	—	–0.550	—	–0.648	ns + ½UI
		—	0.45	—	0.45	—	0.53	ns
		—	0.225	—	0.225	—	0.225	UI
tDVE_GDDR1	Input Data Hold After CLK	0.55	—	0.55	—	0.648	—	ns + ½UI
		1.55	—	1.55	—	1.827	—	ns
		0.775	—	0.775	—	0.775	—	UI
tDIA_GDDR1	Output Data Invalid After CLK Output	—	0.3	—	0.369	—	0.435	ns
tDIB_GDDR1	Output Data Invalid Before CLK Output	—	0.3	—	0.369	—	0.435	ns
fDATA_GDDR1	Input/Output Data Rate	—	500	—	500	—	424	Mbps
fMAX_GDDR1	Frequency for PCLK	—	250	—	250	—	212	MHz

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
½ UI	Half of Data Bit Time, or 90 degree	1	—	1	—	1.179	—	ns
Output TX to Input RX Margin per Edge		0.15	—	0.081	—	0.095	—	ns
Generic DDRX2 Inputs/Outputs with Clock and Data Centered at Pin (GDDR2_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 3.7 and Figure 3.9								
t _{SU_GDDR2}	Data Setup before CLK Input	0.175	—	0.175	—	0.206	—	ns
		0.175	—	0.175	—	0.175	—	UI
t _{HO_GDDR2}	Data Hold after CLK Input	0.177	—	0.177	—	0.206	—	ns
t _{DVB_GDDR2}	Output Data Valid Before CLK Output	0.38	—	0.352	—	0.415	—	ns
		–0.12	—	–0.148	—	–0.174	—	ns + ½UI
t _{DQVA_GDDR2}	Output Data Valid After CLK Output	0.38	—	0.352	—	0.415	—	ns
		–0.12	—	–0.148	—	–0.174	—	ns + ½UI
f _{DATA_GDDR2}	Input/Output Data Rate	—	1000	—	1000	—	848	Mbps
f _{MAX_GDDR2}	Frequency for ECLK	—	500	—	500	—	424	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.5	—	0.5	—	0.589	—	ns
f _{PCLK}	PCLK frequency	—	250	—	250	—	212.1	MHz
Output TX to Input RX Margin per Edge		0.23	—	0.202	—	0.239	—	ns
Generic DDRX2 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR2_RX/TX.ECLK.Aligned) using PCLK Clock Input – Figure 3.8 and Figure 3.10								
t _{DVA_GDDR2}	Input Data Valid After CLK	—	–0.275	—	–0.275	—	–0.324	ns + ½UI
		—	0.225	—	0.225	—	0.265	ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR2}	Input Data Hold After CLK	0.275	—	0.275	—	0.324	—	ns + ½UI
		0.775	—	0.775	—	0.914	—	ns
		0.775	—	0.775	—	0.775	—	UI
t _{DIA_GDDR2}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.174	ns
t _{DIB_GDDR2}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR2}	Input/Output Data Rate	—	1000	—	1000	—	848	Mbps
f _{MAX_GDDR2}	Frequency for ECLK	—	500	—	500	—	424	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.5	—	0.5	—	0.589	—	ns
f _{PCLK}	PCLK frequency	—	250	—	250	—	212.1	MHz
Output TX to Input RX Margin per Edge		0.105	—	0.077	—	0.091	—	ns
Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 3.7 and Figure 3.9								
t _{SU_GDDR4}	Input Data Set-Up Before CLK	0.168	—	0.210	—	0.244	—	ns
		0.252	—	0.252	—	0.252	—	UI
t _{HO_GDDR4}	Input Data Hold After CLK	0.174	—	0.210	—	0.244	—	ns
t _{DVB_GDDR4}	Output Data Valid Before CLK Output	0.213	—	0.269	—	0.309	—	ns
		–0.12	—	–0.148	—	–0.174	—	ns + ½ UI
t _{DQVA_GDDR4}	Output Data Valid After CLK Output	0.213	—	0.269	—	0.309	—	ns
		–0.12	—	–0.148	—	–0.174	—	ns + ½ UI
f _{DATA_GDDR4}	Input/Output Data Rate	—	1500	—	1200	—	1034	Mbps
f _{MAX_GDDR4}	Frequency for ECLK	—	750	—	600	—	517	MHz


Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
½ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns
f _{PCLK}	PCLK Frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.08	—	0.102	—	0.116	—	ns
Generic DDRX4 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR4_RX/TX.ECLK.Aligned) using PCLK Clock Input, Left and Right sides Only – Figure 3.8 and Figure 3.10								
t _{DVA_GDDR4}	Input Data Valid After CLK	—	–0.183	—	–0.229	—	–0.266	ns + ½UI
		—	0.15	—	0.188	—	0.218	ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR4}	Input Data Hold After CLK	0.183	—	0.229	—	0.266	—	ns + ½UI
		0.517	—	0.646	—	0.749	—	ns
		0.775	—	0.775	—	0.775	—	UI
t _{DIA_GDDR4}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.17	ns
t _{DIB_GDDR4}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR4}	Input/Output Data Rate	—	1500	—	1200	—	1034	Mbps
f _{MAX_GDDR4}	Frequency for ECLK	—	750	—	600	—	517	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns
f _{PCLK}	PCLK frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.03	—	0.04	—	0.044	—	ns
Generic DDRX5 Inputs/Outputs with Clock and Data Centered at Pin (GDDR5_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 3.7 and Figure 3.9								
t _{SU_GDDR5}	Input Data Set-Up Before CLK	0.179	—	0.187	—	0.224	—	ns
		0.224	—	0.224	—	0.224	—	UI
t _{HO_GDDR5}	Input Data Hold After CLK	0.181	—	0.187	—	0.224	—	ns
t _{WINDOW_GDDR5C}	Input Data Valid Window	0.36	—	0.374	—	0.448	—	ns
t _{DVB_GDDR5}	Output Data Valid Before CLK Output	0.28	—	0.269	—	0.326	—	ns
		–0.120	—	–0.148	—	–0.174	—	ns+½UI
t _{DQVA_GDDR5}	Output Data Valid After CLK Output	0.28	—	0.269	—	0.326	—	ns
		–0.120	—	–0.148	—	–0.174	—	ns+½UI
f _{DATA_GDDR5}	Input/Output Data Rate	—	1250	—	1200	—	1000	Mbps
f _{MAX_GDDR5}	Frequency for ECLK	—	625	—	600	—	500	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.4	—	0.417	—	0.5	—	ns
f _{PCLK}	PCLK frequency	—	125	—	120	—	100	MHz
Output TX to Input RX Margin per Edge		0.12	—	0.102	—	0.126	—	ns
Generic DDRX5 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR5_RX/TX.ECLK.Aligned) using PCLK Clock Input – Figure 3.8 and Figure 3.10								
t _{DVA_GDDR5}	Input Data Valid After CLK	—	–0.220	—	–0.229	—	–0.275	ns + ½UI
		—	0.18	—	0.188	—	0.225	Ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR5}	Input Data Hold After CLK	0.22	—	0.229	—	0.275	—	ns + ½UI
		0.62	—	0.646	—	0.775	—	ns
		0.775	—	0.775	—	0.775	—	UI
t _{WINDOW_GDDR5A}	Input Data Valid Window	0.440	—	0.458	—	0.550	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
t _{DIA_GDDR5}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.174	ns
t _{DIB_GDDR5}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR5}	Input/Output Data Rate	—	1250	—	1200	—	1000	Mbps
f _{MAX_GDDR5}	Frequency for ECLK	—	625	—	600	—	500	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.4	—	0.417	—	0.5	—	ns
f _{PCLK}	PCLK frequency	—	125	—	120	—	100	MHz
Output TX to Input RX Margin per Edge		0.06	—	0.04	—	0.051	—	ns
Soft D-PHY DDRX4 Inputs/Outputs with Clock and Data Centered at Pin, using PCLK Clock Input								
t _{SU_GDDR4_MP}	Input Data Set-Up Before CLK	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
t _{HO_GDDR4_MP}	Input Data Hold After CLK	0.133	—	0.167	—	0.193	—	ns
t _{DVB_GDDR4_MP}	Output Data Valid Before CLK Output	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
t _{DQVA_GDDR4_MP}	Output Data Valid After CLK Output	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
f _{DATA_GDDR4_MP}	Input Data Bit Rate for MIPI PHY	—	1500	—	1200	—	1034	Mbps
½ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns
f _{PCLK}	PCLK frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.067	—	0.083	—	0.097	—	ns
Video DDRX71 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR71_RX.ECLK) using PLL Clock Input – Figure 3.12 and Figure 3.13								
t _{RPBI_DVA}	Input Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	—	0.264	—	0.264	—	0.3	UI
		—	–0.250	—	–0.250	—	–0.249	ns+(½i)*UI
t _{RPBI_DVE}	Input Hold Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	0.722	—	0.722	—	0.7	—	UI
		0.235	—	0.235	—	0.249	—	ns+(½i)*UI
t _{TPBI_DOV}	Data Output Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	—	0.159	—	0.159	—	0.187	ns+i*UI
t _{TPBI_DOI}	Data Output Invalid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	0.159	—	0.159	—	0.187	—	ns+(i+1)*UI
t _{TPBI_skew_UI}	TX skew in UI	—	0.15	—	0.15	—	0.15	UI
t _B	Serial Data Bit Time, = 1UI	1.058	—	1.058	—	1.247	—	ns
f _{DATA_TX71}	DDR71 Serial Data Rate	—	945	—	945	—	802	Mbps
f _{MAX_TX71}	DDR71 ECLK Frequency	—	473	—	473	—	401	MHz
f _{CLKIN}	7:1 Clock (PCLK) Frequency	—	135	—	135	—	114.5	MHz
Output TX to Input RX Margin per Edge		0.159	—	0.159	—	0.187	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
Memory Interface								
DDR3/DDR3L READ (DQ Input Data are Aligned to DQS) – Figure 3.8								
t _{DVBQD_DDR3} t _{DVBQD_DDR3L}	Data Input Valid before DQS Input	—	–0.235	—	–0.235	—	–0.277	ns + ½UI
t _{DVADQ_DDR3} t _{DVADQ_DDR3L}	Data Input Valid after DQS Input	0.235	—	0.235	—	0.277	—	ns + ½UI
f _{DATA_DDR3} f _{DATA_DDR3L}	DDR Memory Data Rate	—	1066	—	1066	—	904	Mb/s
f _{MAX_ECLK_DDR3} f _{MAX_ECLK_DDR3L}	DDR Memory ECLK Frequency	—	533	—	533	—	452	MHz
f _{MAX_SCLK_DDR3} f _{MAX_SCLK_DDR3L}	DDR Memory SCLK Frequency	—	133.3	—	133.3	—	113	MHz
DDR3/DDR3L WRITE (DQ Output Data are Centered to DQS) – Figure 3.11								
t _{DQVBS_DDR3} t _{DQVBS_DDR3L}	Data Output Valid before DQS Output	—	–0.235	—	–0.235	—	–0.277	ns + ½UI
t _{DQVAS_DDR3} t _{DQVAS_DDR3L}	Data Output Valid after DQS Output	0.235	—	0.235	—	0.277	—	ns + ½UI
f _{DATA_DDR3} f _{DATA_DDR3L}	DDR Memory Data Rate	—	1066	—	1066	—	904	Mb/s
f _{MAX_ECLK_DDR3} f _{MAX_ECLK_DDR3L}	DDR Memory ECLK Frequency	—	533	—	533	—	452	MHz
f _{MAX_SCLK_DDR3} f _{MAX_SCLK_DDR3L}	DDR Memory SCLK Frequency	—	133.3	—	133.3	—	113	MHz

Notes:

- Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from the Lattice Radiant software.
- General I/O timing numbers are based on LVCMOS 1.8, 8 mA, Fast Slew Rate, 0 pf load for all IOs except the bank1. For bank1, the number are based on LVCMOS 3.3, 12 mA, Fast Slew Rate, 0 pf load.
Generic DDR timing are numbers based on LVDS I/O.
DDR3 timing numbers are based on SSTL15.
- Uses LVDS I/O standard for measurements.
- Maximum clock frequencies are tested under best case conditions. System performance may vary upon the user environment.
- All numbers are generated with the Lattice Radiant software.
- This clock skew is not the internal clock network skew. Nexus family devices have very low internal clock network skew that can be approximated to 0 ps. These t_{skew} values measured externally at system level includes additional skew added by the I/O, wire bonding and package ball.

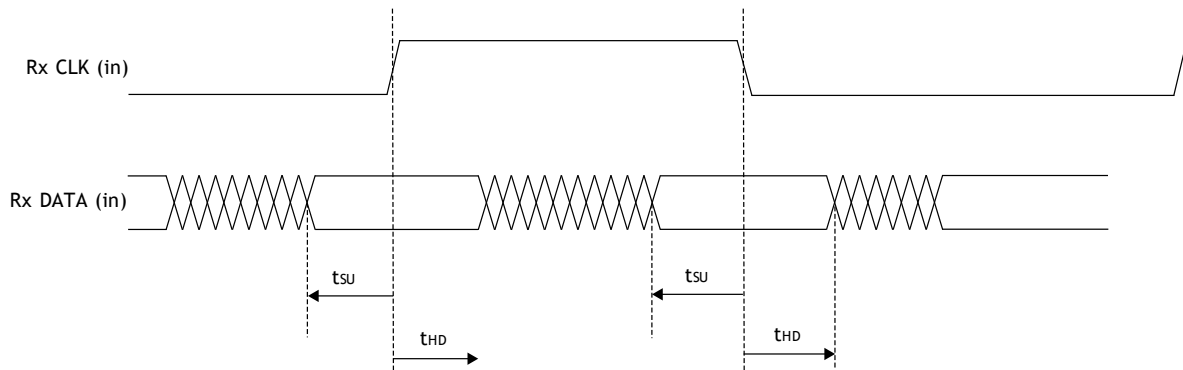
Figure 3.7. Receiver RX.CLK.Centered Waveforms

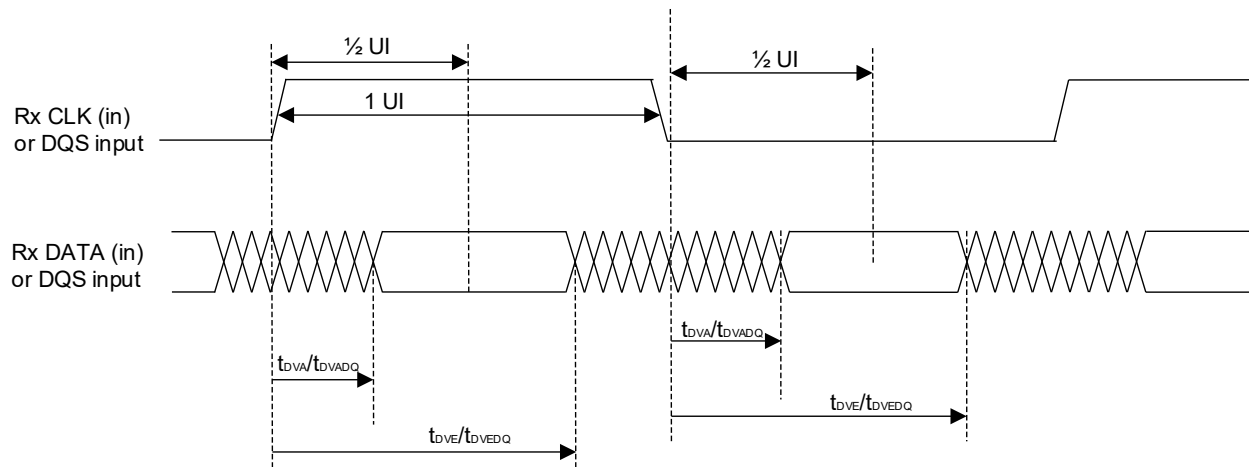


Figure 3.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms

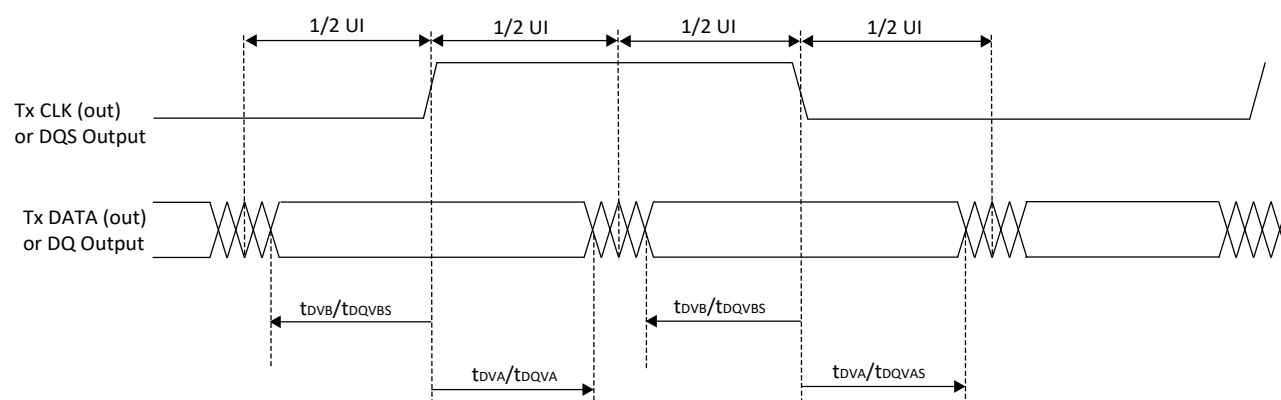


Figure 3.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms


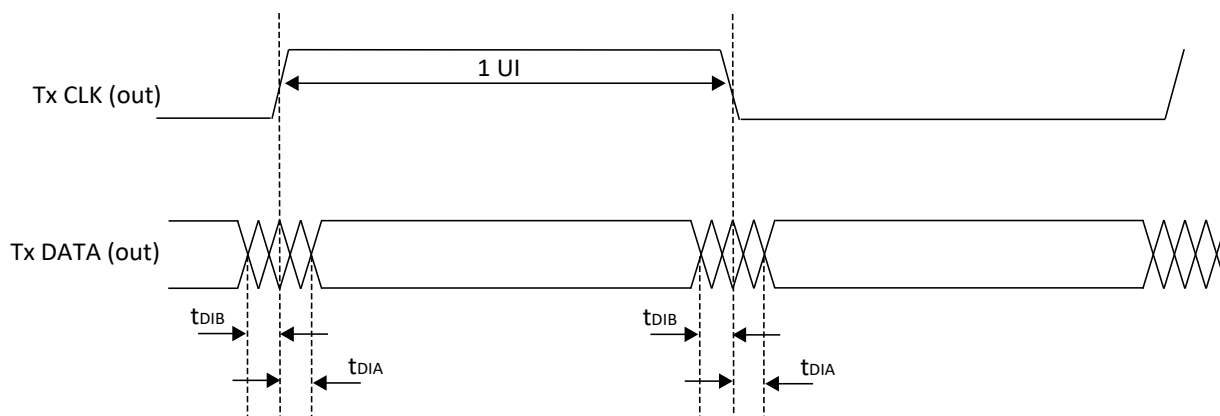


Figure 3.10. Transmit TX.CLK.Aligned Waveforms

Receiver – Shown for one LVDS Channel

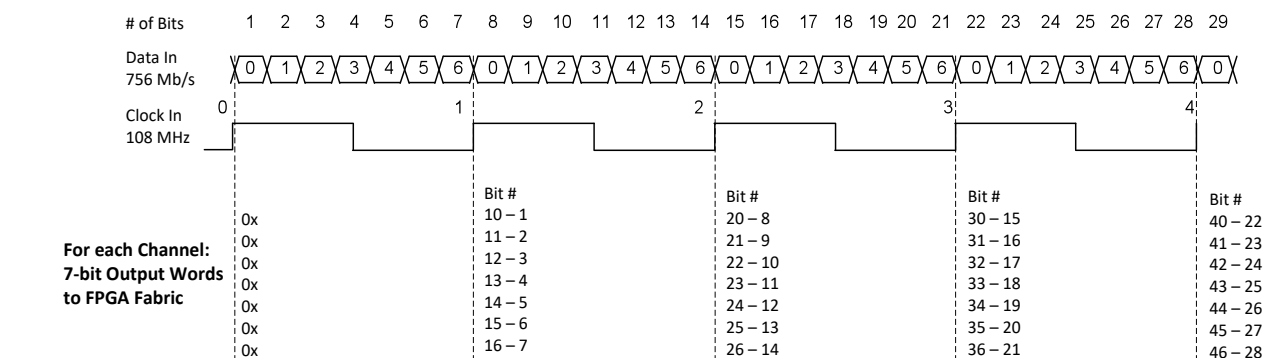

Transmitter – Shown for one LVDS Channel

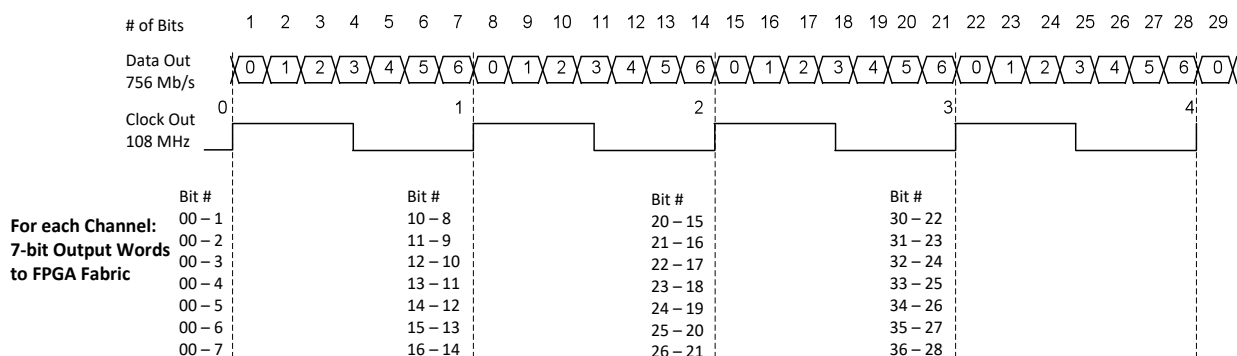


Figure 3.11. DDRX71 Video Timing Waveforms

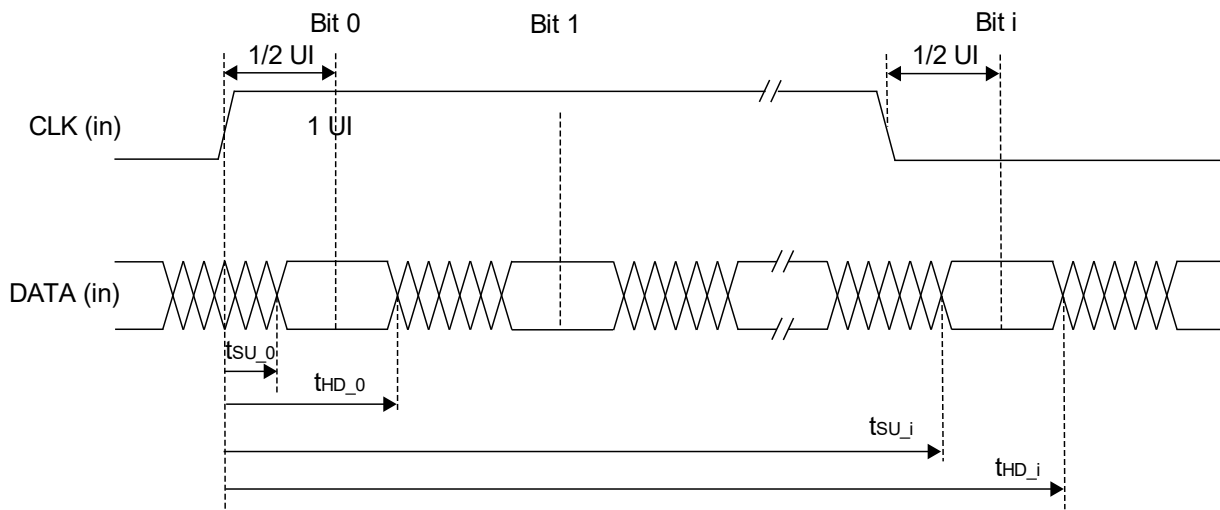


Figure 3.12. Receiver DDRX71_RX Waveforms

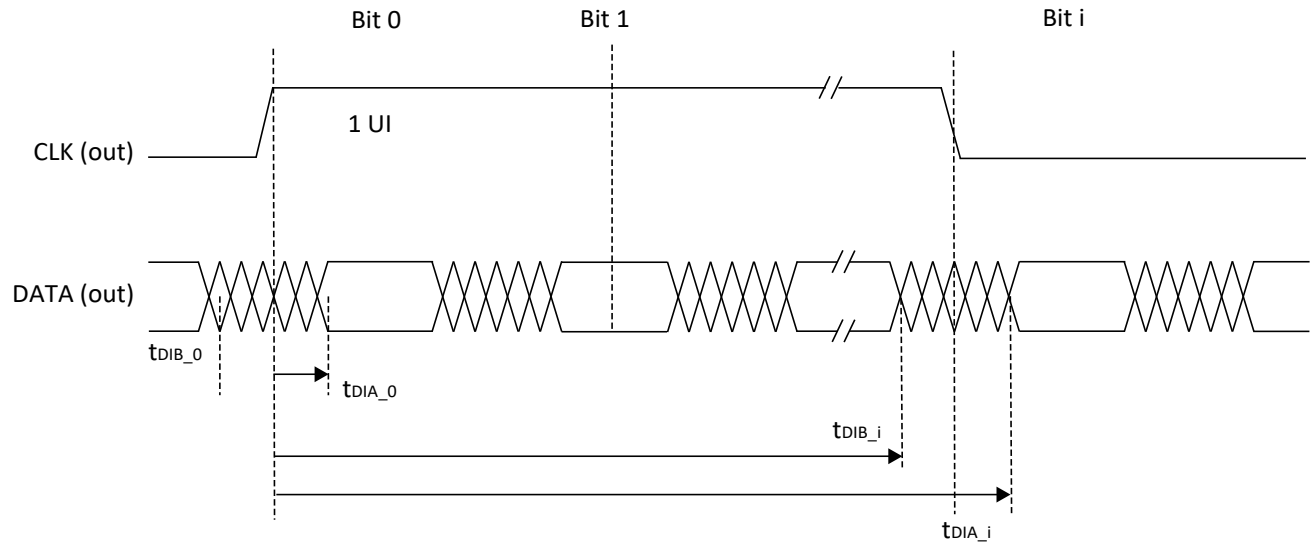


Figure 3.13. Transmitter DDRX71_TX Waveforms

3.19. sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$)

Over recommended operating conditions.

Table 3.35. sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$)

Parameter	Descriptions	Conditions	Min	Typ.	Max	Units
f _{IN}	Input Clock Frequency (CLKI, CLKFB)	—	18	—	500	MHz
f _{OUT}	Output Clock Frequency	—	6.25	—	800	MHz
f _{VCO}	PLL VCO Frequency	—	800	—	1600	MHz
f _{PFD}	Phase Detector Input Frequency	Without Fractional-N Enabled	18	—	500	MHz
		With Fractional-N Enabled	18	—	100	MHz
AC Characteristics						
t _{DT}	Output Clock Duty Cycle	—	45	—	55	%
t _{PH} ⁴	Output Phase Accuracy	—	−5	—	5	%
t _{OPJIT} ¹	Output Clock Period Jitter	f _{OUT} ≥ 200 MHz	—	—	250	ps p-p
		f _{OUT} < 200 MHz	—	—	0.05	UIPP
	Output Clock Cycle-to-Cycle Jitter	f _{OUT} ≥ 200 MHz	—	—	250	ps p-p
		f _{OUT} < 200 MHz	—	—	0.05	UIPP
	Output Clock Phase Jitter	f _{PFD} ≥ 200 MHz	—	—	250	ps p-p
		60 MHz ≤ f _{PFD} < 200 MHz	—	—	350	ps p-p
		30 MHz ≤ f _{PFD} < 60 MHz	—	—	450	ps p-p
		18 MHz ≤ f _{PFD} < 30 MHz	—	—	650	ps p-p
	Output Clock Period Jitter (Fractional-N)	f _{OUT} ≥ 200 MHz	—	—	350	ps p-p
		f _{OUT} < 200 MHz	—	—	0.07	UIPP
	Output Clock Cycle-to-Cycle Jitter (Fractional-N)	f _{OUT} ≥ 200 MHz	—	—	400	ps p-p
		f _{OUT} < 200 MHz	—	—	0.08	UIPP
f _{BW} ³	PLL Loop Bandwidth	—	0.45	—	13	MHz
t _{LOCK} ²	PLL Lock-in Time	—	—	—	10	ms
t _{UNLOCK}	PLL Unlock Time (from RESET goes HIGH)	—	—	—	50	ns
t _{IPJIT}	Input Clock Period Jitter	f _{PFD} ≥ 20 MHz	—	—	500	ps p-p
t _{HI}	Input Clock High Time	90% to 90%	0.5	—	—	ns
t _{LO}	Input Clock Low Time	10% to 10%	0.5	—	—	ns
t _{RST}	RST/ Pulse Width	—	1	—	—	ms
f _{SSC_MOD}	Spread Spectrum Clock Modulation Frequency	—	20	—	200	kHz
f _{SSC_MOD_AMP}	Spread Spectrum Clock Modulation Amplitude Range	—	0.25	—	2.00	%
f _{SSC_MOD_STEP}	Spread Spectrum Clock Modulation Amplitude Step Size	—	—	0.25	—	%

Notes:

1. Jitter sample is taken over 10,000 samples for Period jitter, and 1,000 samples for Cycle-to-Cycle jitter of the primary PLL output with clean reference clock with no additional I/O toggling.
2. Output clock is valid after t_{LOCK} for PLL reset and dynamic delay adjustment.
3. Result from Lattice Radiant software.
4. CLKOS as compared to CLKOP output for one phase step at the maximum VCO frequency.

3.20. Internal Oscillators Characteristics

Table 3.36. Internal Oscillators ($V_{CC} = 1.0\text{ V}$)

Symbol	Parameter Description	Min	Typ	Max	Unit
f_{CLKHF}	HFOSC CLKK Clock Frequency	418.5	450	481.5	MHz
f_{CLKLF}	LFOSC CLKK Clock Frequency	25.6	32	38.4	kHz
DCH_{CLKHF}	HFOSC Duty Cycle (Clock High Period)	45	50	55	%
DCH_{CLKLF}	LFOSC Duty Cycle (Clock High Period)	45	50	55	%

3.21. Flash Download Time

Table 3.37. Flash Download Time

Symbol	Parameter	Device	Typ.	Units
$t_{REFRESH}$	POR to Device I/O Active	LFMXO5-25	46	ms

Notes:

- Assumes sysMEM EBR initialized to an all zero pattern if they are used.
- The Flash download time is measured starting from the maximum voltage of POR trip point.

3.22. Flash Program and Erase Current

Table 3.38. Program and Erase Supply Current

Symbol	Parameter	Device	Typ.	Units
I_{CC}	Core Power Supply	LFMXO5-25	26	mA

3.23. User I2C Characteristics

Table 3.39. User I2C Specifications ($V_{CC} = 1.0\text{ V}$)

Symbol	Parameter Description	STD Mode			FAST Mode			FAST Mode Plus ²			Units
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
f_{SCL}	SCL Clock Frequency	—	—	100	—	—	400	—	—	1000	kHz
T_{DELAY}^1	Optional delay through delay block	—	62	—	—	62	—	—	62	—	ns

Notes:

- Refer to the I2C Specification for timing requirements. User design should set constraints in Lattice Design Software to meet this industrial I2C Specification.
- Fast Mode Plus maximum speed may be achieved by using external pull up resistor on I2C bus. Internal pull up may not be sufficient to support the maximum speed.

3.24. Analog-Digital Converter (ADC) Block Characteristics

Table 3.40. ADC Specifications¹

Symbol	Description	Condition	Min	Typ	Max	Unit
V_{REFINT_ADC}	ADC Internal Reference Voltage ⁴	—	1.14 ²	1.2	1.26 ²	V
V_{REFEXT_ADC}	ADC External Reference Voltage	—	1.0	—	1.8	V
N_{RES_ADC}	ADC Resolution	—	—	12	—	bits
$ENOB_{ADC}$	Effective Number of Bits	—	9.9	11	—	bits
V_{SR_ADC}	ADC Input Range	Bipolar Mode, Internal V_{REF}	$V_{CM_ADC} - V_{REFINT_ADC}/4$	V_{CM_ADC}	$V_{CM_ADC} + V_{REFINT_ADC}/4$	V
		Bipolar Mode, External V_{REF}	$V_{CM_ADC} - V_{REFEXT_ADC}/4$	V_{REFEXT_ADC}	$V_{CM_ADC} + V_{REFEXT_ADC}/4$	V
		Uni-polar Mode, Internal V_{REF}	0	—	V_{REFINT_ADC}	V
		Uni-polar Mode, External V_{REF}	0	—	V_{REFEXT_ADC}	V
V_{CM_ADC}	ADC Input Common Mode Voltage (for fully differential signals)	Internal V_{REF}	—	$V_{REFINT_ADC}/2$	—	V
		External V_{REF}	—	$V_{REFEXT_ADC}/2$	—	V
f_{CLK_ADC}	ADC Clock Frequency	—	—	25	50	MHz
f_{INPUT_ADC}	ADC Input Frequency	@ Sampling Frequency = 1 Mbps	—	—	500	kHz
FS_{ADC}	ADC Sampling Rate	—	—	1	—	MS/s
N_{TRACK_ADC}	ADC Input Tracking Time	—	4	—	—	cycles ³
R_{IN_ADC}	ADC Input Equivalent Resistance	—	—	116	—	K Ω
t_{CAL_ADC}	ADC Calibration Time	—	—	—	6500	cycles ³
L_{OUTput_ADC}	ADC Conversion Time	Includes minimum tracking time of four cycles	25	—	—	cycles ³
DNL_{ADC}	ADC Differential Nonlinearity	—	–1	—	1	LSB
INL_{ADC}	ADC Integral Nonlinearity	—	–2 ²	—	2.21	LSB
$SFDR_{ADC}$	ADC Spurious Free Dynamic Range	—	67.7	77	—	dBc
THD_{ADC}	ADC Total Harmonic Distortion	—	—	–76	–66.8	dB
SNR_{ADC}	ADC Signal to Noise Ratio	—	61.9	68	—	dB
$SNDR_{ADC}$	ADC Signal to Noise Plus Distortion Ratio	—	61.7	67	—	dB
ERR_{GAIN_ADC}	ADC Gain Error	—	–0.5	—	0.5	% FS_{ADC}
ERR_{OFFSET_ADC}	ADC Offset Error	—	–2	—	2	% FS_{ADC}
C_{IN_ADC}	ADC Input Equivalent Capacitance	—	—	2	—	pF

Notes:

1. ADC is available in select speed grades. See Ordering Information.
2. Not tested; guaranteed by design.
3. ADC Sample Clock cycles. See [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.
4. Internal voltage reference is only for internal testing purpose. It is not recommended for customer design. User should always use the part with external reference voltage.

3.25. Comparator Block Characteristics

Table 3.41. Comparator Specifications

Symbol	Description	Min	Typ	Max	Unit
f_{IN_COMP}	Comparator Input Frequency	—	—	10	MHz
V_{IN_COMP}	Comparator Input Voltage	0	—	$V_{CCADC18}$	V
V_{OFFSET_COMP}	Comparator Input Offset	–23	—	24	mV
V_{HYST_COMP}	Comparator Input Hysteresis	10	—	31	mV
$V_{LATENCY_COMP}$	Comparator Latency	—	—	31	ns

Note: Comparator is available in select speed grades. See Ordering Information.

3.26. Digital Temperature Readout Characteristics

Digital temperature Readout (DTR) is implemented in one of the channels of ADC1.

Table 3.42. DTR Specifications^{1, 2}

Symbol	Description	Condition	Min	Typ	Max	Unit
DTR_{RANGE}	DTR Detect Temperature Range	—	–40	—	100	°C
$DTR_{ACCURACY}$	DTR Accuracy	with external voltage ¹ reference range of 1.0 V to 1.8 V	–13	±4	13	°C
$DTR_{RESOLUTION}$	DTR Resolution	with external voltage reference	–0.3	—	0.3	°C

Notes:

- External voltage reference (VREF) should be 0.1% accurate or better. DTR sensitivity to VREF is –4.1 °C per VREF per-cent (for example, if the VREF is 1 % low, then the DTR will read +4.1 °C high).
- DTR is available in select speed grades. See the [Ordering Information](#) section.

3.27. Hardened SGMII Receiver Characteristics

3.27.1. SGMII Rx Specifications

Over recommended operating conditions.

Table 3.43. SGMII¹ Rx

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
f_{DATA}	SGMII Data Rate	—	—	1250	—	MHz
f_{REFCLK}	SGMII Reference Clock Frequency (Data Rate/10)	—	—	125	—	MHz
J_{TOL_DJ}	Jitter Tolerance, Deterministic	Periodic jitter < 300 kHz	—	—	0.1 ²	UI
J_{TOL_TJ}	Jitter Tolerance, Total	Periodic jitter < 300 kHz	—	—	0.3 ²	UI
$\Delta f/f$	Data Rate and Reference Clock Accuracy	—	–300	—	300	ppm

Notes:

- The SGMII interface using LVDS I/O has limitations when operating across the full specified temperature range. Lattice recommends using alternative interfaces, such as SERDES or RGMII, for designs requiring Gigabit Ethernet. Refer to the [Knowledge Database article](#) for details. Contact your local Lattice sales representative for more information.
- J_{TOT} can meet the following jitter mask specification:
 - 0 to 3.5 kHz: 10 UI;
 - 3.5 to 700 kHz: log-log slope 10 UI to 0.05 UI;
 - above 700 kHz: 0.05 UI.

3.28. sysCONFIG Port Timing Specifications

Over recommended operating conditions.

Table 3.44. sysCONFIG Port Timing Specifications

Symbol	Parameter	Device	Min	Typ.	Max	Unit
Slave SPI/I2C/I3C POR / REFRESH Timing						
$t_{\text{MSPI_INH}}$	Time during POR, from V_{CC} , V_{CCAUX} , V_{CCIO0} or V_{CCIO1} (whichever is the last) pass POR trip voltage, or REFRESH command executed, to pull PROGRAMN LOW to prevent entering MSPI mode	—	—	—	1	μs
$t_{\text{ACT_PROGRAMN_H}}$	Minimum time driving PROGRAMN HIGH after last activation clock	—	50	—	—	ns
$t_{\text{CONFIG_CCLK}}$	Minimum time to start driving CCLK (SSPI) after PROGRAMN HIGH	—	50	—	—	ns
$t_{\text{CONFIG_SCL}}$	Minimum time to start driving SCL (I2C/I3C) after PROGRAMN HIGH	—	50	—	—	ns
PROGRAMN Configuration Timing						
$t_{\text{PROGRAMN_L}}$	PROGRAMN LOW pulse accepted	—	50	—	—	ns
$t_{\text{PROGRAMN_H}}$	PROGRAMN HIGH pulse accepted	—	60	—	—	ns
$t_{\text{PROGRAMN_RJ}}$	PROGRAMN LOW pulse rejected	—	—	—	25	ns
t_{INITL}	INITN LOW to INITN HIGH (SRAM initialization period)	—	—	—	39.9	μs
$t_{\text{INIT_LOW}}$	PROGRAMN LOW to INITN LOW	—	—	—	100	ns
$t_{\text{INIT_HIGH}}$	PROGRAMN LOW to INITN HIGH	—	—	—	40	μs
$t_{\text{DONE_LOW}}$	PROGRAMN LOW to DONE LOW	—	—	—	55	μs
$t_{\text{DONE_HIGH}}^1$	PROGRAMN HIGH to DONE HIGH	—	—	—	2	s
t_{IODISS}	PROGRAMN LOW to I/O Disabled	—	—	—	125	ns
Slave SPI						
$f_{\text{CCLK_W}}$	CCLK input clock frequency (For write transaction) ²	—	—	—	135	MHz
$f_{\text{CCLK_R}}$	CCLK input clock frequency (For read transaction) ³	—	—	—	— ⁴	MHz
t_{CCLKH}	CCLK input clock pulse width HIGH	—	3.5	—	—	ns
t_{CCLKL}	CCLK input clock pulse width LOW	—	3.5	—	—	ns
$t_{\text{VMC_SLAVE}}$	Time from rising edge of INITN to Slave CCLK driven	—	50	—	—	ns
$t_{\text{VMC_MASTER}}$	CCLK input clock duty cycle	—	40	—	60	%
$t_{\text{SU_SSI}}$	SSI to CCLK setup time	—	3.2	—	—	ns
$t_{\text{HD_SSI}}$	SSI to CCLK hold time	—	1.9	—	—	ns
$t_{\text{CO_SSO}}$	CCLK falling edge to valid SSO output	—	3.0 ⁵	—	16 ⁵	ns
$t_{\text{EN_SSO}}$	CCLK falling edge to SSO output enabled	—	3.0 ⁵	—	16 ⁵	ns
$t_{\text{DIS_SSO}}$	CCLK falling edge to SSO output disabled	—	3.0 ⁵	—	16 ⁵	ns
$t_{\text{HIGH_SCSN}}$	SCSN HIGH time	—	74	—	—	ns
$t_{\text{SU_SCSN}}$	SCSN to CCLK setup time	—	3.5	—	—	ns
$t_{\text{HD_SCSN}}$	SCSN to CCLK hold time	—	1.6	—	—	ns
I2C/I3C						
$f_{\text{SCL_I2C}}$	SCL input clock frequency for I2C	—	—	—	1	MHz
$f_{\text{SCL_I3C}}$	SCL input clock frequency for I3C	—	—	—	12	MHz
$t_{\text{SCLH_I2C}}$	SCL input clock pulse width HIGH for I2C	—	400	—	—	ns

Symbol	Parameter	Device	Min	Typ.	Max	Unit
t_{SCL_I2C}	SCL input clock pulse width LOW for I2C	—	400	—	—	ns
$t_{SU_SDA_I2C}$	SDA to SCL setup time for I2C	—	250	—	—	ns
$t_{HD_SDA_I2C}$	SDA to SCL hold time for I2C	—	50	—	—	ns
$t_{SU_SDA_I3C}$	SDA to SCL setup time for I3C	—	30	—	—	ns
$t_{HD_SDA_I3C}$	SDA to SCL hold time for I3C	—	30	—	—	ns
t_{CO_SDA}	SCL falling edge to valid SDA output	—	—	—	200	ns
t_{EN_SDA}	SCL falling edge to SDA output enabled	—	—	—	200	ns
t_{DIS_SDA}	SCL falling edge to SDA output disabled	—	—	—	200	ns
Wake-Up Timing						
t_{DONE_HIGH}	Last configuration clock cycle to DONE going HIGH	—	—	—	60	μs
$t_{FIO_EN}^1$	User I/O enabled in Fast I/O Mode	—	—	31.104	—	M cycles
t_{IOEN}^1	Config clock to user I/O enabled	—	130	—	—	ns

Notes:

- Based on 30k uncompressed/unauthenticated/default MCLK timing (3.5 MHz)/×1. Other permutations result in different values.
- Supported input clock frequency for bursting in configuration bitstream to the device.
- Supported input clock frequency for reading out data transactions from the device.
- Refer to the following equations to determine the supported input clock frequency for read transaction. Assumption: The skew between CCLK and SSO on board is zero.

$$\frac{1}{2} CCLK - t_{CO}(max) - T_{su} > 0$$

$$CCLK > 2(t_{CO}(max) + T_{su})$$

CCLK – Input clock period. $f_{CCLK_R} = 1/CCLK$.

$t_{CO}(max)$ – Equivalent to t_{CO_SSO} or t_{EN_SSO} max value.

T_{su} – Setup time requirement for host controller I/O.

For customer that can only use single clock for read/write operation, the Fmax is limited by the Fmax for read operation.

For example: $t_{CO}(max) = 30$ ns and $T_{su} = 2$ ns.

$$CCLK > 2(t_{CO}(max) + T_{su})$$

$$CCLK > 2(30\text{ ns} + 2\text{ ns})$$

$$CCLK > 64\text{ ns}$$

$$f_{CCLK_R} = \frac{1}{64\text{ ns}} = 15.62\text{MHz}$$

For the customer that wants to do the programming at 135 MHz or faster than Fmax for read operation:

- Have a mechanism in the host controller to switch between read clock and write clock for read/write transaction. For example, refer to SPI specification to switch between read and write clock by changing the SPI Baud Rate Register (SPIBR) if standard SPI controller is used as the host.
 - Implementing a mechanism to adjust/calibrate the sampling clock edge when the valid data becomes available.
- Based on SLOW (default) slew rate control on Config output pins.

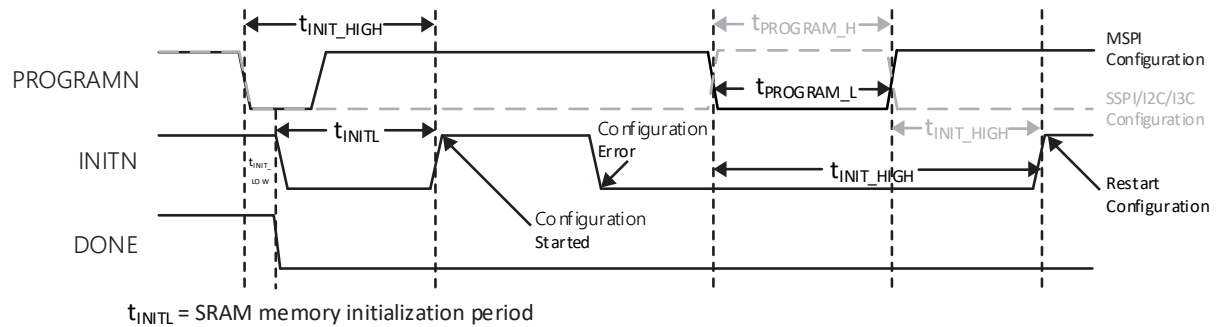


Figure 3.14. Configuration Error Notification (1)

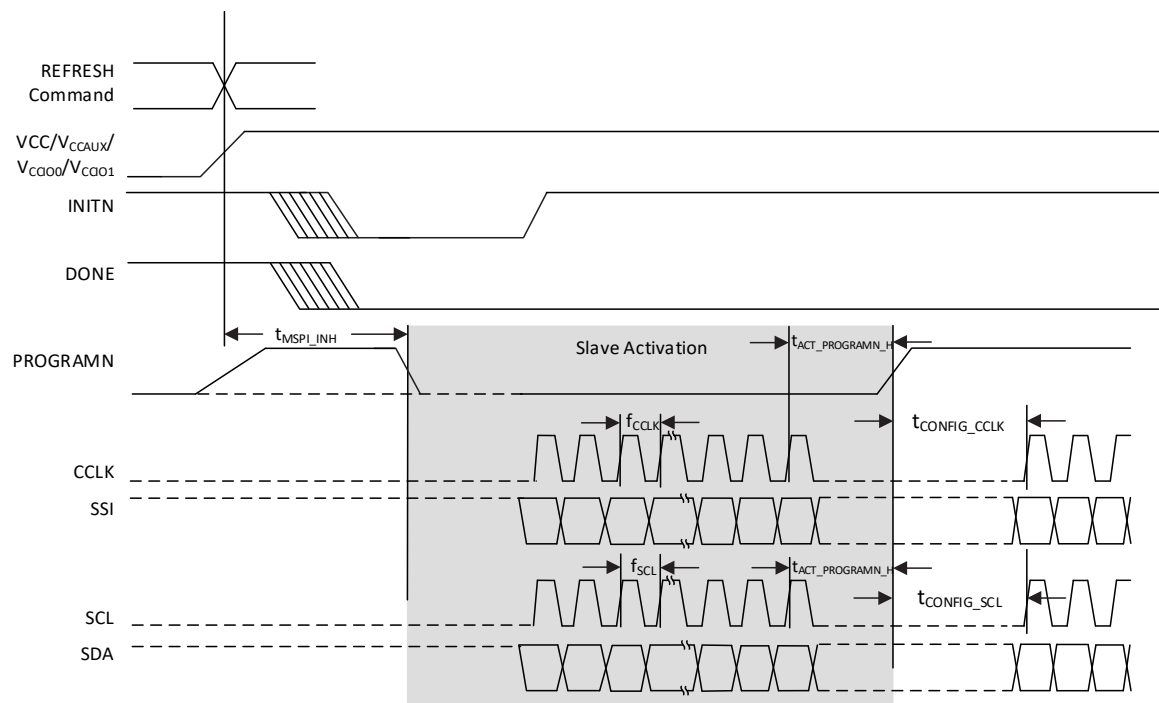


Figure 3.15. Slave SPI/I2C/I3C POR/REFRESH Timing

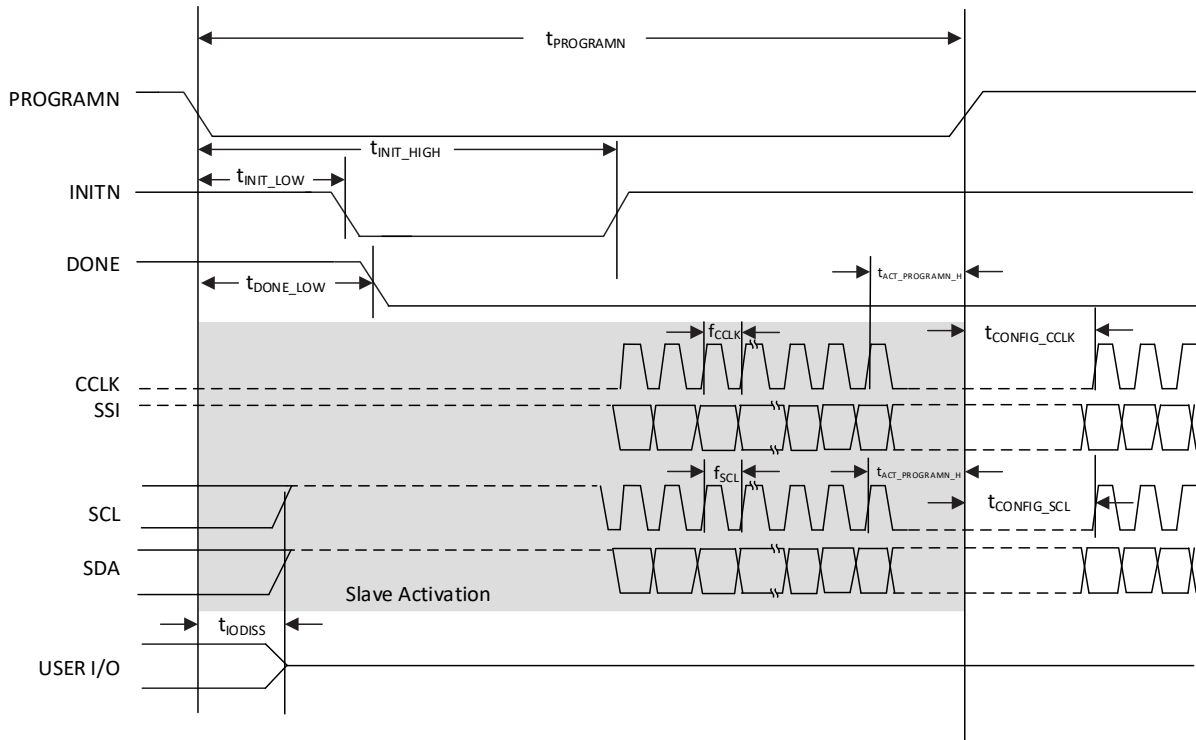


Figure 3.16. Slave SPI/I2C/I3C PROGRAMN Timing

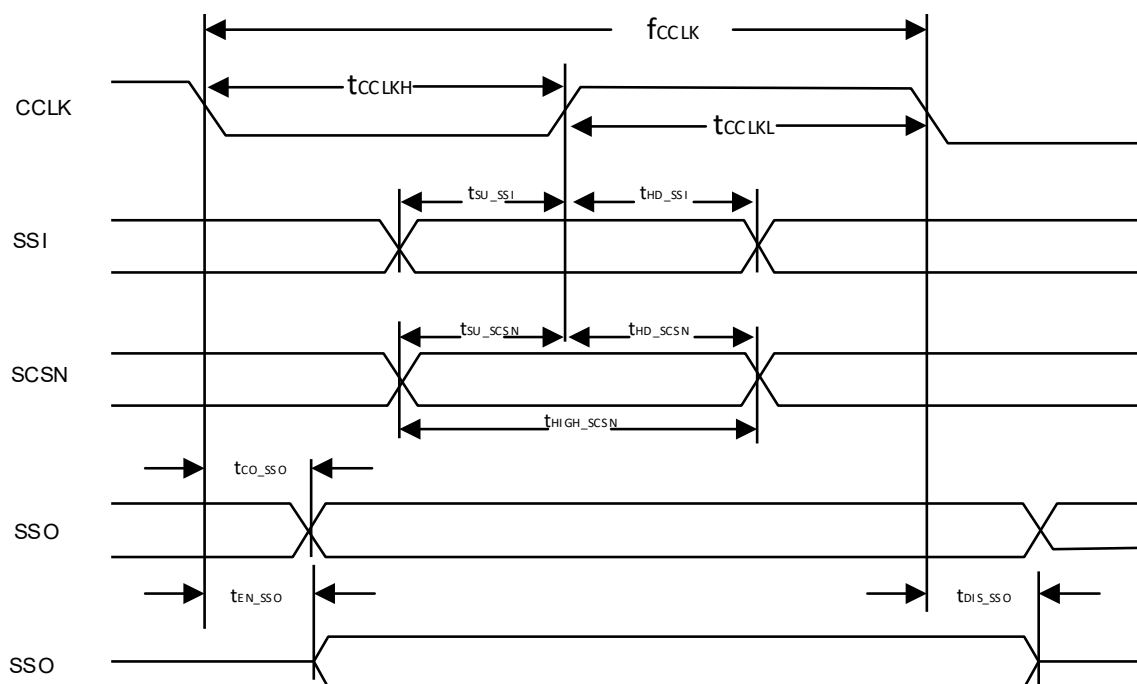


Figure 3.17. Slave SPI Configuration Timing

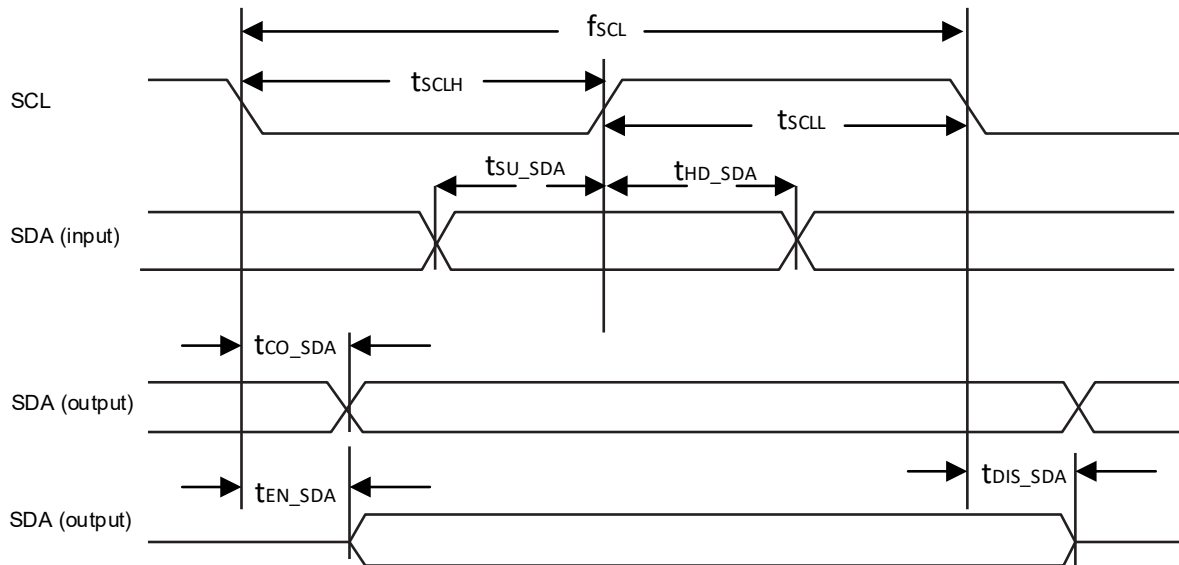


Figure 3.18. I2C /I3C Configuration Timing

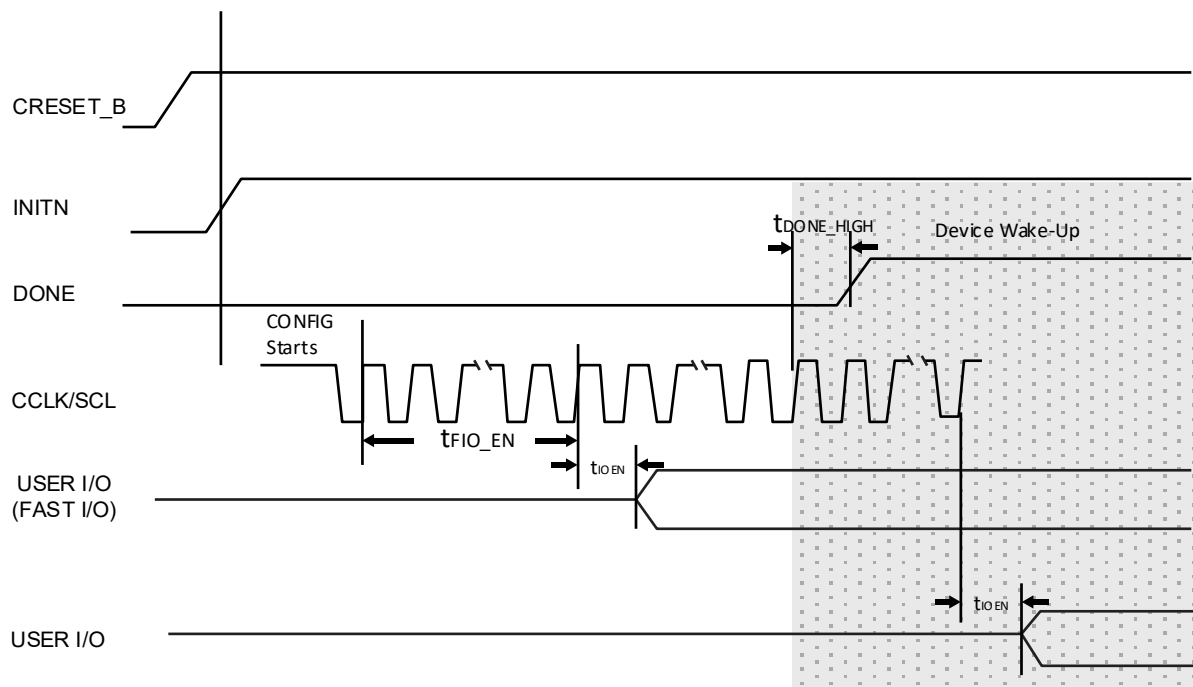


Figure 3.19. Slave SPI/I2C/I3C Wake-Up Timing

3.29. JTAG Port Timing Specifications

Over recommended operating conditions.

Table 3.45. JTAG Port Timing Specifications

Symbol	Parameter	Min	Typ.	Max	Units
f_{MAX}	TCK clock frequency	—	—	25	MHz
t_{BTCPH}	TCK clock pulse width high	20	—	—	ns
t_{BTCPL}	TCK clock pulse width low	20	—	—	ns
t_{BTS}	TCK TAP setup time	5	—	—	ns
t_{BTH}	TCK TAP hold time	5	—	—	ns
t_{BTRF}	TAP controller TDO rise/fall time ¹	1000	—	—	mV/ns
t_{BTCO}	TAP controller falling edge of clock to valid output	—	—	14	ns
$t_{BTCODIS}$	TAP controller falling edge of clock to valid disable	—	—	14	ns
t_{BTCOEN}	TAP controller falling edge of clock to valid enable	—	—	14	ns
t_{BTCRS}	BSCAN test capture register setup time	8	—	—	ns
t_{BTCRH}	BSCAN test capture register hold time	25	—	—	ns
t_{BUTCO}	BSCAN test update register, falling edge of clock to valid output	—	—	25	ns
$t_{BTUODIS}$	BSCAN test update register, falling edge of clock to valid disable	—	—	25	ns
$t_{BTUPOEN}$	BSCAN test update register, falling edge of clock to valid enable	—	—	25	ns

Note:

1. Based on default I/O setting of slow slew rate.


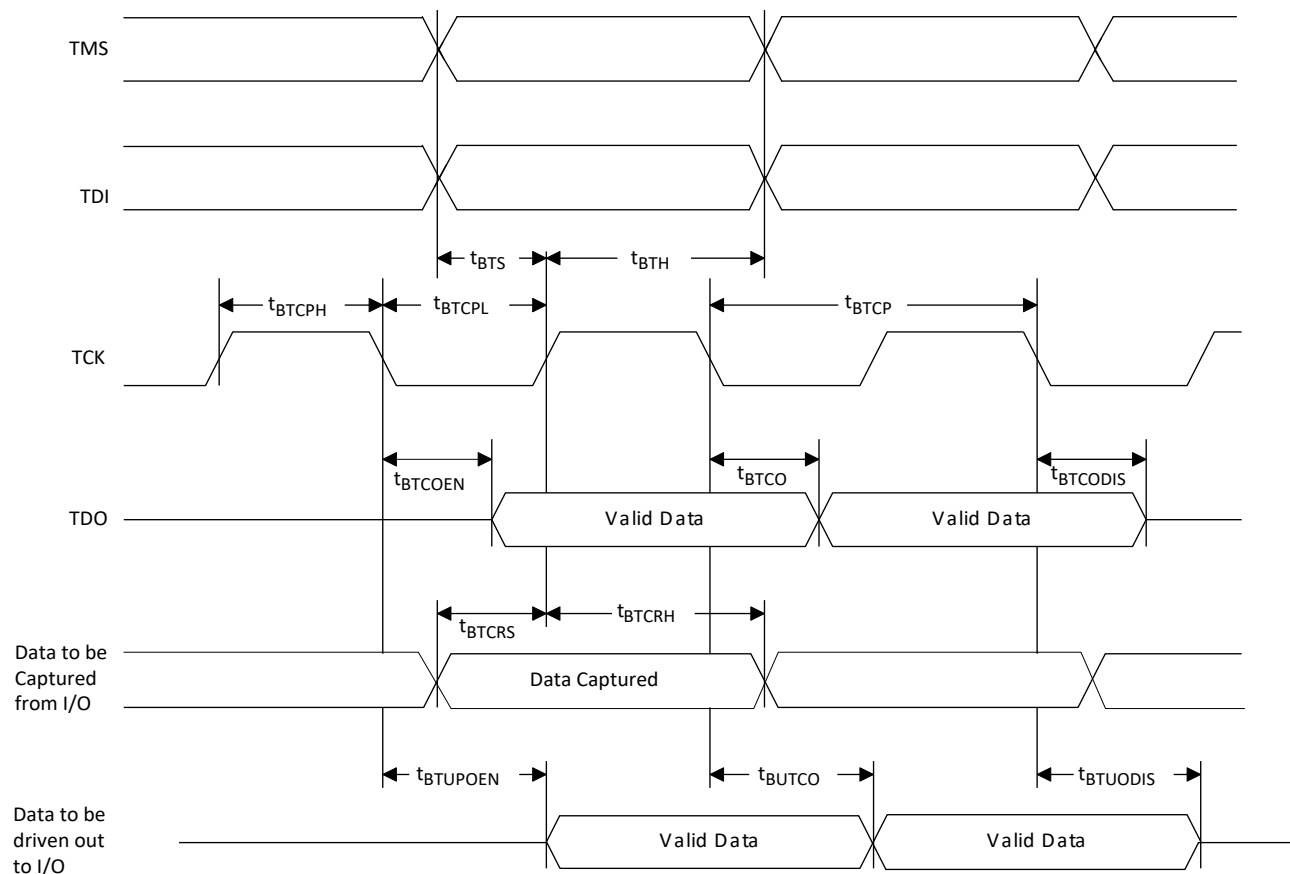


Figure 3.20. JTAG Port Timing Waveforms

3.30. Switching Test Conditions

Figure 3.21 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are listed in Table 3.46.

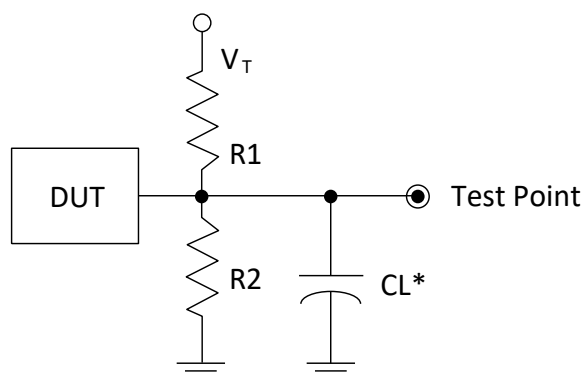

*CL Includes Test Fixture and Probe Capacitance

Figure 3.21. Output Test Load, LVTTTL and LVCMOS Standards

Table 3.46. Test Fixture Required Components, Non-Terminated Interfaces

Test Condition	R ₁	R ₂	C _L	Timing Ref.	V _T
LVTTTL and other LVCMOS settings (L to H, H to L)	∞	∞	0 pF	LVCMOS 3.3 = 1.5 V	—
				LVCMOS 2.5 = V _{CCIO} /2	—
				LVCMOS 1.8 = V _{CCIO} /2	—
				LVCMOS 1.5 = V _{CCIO} /2	—
				LVCMOS 1.2 = V _{CCIO} /2	—
LVCMOS 2.5 I/O (Z to H)	∞	1 M Ω	0 pF	V _{CCIO} /2	—
LVCMOS 2.5 I/O (Z to L)	1 M Ω	∞	0 pF	V _{CCIO} /2	V _{CCIO}
LVCMOS 2.5 I/O (H to Z)	∞	100	0 pF	V _{OH} - 0.10	—
LVCMOS 2.5 I/O (L to Z)	100	∞	0 pF	V _{OL} + 0.10	V _{CCIO}

Note: Output test conditions for all other interfaces are determined by the respective standards.

4. DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial

All specifications in this section are characterized within recommended operating conditions unless otherwise specified.

4.1. Absolute Maximum Ratings

Table 4.1. Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Unit
V_{CC}, V_{CCECLK}	Supply Voltage	-0.5	1.10	V
$V_{CCAUX}, V_{CCAUXA}, V_{CCAUXH3}, V_{CCAUXH4}, V_{CCAUXH5}, V_{CCAUXH6}$	Supply Voltage	-0.5	1.98	V
$V_{CCIO0, 1, 2, 6, 7}$	I/O Supply Voltage (LFMXO5-55T and LFMXO5-100T)	-0.5	3.63	V
$V_{CCIO3, 4, 5}$	I/O Supply Voltage (LFMXO5-55T and LFMXO5-100T)	-0.5	1.98	V
$V_{CCIO0, 1, 2, 3, 4, 7, 8, 9, 11}$	I/O Supply Voltage (LFMXO5-35/T and LFMXO5-65/T)	-0.5	3.63	V
$V_{CCIO5, 6}$	I/O Supply Voltage (LFMXO5-35/T, LFMXO5-65/T)	-0.5	1.98	V
$V_{CCPLLSD}^*$	SERDES Block PLL Supply Voltage	-0.5	1.98	V
V_{CCSD}^*	SERDES Supply Voltage	-0.5	1.10	V
V_{CCSDCK}	SERDES Clock Buffer Supply Voltage	-0.5	1.10	V
$V_{CCADC18}$	ADC Block 1.8 V Supply Voltage	-0.5	1.98	V
$V_{CCAUXSDQ}^*$	SERDES AUX Supply Voltage	-0.5	1.98	V
—	Input or I/O Voltage Applied, Bank 0, Bank 1, Bank 2, Bank 6, Bank 7	-0.5	3.63	V
—	Input or I/O Voltage Applied, Bank 3, Bank 4, Bank 5	-0.5	1.98	V
T_A	Storage Temperature (Ambient)	-65	150	°C
T_J	Junction Temperature	—	+125	°C

Notes:

- Stress above those listed under the *Absolute Maximum Ratings* may cause permanent damage to the device. Functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.
- Compliance with the Lattice [Thermal Management](#) document is required.
- All voltages referenced to GND.
- All V_{CCAUX} should be connected to PCB.

4.2. Recommended Operating Conditions^{1, 2, 3}

Table 4.2. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
V_{CC}, V_{CCECLK}	Core Supply Voltage	$V_{CC} = 1.0$	0.95	1.00	1.05	V
V_{CCAUX}	Auxiliary Supply Voltage	WRIO banks: Bank 0, Bank 1, Bank 2, Bank 6, Bank 7 (LFMXO5-55T and LFMXO5-100T), Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8, Bank 9,	1.71	1.80	1.89	V

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
		Bank 11 (LFMXO5-35/T and LFMXO5-65/T)				
V _{CCAUXH3/4/5/6}	Auxiliary Supply Voltage	HPIO banks: Bank 3, Bank 4, Bank 5 (LFMXO5-55T and LFMXO5-100T), Bank 5/6 (LFMXO5-35/Tand LFMXO5-65/T)	1.71	1.80	1.89	V
V _{CCAUXA}	Auxiliary Supply Voltage for core logic	—	1.71	1.80	1.89	V
V _{CCIO}	I/O Driver Supply Voltage	V _{CCIO} = 3.3 V, WRIO banks	3.135	3.30	3.465	V
		V _{CCIO} = 2.5 V, WRIO banks	2.375	2.50	2.625	V
		V _{CCIO} = 1.8 V, All Banks except Bank 0 (LFMXO5-55T and LFMXO5-100T), or Bank 1 (LFXO5-35T/T and LFMXO5-65/T)	1.71	1.80	1.89	V
		V _{CCIO} = 1.5 V, All Banks except Bank 0 (LFMXO5-55T and LFMXO5-100T) or Bank 1 (LFMXO5-35/T and LFMXO5-65/T) ⁴	1.425	1.50	1.575	V
		V _{CCIO} = 1.35 V, All Banks except Bank 0 (LFMXO5-55T and LFMXO5-100T) or Bank 1 (LFMXO5-35/T and LFMXO5-65/T) ⁴ (For DDR3L Only)	1.2825	1.35	1.4175	V
		V _{CCIO} = 1.2 V, All Banks except Bank 0 (LFMXO5-55T and LFMXO5-100T) or Bank 1 (LFMXO5-35/T and LFMXO5-65/T) ⁴	1.14	1.20	1.26	V
		V _{CCIO} = 1.0 V, HPIO banks	0.95	1.00	1.05	V
ADC External Power Supplies						
V _{CCADC18}	ADC 1.8 V Power Supply	—	1.71	1.80	1.89	V
SERDES Block External Power Supplies						
V _{CCSD} *	Supply Voltage for SERDES Block and SerDes I/O	—	0.95	1.00	1.05	V
V _{CCSDCK}	Supply Voltage for SERDES Clock Buffer	—	0.95	1.00	1.05	V
V _{CCPLLSD} *	SERDES Block PLL Supply Voltage	—	1.71	1.80	1.89	V
V _{CCAUXSDQ} *	SERDES Block Auxiliary Supply Voltage	—	1.71	1.80	1.89	V
Operating Temperature						
t _{JCOM}	Junction Temperature, Commercial Operation	—	0	—	85	°C
t _{JIND}	Junction Temperature, Industrial Operation	—	−40	—	100	°C

Notes:

- For correct operation, all supplies must be held in their valid operation voltage range.
- All supplies with same voltage should be from the same voltage source. Proper isolation filters are needed to properly isolate noise from each other.

3. Common supply rails must be tied together.
4. JTAG, SSPI, I2C, and I3C (Bank 2) ports are supported for $V_{CCIO} = 1.8\text{ V}$ to 3.3 V .

4.3. Power Supply Ramp Rates

Table 4.3. Power Supply Ramp Rates

Symbol	Parameter	Min	Typ	Max	Unit
t_{RAMP}	Power Supply ramp rates for all supplies ^{1,2,3,4}	0.1	—	50	V/ms
$t_{RAMP_VCCIOCFG}$	Power Supply ramp rates for V_{CCIO0} (LFMXO5-55T and LFMXO5-100T) or V_{CCIO1} (LFMXO5-35/T and LFMXO5-65T) supply ^{1,2,3,5}	0.9	—	50	V/ms

Notes:

1. Assumes monotonic ramp rates.
2. All supplies need to be in the operating range as defined in [Recommended Operating Conditions](#) when the device has completed configuration and entering into User Mode. Supplies that are not in the operating range needs to be adjusted to faster ramp rate, or you have to delay configuration or wake up.
3. When WRIO must remain at a logic low level during power rail ramp-up, and V_{CCIO} is not sequenced last, the corresponding V_{CCIO} t_{RAMP} must be 4.4 V/ms or less. Refer to the [sysI/O Considerations](#) section for more information.
4. Includes V_{CCIO0} (LFMXO5-55T and LFMXO5-100T) or V_{CCIO1} (LFMXO5-35/T and LFMXO5-65T) when the respective rail achieves its minimum Recommended Operating Condition prior to V_{CC} ramp-up.
5. Required when V_{CCIO0} (LFMXO5-55T and LFMXO5-100T) or V_{CCIO1} (LFMXO5-35/T and LFMXO5-65T) is powered up simultaneously with or after V_{CC} .

4.4. Power up Sequence

Power-On-Reset (POR) puts the MachXO5-NX device into a reset state. There is no power up sequence required for the MachXO5-NX device.

In applications where the WRIO must remain at a logic low level during power rail ramp-up and before POR deactivation, refer to the [sysI/O Considerations](#) section.

Note: Dual-function sysCONFIG pins with configuration phase pull-up resistors will transition *high* during this period and are excluded from this guidance. Refer to the sysCONFIG Pins section of the [MachXO5-NX Programming and Configuration User Guide \(FPGA-TN-02271\)](#) for the complete list of dual-function sysCONFIG pins.

Table 4.4. Power-On Reset

Symbol	Parameter		Min	Typ	Max	Unit
V _{PORUP}	Power-On-Reset ramp-up trip point (Monitoring V _{CC} , V _{CCAUX} , V _{CCIO0} , V _{CCIO1} , and V _{CCIO2})	V _{CC}	0.73	—	0.83	V
		V _{CCAUX}	1.34	—	1.62	V
		V _{CCIO0} , V _{CCIO1} (LFMX05-55T and LFMX05-100T)	0.89	—	1.05	V
		V _{CCIO1} , V _{CCIO2} (LFMX05-35/T and LFMX05-65T)				
V _{PORDN}	Power-On-Reset ramp-up trip point (Monitoring V _{CC} and V _{CCAUX})	V _{CC}	0.51	—	0.81	V
		V _{CCAUX}	1.38	—	1.59	V

4.5. On-Chip Programmable Termination

The MachXO5-NX devices support a variety of programmable on-chip terminations options, including:

- Dynamically switchable Single-Ended Termination with programmable resistor values of 40 Ω , 50 Ω , 60 Ω , or 75 Ω .
- Common mode termination of 100 Ω for differential inputs.

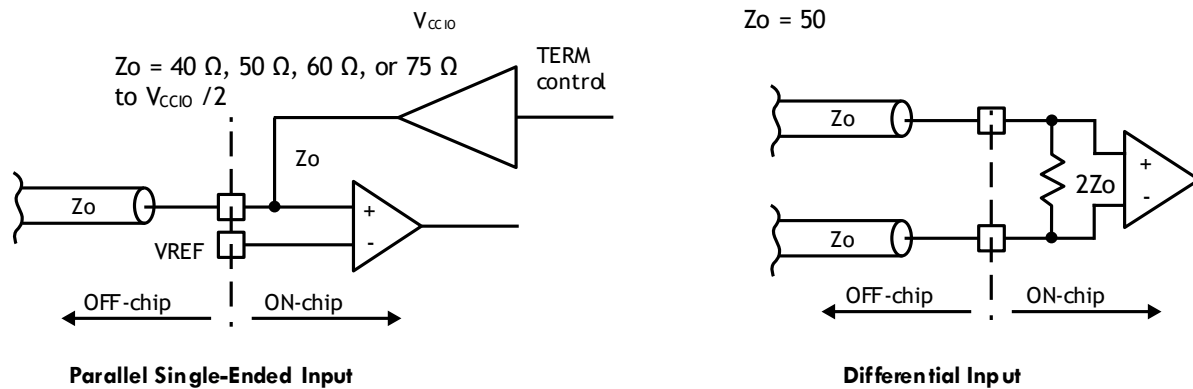


Figure 4.1. On-Chip Termination

See Table 4.5 for termination options for input modes.

Table 4.5. On-Chip Termination Options for Input Modes

IO_TYPE	Differential Termination Resistor ^{1, 2}	Terminate to $V_{CCIO}/2$ ^{1, 2}
subLVDS	100, OFF	OFF
SLVS	100, OFF	OFF
MIPI_DPHY	100	OFF
HSTL15D_I	100, OFF	OFF
SSTL15D_I	100, OFF	OFF
SSTL135D_I	100, OFF	OFF
HSUL12D	100, OFF	OFF
LVC MOS15H	OFF	OFF
LVC MOS12H	OFF	OFF
LVC MOS10H	OFF	OFF
LVC MOS18H	OFF	OFF, 40, 50, 60, 75
HSTL15_I	OFF	50
SSTL15_I	OFF	OFF, 40, 50, 60, 75
SSTL135_I	OFF	OFF, 40, 50, 60, 75
HSUL12	OFF	OFF, 40, 50, 60, 75
LVSTL_I	OFF	OFF, 40, 48, 60, 80, 120
LVSTL_II	OFF	OFF, 80, 120

Notes:

1. Single-ended Terminate Resistor (to ground for LPDDR4, to $V_{CCIO}/2$ for all other non-LPDDR4) and Differential Resistor when turned on can only have one setting per bank. Only bottom banks have this feature.
2. Use of Single-ended Terminate Resistor (to ground for LPDDR4, to $V_{CCIO}/2$ for all other non-LPDDR4) and Differential Termination Resistor are mutually exclusive in an I/O bank.
3. Tolerance for single-ended termination resistor is -10/60%, while for differential termination resistor is -15/15%.

Refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for on-chip termination usage and value ranges.

4.6. Hot Socketing Specifications

Table 4.6. Hot Socketing Specifications for GPIO

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{DK}	Input or I/O Leakage Current for Wide Range I/O (excluding INITN/DONE)	$0 < V_{IN} < V_{IH(max)}$ $0 < V_{CC} < V_{CC(max)}$ $0 < V_{CCIO} < V_{CCIO(max)}$ $0 < V_{CCAUX} < V_{CCAUX(max)}$	-1.5	—	1.5	mA

Notes:

- I_{DK} is additive to I_{PU} , I_{PD} , or I_{BH} .
- Hot socket specification defines when the hot socketed device's junction temperature is at 85 °C or below. When the hot socketed device's junction temperature is above 85 °C, the I_{DK} current can exceed the above spec.
- Going beyond the hot socketing ranges specified here will cause exponentially higher Leakage currents and potential reliability issues. A total of 64mA per 8 I/O should not be exceeded.

4.7. Programming/Erase Specifications

Table 4.7. Programming/Erase Specifications

Symbol	Parameter	Min	Max.	Units
$N_{PROGCYC}$	Flash Programming cycles per $t_{RETENTION}$	—	10,000	Cycles
	Flash Write/Erase cycles	—	100,000	
$t_{RETENTION}$	Data retention at 100 °C junction temperature	20	—	Years
	Data retention at 85 °C junction temperature	>20	—	

Note:

A Write/Erase cycle is defined as any number of writes over time followed by one erase cycle.

4.8. ESD Performance

Refer to the MachXO5-NX Product Family Qualification Summary for complete qualification data, including ESD performance.

4.9. DC Electrical Characteristics

Table 4.8. DC Electrical Characteristics – Wide Range (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IL}, I_{IH}^1	Input or I/O Leakage current (Commercial/Industrial)	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	10	μA
I_{IH}^2	Input or I/O Leakage current	$V_{CCIO} \leq V_{IN} \leq V_{IH(max)}$	—	—	100	μA
I_{PU}	I/O Weak Pull-up Resistor Current	$0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$	-30	—	-150	μA
I_{PD}	I/O Weak Pull-down Resistor Current	$V_{IL(max)} \leq V_{IN} \leq V_{CCIO}$	30	—	150	μA
I_{BHLS}	Bus Hold Low Sustaining Current	$V_{IN} = V_{IL(max)}$	30	—	—	μA
I_{BHHS}	Bus Hold High Sustaining Current	$V_{IN} = 0.7 \times V_{CCIO}$	-30	—	—	μA
I_{BHLO}	Bus hold low Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	150	μA
I_{BHHO}	Bus hold high Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	-150	μA
V_{BHT}	Bus Hold Trip Points	—	$V_{IL(max)}$	—	$V_{IH(min)}$	V

Notes:

- Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.
- The input leakage current I_{IH} is the worst case input leakage per GPIO when the pad signal is high and also higher than the bank V_{CCIO} . This is considered a mixed mode input.

Table 4.9. DC Electrical Characteristics – High Speed (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{IL}, I_{IH}^1	Input or I/O Leakage	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	10	μA
I_{PU}	I/O Weak Pull-up Resistor Current	$0 \leq V_{IN} \leq 0.7 \times V_{CCIO}$	–30	—	–150	μA
I_{PD}	I/O Weak Pull-down Resistor Current	$V_{IL} (max) \leq V_{IN} \leq V_{CCIO}$	30	—	150	μA
I_{BHLS}	Bus Hold Low Sustaining Current	$V_{IN} = V_{IL} (max)$	30	—	—	μA
I_{BHHS}	Bus Hold High Sustaining Current	$V_{IN} = 0.7 \times V_{CCIO}$	–30	—	—	μA
I_{BHLO}	Bus hold low Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	150	μA
I_{BHHO}	Bus hold high Overdrive Current	$0 \leq V_{IN} \leq V_{CCIO}$	—	—	–150	μA
V_{BHT}	Bus Hold Trip Points	—	$V_{IL} (max)$	—	$V_{IH} (min)$	V

Note:

1. Input or I/O leakage current is measured with the pin configured as an input or as an I/O with the output tri-stated. Bus Maintenance circuits are disabled.

Table 4.10. Capacitors – Wide Range (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_1^1	I/O Capacitance	$V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf
C_2^1	Dedicated Input Capacitance	$V_{CCIO} = 3.3 V, 2.5 V, 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf

Note:

1. $T_A 25^\circ C, f = 1.0 \text{ MHz}$.

Table 4.11. Capacitors – High Performance (Over Recommended Operating Conditions)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_1^1	I/O Capacitance	$V_{CCIO} = 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf
C_2^1	Dedicated Input Capacitance	$V_{CCIO} = 1.8 V, 1.5 V, 1.2 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCIO} + 0.2 V$	—	6	—	pf
C_3^1	SERDES I/O Capacitance	$V_{CCSD}^* = 1.0 V, V_{CC} = typ., V_{IO} = 0 \text{ to } V_{CCSD}^* + 0.2 V$	—	5	—	pf

Note:

1. $T_A 25^\circ C, f = 1.0 \text{ MHz}$.

Table 4.12. Single Ended Input Hysteresis – Wide Range (Over Recommended Operating Conditions)

IO_TYPE	V_{CCIO}	TYP Hysteresis
LVC MOS33	3.3 V	250 mV
LVC MOS25	3.3 V	200 mV
	2.5 V	250 mV
LVC MOS18	1.8 V	180 mV
LVC MOS15	1.5 V	50 mV
LVC MOS12	1.2 V	0
LVC MOS10	1.2 V	0

Table 4.13. Single Ended Input Hysteresis – High Performance (Over Recommended Operating Conditions)

IO_TYPE	V _{CCIO}	TYP Hysteresis
LVC MOS18H	1.8 V	180 mV
LVC MOS15H	1.8 V	50 mV
	1.5 V	150 mV
LVC MOS12H	1.2 V	0
LVC MOS10H	1.0 V	0
MIPI-LP-RX	1.2 V	>25 mV

4.10. Supply Currents

For estimating and calculating current, use Power Calculator in Lattice Design Software.

This operating and peak current is design dependent, and can be calculated in Lattice Design Software. Some blocks can be placed into low current standby modes. Refer to [Power Management and Calculation for Certus-NX, CertusPro-NX, and MachXO5-NX Devices \(FPGA-TN-02257\)](#).

4.11. sysI/O Recommended Operating Conditions

Table 4.14. sysI/O Recommended Operating Conditions

Standard	Supported Banks		V _{CCIO} (Input)	V _{CCIO} (Output)
	LFMXO5-55T and LFMXO5-100T	LFMXO5-35/T and LFMXO5-65/T	Typ.	Typ.
Single-Ended				
LVC MOS33	0, 1, 2, 6, 7	0, 1, 2, 3, 4, 7, 8, 9, 11	3.3	3.3
LVTTL33	0, 1, 2, 6, 7	0, 1, 2, 3, 4, 7, 8, 9, 11	3.3	3.3
LVC MOS25 ^{1, 2}	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	2.5, 3.3	2.5
LVC MOS18 ^{1, 2}	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	1.2, 1.5, 1.8, 2.5, 3.3	1.8
LVC MOS18H	3, 4, 5	5,6	1.8	1.8
LVC MOS15 ^{1, 2}	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	1.2, 1.5, 1.8, 2.5, 3.3	1.5
LVC MOS15H ¹	3, 4, 5	5,6	1.5, 1.8	1.5
LVC MOS12 ^{1, 2}	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	1.2, 1.5, 1.8, 2.5, 3.3	1.2
LVC MOS12H ¹	3, 4, 5	5,6	1.2, 1.35 ⁷ , 1.5, 1.8	1.2
LVC MOS10 ¹	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	1.2, 1.5, 1.8, 2.5, 3.3	—
LVC MOS10H ¹	3, 4, 5	5,6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8	1.0
LVC MOS10R ¹	3, 4, 5	5,6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8	—
SSTL135_I, SSTL135_II ³	3, 4, 5	5,6	1.35 ⁷	1.35
SSTL15_I, SSTL15_II ³	3, 4, 5	5,6	1.5 ⁸	1.5 ⁸
HSTL15_I ³	3, 4, 5	5,6	1.5 ⁸	1.5 ⁸
HSUL12 ³	3, 4, 5	5,6	1.2	1.2
LVSTL_I ⁹	3, 4, 5	5,6	1.1	1.1
LVSTL_II ⁹	3, 4, 5	5,6	1.1	1.1
MIPI D-PHY LP Input ⁶	3, 4, 5	5,6	1.2	1.2
Differential				
LVDS	3, 4, 5	5,6	1.2, 1.35, 1.5, 1.8	1.8
LVDSE ⁵	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	—	2.5
subLVDS	3, 4, 5	5,6	1.2, 1.35, 1.5, 1.8	—
subLVDSE ⁵	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	—	1.8

Standard	Supported Banks		V _{CCIO} (Input)	V _{CCIO} (Output)
	LFMXO5-55T and LFMXO5-100T	LFMXO5-35/T and LFMXO5-65/T	Typ.	Typ.
subLVDSEH ⁵	3, 4, 5	5,6	—	1.8
SLVS ⁶	3, 4, 5	5,6	1.0, 1.2, 1.35 ⁷ , 1.5, 1.8 ⁴	1.2, 1.35 ⁷ , 1.5, 1.8 ⁴
MIPI D-PHY ⁶	3, 4, 5	5,6	1.2	1.2
LVCMS33D ⁵	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	—	3.3
LVTTL33D ⁵	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	—	3.3
LVCMS25D ⁵	1, 2, 6, 7	0, 2, 3, 4, 7, 8, 9, 11	—	2.5
SSTL135D_I, SSTL135D_II ⁵	3, 4, 5	5,6	—	1.35 ⁷
SSTL15D_I, SSTL15D_II ⁵	3, 4, 5	5,6	—	1.5
HSTL15D_I ⁵	3, 4, 5	5,6	—	1.5
HSUL12D ⁵	3, 4, 5	5,6	—	1.2
LVSTLD_I ⁵	3, 4, 5	5,6	—	1.1
LVSTLD_II ⁵	3, 4, 5	5,6	—	1.1

Notes:

- Single-ended input can mix into I/O Banks with V_{CCIO} different from the standard requires due to some of these input standards use internal supply voltage source (V_{CC}, V_{CCAUX}) to power the input buffer, which makes them to be independent of V_{CCIO} voltage. For more details, please refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#). The following is a brief guideline to follow:
 - Weak pull-up on the I/O must be set to OFF.
 - HPIO bank I/O can only mix into banks with V_{CCIO} higher than the pin standard, due to clamping diode on the pin in these banks. WRIO bank I/O do not have this restriction.
 - LVCMS25 uses V_{CCIO} supply on input buffer in WRIO banks. It can be supported with V_{CCIO} = 3.3 V to meet the V_{IH} and V_{IL} requirements, but there is additional current drawn on V_{CCIO}. Hysteresis has to be disabled when using 3.3 V supply voltage.
 - LVCMS15 uses V_{CCIO} supply on input buffer in HPIO banks. It can be supported with V_{CCIO} = 1.8 V to meet the V_{IH} and V_{IL} requirements, but there is additional current drawn on V_{CCIO}.
- Single-ended LVCMS inputs can mixed into I/O Banks with different V_{CCIO}, providing weak pull-up is not used. For additional information on Mixed I/O in Bank V_{CCIO}, refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#).
- These inputs use differential input comparator in HPIO banks. The differential input comparator uses V_{CCAUXH} power supply. These inputs require the V_{REF} pin to provide the reference voltage in the Bank. Refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- All differential inputs use differential input comparator in HPIO banks. The differential input comparator uses V_{CCAUXH} power supply. There is no differential input signaling supported in WRIO banks.
- These outputs are emulating differential output pair with single-ended output drivers with true and complement outputs driving on each of the corresponding true and complement output pair pins. The common mode voltage, V_{CM}, is ½ × V_{CCIO}. Refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.
- Soft MIPI D-PHY HS using sys/O is supported with SLVS input and output that can be placed in banks with V_{CCIO} voltage shown in SLVS. D-PHY with HS and LP modes supported needs to be placed in banks with V_{CCIO} voltage = 1.2 V. Soft MIPI D-PHY LP input and output using sys/O are supported with LVCMS12.
- V_{CCIO} = 1.35 V is only supported in HPIO banks, for use with DDR3L interface in the bank. These Input and Output standards can fit into the same bank with the V_{CCIO} = 1.35 V.
- LVCMS15 input uses V_{CCIO} supply voltage. If V_{CCIO} is 1.8 V, the DC levels for LVCMS15 are still met, but there could be increase in input buffer current.
- These inputs use differential input comparator in HPIO banks. The differential input comparator uses V_{CCAUXH} power supply. These inputs require the V_{REF} pin to provide the reference voltage in the Bank. Refer to [sys/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#) for details.

4.12. sysI/O Single-Ended DC Electrical Characteristics³

Table 4.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions)

Input/Output Standard	V_{IL}^1		V_{IH}^1		$V_{OL} \text{ Max (V)}$	$V_{OH} \text{ Min}^2 \text{ (V)}$	$I_{OL} \text{ (mA)}$	$I_{OH} \text{ (mA)}$
	Min (V)	Max (V)	Min (V)	Max (V)				
LVTT133 LVCMOS33	—	0.8	2.0	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	2, 4, 8, 12, 16, "50RS" ³	-2, -4, -8, -12, -16, "50RS" ³
LVCMOS25	—	0.7	1.7	3.465 ⁵	0.4	$V_{CCIO} - 0.45$	2, 4, 8, 10, "50RS" ³	-2, -4, -8, -10, "50RS" ³
LVCMOS18	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.45$	2, 4, 8, "50RS" ³	-2, -4, -8, "50RS" ³
LVCMOS15	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	2, 4	-2, -4
LVCMOS12	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	0.4	$V_{CCIO} - 0.4$	2, 4	-2, -4
LVCMOS10	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	3.465 ⁵	No O/P Support			

Notes:

1. V_{CCIO} for input level refers to the supply rail level associated with a given input standard.
2. V_{CCIO} for the output levels refer to the V_{CCIO} of the CertusPro-NX device.
3. Selecting "50RS" in driver strength is to select 50 Ω series impedance driver.
4. For electro-migration, the combined DC current sourced or sunk by I/O pads between two consecutive V_{CCIO} or GND pad connections, or between the last V_{CCIO} or GND in an I/O bank and the end of an I/O bank, as shown in the Logic Signal Connections table (also shown as I/O grouping) shall not exceed a maximum of $n \times 8$ mA. n is the number of I/O pads between the two consecutive bank V_{CCIO} or GND connections or between the last V_{CCIO} and GND in a bank and the end of a bank. I/O Grouping can be found in the Data Sheet Pin Summary Tables, which can also be generated from the Lattice Radiant software.
5. If the input clamp is OFF, V_{IH} (Max) in WRIO banks can go up to 3.465 V. Otherwise, the input voltage cannot be higher than $V_{CCIO} + 0.3$ V.

Table 4.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions)³

Input/Output Standard	V_{IL}^1		V_{IH}^1		$V_{OL} \text{ Max (V)}$	$V_{OH} \text{ Min}^2 \text{ (V)}$	$I_{OL} \text{ (mA)}$	$I_{OH} \text{ (mA)}$
	Min (V)	Max (V)	Min (V)	Max (V)				
LVCMOS18H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.45$	2, 4, 8, 12, "50RS" ³	-2, -4, -8, -12, "50RS" ³
LVCMOS15H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.4$	2, 4, 8, "50RS" ³	-2, -4, -8, "50RS" ³
LVCMOS12H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	0.4	$V_{CCIO} - 0.4$	2, 4, 8, "50RS" ³	-2, -4, -8, "50RS" ³
LVCMOS10H	—	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.3$	$0.27 \times V_{CCIO}$	$0.75 \times V_{CCIO}$	2, 4	-2, -4
SSTL15_I	—	$V_{REF} - 0.10$	$V_{REF} + 0.1$	$V_{CCIO} + 0.3$	0.30	$V_{CCIO} - 0.30$	7.5	-7.5
SSTL15_II	—	$V_{REF} - 0.10$	$V_{REF} + 0.1$	$V_{CCIO} + 0.3$	0.30	$V_{CCIO} - 0.30$	8.8	-8.8
HSTL15_I	—	$V_{REF} - 0.10$	$V_{REF} + 0.1$	$V_{CCIO} + 0.3$	0.40	$V_{CCIO} - 0.40$	8	-8
SSTL135_I	—	$V_{REF} - 0.09$	$V_{REF} + 0.09$	$V_{CCIO} + 0.3$	0.27	$V_{CCIO} - 0.27$	6.75	-6.75
SSTL135_II	—	$V_{REF} - 0.09$	$V_{REF} + 0.09$	$V_{CCIO} + 0.3$	0.27	$V_{CCIO} - 0.27$	8	-8
LVCMOS10R	—	$V_{REF} - 0.10$	$V_{REF} + 0.10$	$V_{CCIO} + 0.3$	—	—	—	—
HSUL12	—	$V_{REF} - 0.10$	$V_{REF} + 0.10$	$V_{CCIO} + 0.3$	0.3	$V_{CCIO} - 0.3$	8.0, 7.5, 6.25, 5	-8.0, -7.5, -6.25, -5
LVSTL_I	-0.2	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.2$	$0.1 \times V_{CCIO}$	$0.3 \times V_{CCIO}$	2, 4, 6, 8, 10	-2, -4, -6, -8, -10

Input/Output Standard	V_{IL}^1		V_{IH}^1		$V_{OL} \text{ Max (V)}$	$V_{OH} \text{ Min}^2 \text{ (V)}$	$I_{OL} \text{ (mA)}$	$I_{OH} \text{ (mA)}$
	Min (V)	Max (V)	Min (V)	Max (V)				
LVSTL_II	-0.2	$0.35 \times V_{CCIO}$	$0.65 \times V_{CCIO}$	$V_{CCIO} + 0.2$	$0.1 \times V_{CCIO}$	$0.36 \times V_{CCIO}$	4, 6	-4, -6

Notes:

1. V_{CCIO} for input level refers to the supply rail level associated with a given input standard or the upstream driver V_{CCIO} rail levels.
2. V_{CCIO} for the output levels refer to the V_{CCIO} of the MachXO5-NX device.
3. Select "50RS" in driver strength is selecting the 50Ω series impedance driver.
4. For electro-migration, the combined DC current sourced or sunk by I/O pads between two consecutive V_{CCIO} or GND pad connections, or between the last V_{CCIO} or GND in an I/O bank and the end of an I/O bank, as shown in the Logic Signal Connections table (also shown as I/O grouping) shall not exceed a maximum of $n \times 8 \text{ mA}$. n is the number of I/O pads between the two consecutive bank V_{CCIO} or GND connections or between the last V_{CCIO} and GND in a bank and the end of a bank. I/O Grouping can be found in the Data Sheet Pin Summary Tables, which can also be generated from the Lattice Radiant software.

Table 4.17. I/O Resistance Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
50RS	Output Drive Resistance when 50RS Drive Strength Selected	$V_{CCIO} = 1.8 \text{ V}, 2.5 \text{ V}, \text{ or } 3.3 \text{ V}$	—	50	—	Ω
R_{DIFF}	Input Differential Termination Resistance	HPIO banks for I/O selected to be differential	—	100	—	Ω
SE Input Termination	Input Single Ended Termination Resistance	HPIO banks for I/O selected to be Single Ended	36	40	64	Ω
			46	50	80	
			56	60	96	
			71	75	120	

Table 4.18. VIN Maximum Overshoot/Undershoot Allowance – Wide Range^{1,2}

AC Voltage Overshoot	% of UI at -40 °C to 100 °C	AC Voltage Undershoot	% of UI at -40 °C to 100 °C
$V_{CCIO} + 0.4$	100.0%	-0.4	100.0%
$V_{CCIO} + 0.5$	100.0%	-0.5	44.2%
$V_{CCIO} + 0.6$	94.0%	-0.6	10.1%
$V_{CCIO} + 0.7$	21.0%	-0.7	1.3%
$V_{CCIO} + 0.8$	10.2%	-0.8	0.3%
$V_{CCIO} + 0.9$	2.5%	-0.9	0.1%

Notes:

1. The peak overshoot or undershoot voltage and the duration above $V_{CCIO} + 0.2 \text{ V}$ or below $GND - 0.2 \text{ V}$ must not exceed the values in this table.
2. For UI less than 20 μs.

Table 4.19. VIN Maximum Overshoot/Undershoot Allowance – High Performance^{1,2}

AC Voltage Overshoot	% of UI at -40 °C to 100 °C	AC Voltage Undershoot	% of UI at -40 °C to 100 °C
$V_{CCIO} + 0.5$	100.0%	-0.5	100.0%
$V_{CCIO} + 0.6$	47.3%	-0.6	47.3%
$V_{CCIO} + 0.7$	10.9%	-0.7	10.9%
$V_{CCIO} + 0.8$	2.7%	-0.8	2.7%
$V_{CCIO} + 0.9$	0.7%	-0.9	0.7%

Notes:

1. The peak overshoot or undershoot voltage and the duration above $V_{CCIO} + 0.2 \text{ V}$ or below $GND - 0.2 \text{ V}$ must not exceed the values in this table.
2. For UI less than 20 μs.

4.13. sysI/O Differential DC Electrical Characteristics

4.13.1. LVDS

LVDS input buffer on MachXO5-NX is powered by $V_{CCAUX} = 1.8\text{ V}$, and protected by the bank V_{CCIO} . Therefore, the LVDS input voltage cannot exceed the bank V_{CCIO} voltage. LVDS output buffer is powered by the Bank V_{CCIO} at 1.8 V.

LVDS can only be supported in HPIO banks. LVDS25 output can be emulated with LVDS25E in WRIO banks supporting 1.8 V V_{CCIO} . This is described in [LVDS25E \(Output Only\)](#) section.

Table 4.20. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions)¹

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{INP}, V_{INM}	Input Voltage	—	0	—	1.60 ³	V
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	0.05	—	1.55 ²	V
V_{THD}	Differential Input Threshold	Difference between the two Inputs	±100	—	—	mV
I_{IN}	Input Current	Power On or Power Off	—	—	±10	μA
V_{OH}	Output High Voltage for V_{OP} or V_{OM}	$R_T = 100\ \Omega$	—	1.425	1.60	V
V_{OL}	Output Low Voltage for V_{OP} or V_{OM}	$R_T = 100\ \Omega$	0.9	1.075	—	V
V_{OD}	Output Voltage Differential	$(V_{OP} - V_{OM}), R_T = 100\ \Omega$	250	350	450	mV
ΔV_{OD}	Change in V_{OD} Between High and Low	—	—	—	50	mV
V_{OCM}	Output Common Mode Voltage	$(V_{OP} + V_{OM})/2, R_T = 100\ \Omega$	1.125	1.25	1.375	V
ΔV_{OCM}	Change in $V_{OCM}, V_{OCM(MAX)} - V_{OCM(MIN)}$	—	—	—	50	mV
I_{SAB}	Output Short Circuit Current	$V_{OD} = 0\text{ V}$ Driver outputs shorted to each other	—	—	12	mA
ΔV_{OS}	Change in V_{OS} between H and L	—	—	—	50	mV

Notes:

1. LVDS input or output are supported in HPIO banks. LVDS input uses V_{CCAUX} on the differential input comparator, and can be located in any V_{CCIO} voltage bank. LVDS output uses V_{CCIO} on the differential output driver, and can only be located in bank with $V_{CCIO} = 1.8\text{ V}$.
2. V_{ICM} is depending on V_{ID} , input differential voltage, so the voltage on pin cannot exceed $V_{INP/INM(min/max)}$ requirements. $V_{ICM(min)} = V_{INP/INM(min)} + \frac{1}{2} V_{ID}$, $V_{ICM(max)} = V_{INP/INM(max)} - \frac{1}{2} V_{ID}$. Values in the table is based on minimum V_{ID} of +/- 100 mV.
3. V_{INP} and $V_{INM(max)}$ must be less than or equal to V_{CCIO} in all cases.

4.13.2. LVDS25E (Output Only)

Three sides of the MachXO5-NX devices, Top, Left and Right, support LVDS25 outputs with emulated complementary LVCMOS outputs in conjunction with a parallel resistor across the driver outputs. The scheme shown in [Figure 4.2](#) is one possible solution for point-to-point signals.

Table 4.21. LVDS25E DC Conditions

Parameter	Description	Typical	Unit
V_{CCIO}	Output Driver Supply (±5%)	2.50	V
Z_{OUT}	Driver Impedance	20	Ω
R_S	Driver Series Resistor (±1%)	158	Ω
R_P	Driver Parallel Resistor (±1%)	140	Ω
R_T	Receiver Termination (±1%)	100	Ω
V_{OH}	Output High Voltage	1.43	V
V_{OL}	Output Low Voltage	1.07	V
V_{OD}	Output Differential Voltage	0.35	V
V_{CM}	Output Common Mode Voltage	1.25	V
Z_{BACK}	Back Impedance	100.5	Ω

Parameter	Description	Typical	Unit
I_{DC}	DC Output Current	6.03	mA

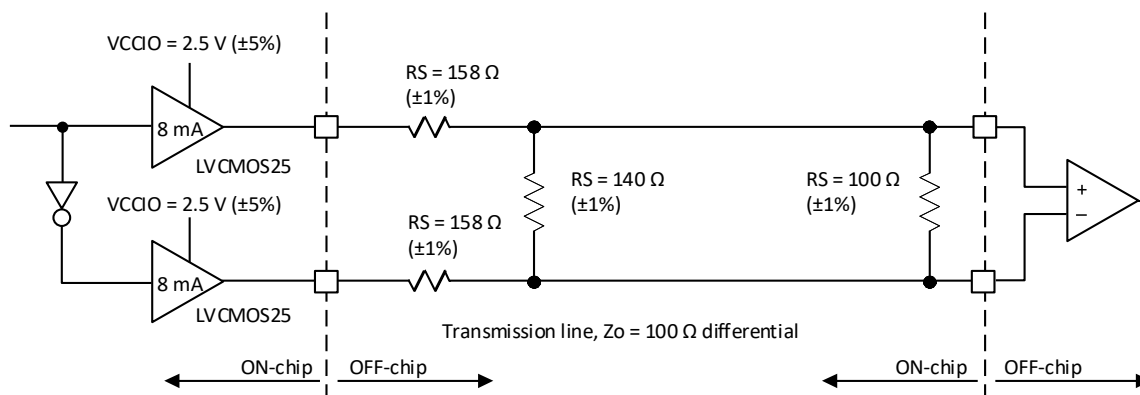


Figure 4.2. LVDS25E Output Termination Example

4.13.3. SubLVDS (Input Only)

SubLVDS is a reduced-voltage form of LVDS signaling, very similar to LVDS. It is a standard used in many camera types of applications. Similar to LVDS, the MachXO5-NX devices can support the subLVDS input signaling with the same LVDS input buffer. The output for subLVDS is implemented in subLVDSSE/subLVDSSEH with a pair of LVC MOS18 output drivers. See [SubLVDSSE/SubLVDSSEH \(Output Only\)](#) section.

Table 4.22. SubLVDS Input DC Electrical Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{ID}	Input Differential Threshold Voltage	Over V_{ICM} range	70	150	200	mV
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	0.4	0.9	1.4 ¹	V

Note:

1. $V_{ICM} + \frac{1}{2}V_{ID}$ cannot exceed the bank V_{CCIO} in all cases.

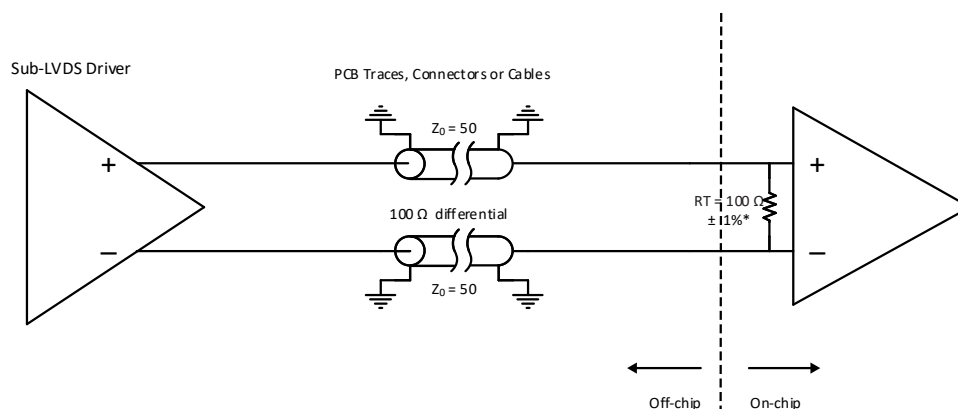


Figure 4.3. SubLVDS Input Interface

4.13.4. SubLVDSSE/SubLVDSSEH (Output Only)

SubLVDS output uses a pair of LVC MOS18 drivers with True and Complement outputs. The V_{CCIO} of the bank used for subLVDSSE or subLVDSSEH needs to be powered by 1.8 V. SubLVDSSE is for WRIO banks supporting 1.8 V V_{CCIO} , and subLVDSSEH is for HPIO banks.

Performance of the subLVDSSE/subLVDSSEH driver is limited to the performance of LVC MOS18.

Table 4.23. SubLVDS Output DC Electrical Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{OD}	Output Differential Voltage Swing	—	—	150	—	mV
V_{OCM}	Output Common Mode Voltage	Half the sum of the two Outputs	—	0.9	—	V

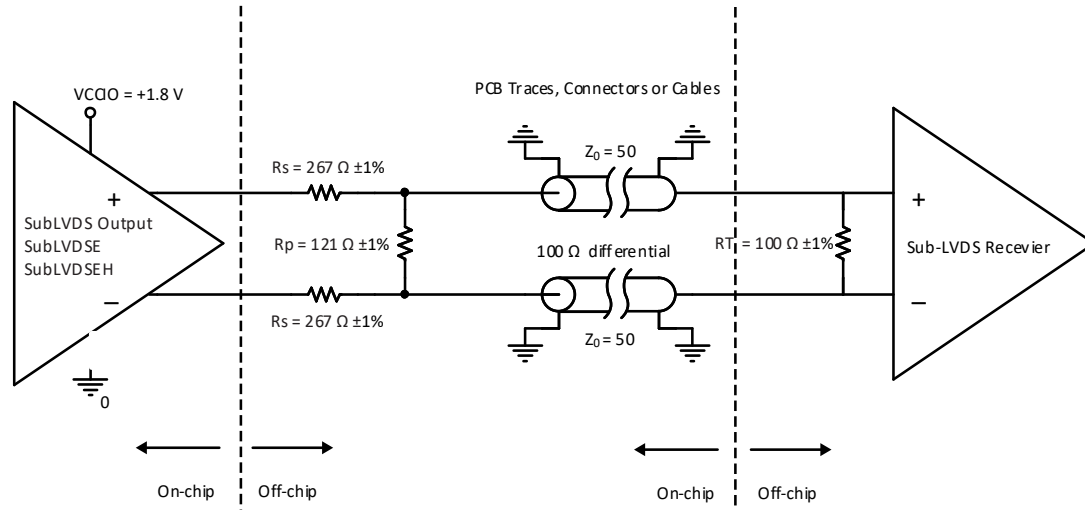


Figure 4.4. SubLVDS Output Interface

4.13.5. SLVS

Scalable Low-Voltage Signaling (SLVS) is based on a point-to-point signaling method defined in the JEDEC JESD8-13 (SLVS-400) standard. This standard evolved from the traditional LVDS standard with smaller voltage swings and a lower common-mode voltage. The 200 mV (400 mV p-p) SLVS swing contributes to a reduction in power.

The MachXO5-NX devices receive SLVS differential input with the LVDS input buffer. This LVDS input buffer is designed to cover wide input common mode range that can meet the SLVS input standard specified by the JEDEC standard.

Table 4.24. SLVS Input DC Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{ID}	Input Differential Threshold Voltage	Over V_{ICM} range	70	—	—	mV
V_{ICM}	Input Common Mode Voltage	Half the sum of the two Inputs	70	200	330	mV

The SLVS output on the MachXO5-NX device is supported with the LVDS drivers found in HPIO banks. The LVDS driver on the MachXO5-NX device is a current controlled driver. It can be configured as LVDS driver, or configured with the 100 Ω differential termination with center-tap set to V_{OCM} at 200 mV. This means the differential output driver can be placed into bank with $V_{CCIO} = 1.2$ V, 1.5 V, or 1.8 V, even if it is powered by V_{CCIO} .

Table 4.25. SLVS Output DC Characteristics (Over Recommended Operating Conditions)

Parameter	Description	Test Conditions	Min	Typ	Max	Unit
V_{CCIO}	Bank V_{CCIO}	—	−5%	1.2, 1.5, 1.8	+ 5%	V
V_{OD}	Output Differential Voltage Swing	—	140	200	270	mV
V_{OCM}	Output Common Mode Voltage	Half the sum of the two Outputs	150	200	250	mV
Z_{OS}	Single-Ended Output Impedance	—	37.5	50	62.5	Ω

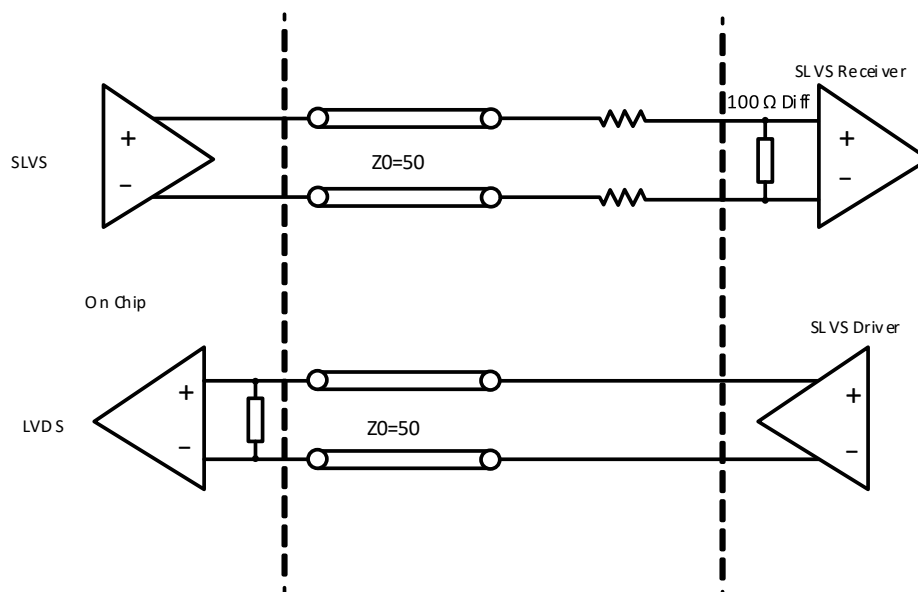


Figure 4.5. SLVS Interface

4.13.6. Soft MIPI D-PHY

When Soft D-PHY is implemented inside the FPGA logic, the I/O interface needs to use sysI/O buffers to connect to external D-PHY pins.

The MachXO5-NX sysI/O provides support of SLVS, as described in [SLVS](#) section, plus the LVCMOS12 input/output buffers together to support the High Speed (HS) and Low Power (LP) mode as defined in MIPI Alliance Specification for D-PHY.

To support MIPI D-PHY with SLVS (LVDS) and LVCMOS12, the bank V_{CCIO} cannot be set to 1.5 V or 1.8 V. It has to connect to 1.2 V, or 1.1 V.

All other DC parameters are the same as those listed in [SLVS](#) section. DC parameters for the LP driver and receiver are the same as those listed in LVCMOS12.

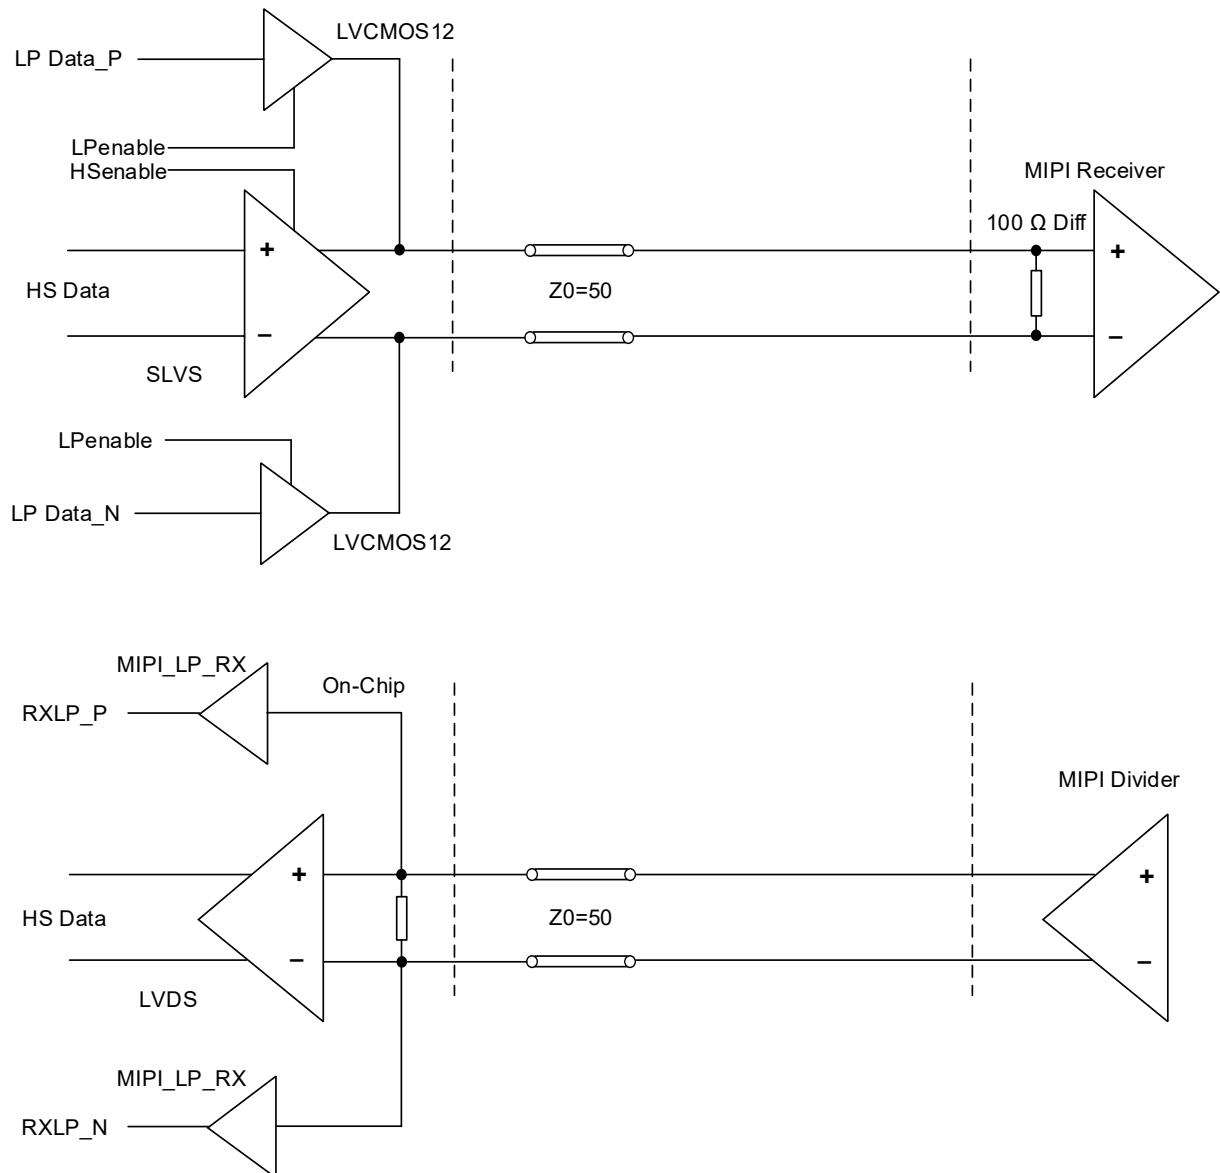


Figure 4.6. MIPI Interface

Table 4.26. Soft D-PHY Input Timing and Levels

Symbol	Description	Conditions	Min	Typ	Max	Unit
High Speed (Differential) Input DC Specifications						
$V_{CMRX(DC)}$	Common-mode Voltage in High Speed Mode	—	70	—	330	mV
V_{IDTH}	Differential Input HIGH Threshold	—	70	—	—	mV
V_{IDTL}	Differential Input LOW Threshold	—	—	—	–70	mV
V_{IHHS}	Input HIGH Voltage (for HS mode)	—	—	—	460	mV
V_{ILHS}	Input LOW Voltage	—	–40	—	—	mV
$V_{TERM-EN}$	Single-ended voltage for HS Termination Enable ⁴	—	—	—	450	mV
Z_{ID}	Differential Input Impedance	—	80	100	125	Ω
High Speed (Differential) Input AC Specifications						
$\Delta V_{CMRX(HF)}^1$	Common-mode Interference (>450 MHz)	—	—	—	100	mV
$\Delta V_{CMRX(LF)}^{2, 3}$	Common-mode Interference (50 MHz – 450 MHz)	—	–50	—	50	mV
C_{CM}	Common-mode Termination	—			60	pF
Low Power (Single-Ended) Input DC Specifications						
V_{IH}	Low Power Mode Input HIGH Voltage	—	740	—	—	mV
V_{IL}	Low Power Mode Input LOW Voltage	—	—	—	480	mV
V_{IL-ULP}	Ultra Low Power Input LOW Voltage	—	—	—	300	mV
V_{HYST}	Low Power Mode Input Hysteresis	—	25	—	—	mV
E_{SPIKE}	Input Pulse Rejection	—	—	—	300	V·ps
T_{MIN-RX}	Minimum Pulse Width Response	—	20	—	—	ns
V_{INT}	Peak Interference Amplitude	—	—	—	200	mV
f_{INT}	Interference Frequency	—	450	—	—	MHz

Notes:

1. This is peak amplitude of sine wave modulated to the receiver inputs.
2. Input common-mode voltage difference compared to average common-mode voltage on the receiver inputs.
3. Exclude any static ground shift of 50 mV.
4. High Speed Differential R_{TERM} is enabled when both D_P and D_N are below this voltage.

Table 4.27. Soft D-PHY Output Timing and Levels

Symbol	Description	Conditions	Min	Typ	Max	Unit
High Speed (Differential) Output DC Specifications						
V _{CMTX}	Common-mode Voltage in High Speed Mode	—	150	200	250	mV
ΔV _{CMTX(1,0)}	V _{CMTX} Mismatch Between Differential HIGH and LOW	—	—	—	7	mV
V _{OD}	Output Differential Voltage	D-PHY-P – D-PHY-N	140	200	270	mV
ΔV _{OD}	V _{OD} Mismatch Between Differential HIGH and LOW	—	—	—	25	mV
V _{OHHS}	Single-Ended Output HIGH Voltage	—	—	—	410	mV
Z _{OS}	Single Ended Output Impedance	—	37.5	50	80	Ω
ΔZ _{OS}	Z _{OS} mismatch	—	—	—	20	%
High Speed (Differential) Output AC Specifications						
ΔV _{CMTX(LF)}	Common-Mode Variation, 50 MHz–450 MHz	—	—	—	25	mV _{RMS}
ΔV _{CMTX(HF)}	Common-Mode Variation, above 450 MHz	—	—	—	15	mV _{RMS}
t _R	Output 20%–80% Rise Time Output 80%–20% Fall Time	0.08 Gbps ≤ t _R ≤ 1.00 Gbps	—	—	0.30	UI
		1.00 Gbps < t _R ≤ 1.25 Gbps	—	—	0.434	UI
t _F	Output Data Valid After CLK Output	0.08 Gbps ≤ t _F ≤ 1.00 Gbps	—	—	0.30	UI
		1.00 Gbps < t _F ≤ 1.25 Gbps	—	—	0.419	UI
Low Power (Single-Ended) Output DC Specifications						
V _{OH}	Low Power Mode Output HIGH Voltage	0.08 Gbps – 1.25 Gbps	1.07	1.2	1.3	V
V _{OL}	Low Power Mode Input LOW Voltage	—	–50	—	50	mV
Z _{OLP}	Output Impedance in Low Power Mode	—	110	—	—	Ω
Low Power (Single-Ended) Output AC Specifications						
t _{RLP}	15%–85% Rise Time	—	—	—	25	ns
t _{FLP}	85%–15% Fall Time	—	—	—	25	ns
t _{REOT}	HS – LP Mode Rise and Fall Time, 30%–85%	—	—	—	35	ns
T _{LP-PULSE-TX}	Pulse Width of the LP Exclusive-OR Clock	First LP XOR Clock Pulse after STOP State or Last Pulse before STOP State	40	—	—	ns
		All Other Pulses	20	—	—	ns
T _{LP-PER-TX}	Period of the LP Exclusive-OR Clock	—	90	—	—	ns
C _{LOAD}	Load Capacitance	—	0	—	70	pF

Table 4.28. Soft D-PHY Clock Signal Specification

Symbol	Description	Conditions	Min	Typ	Max	Unit
Clock Signal Specification						
UI Instantaneous	U_{INST}	—	—	—	12.5	ns
UI Variation	ΔUI	—	–10%	—	10%	UI
		—	–5%	—	5%	UI

Table 4.29. Soft D-PHY Data-Clock Timing Specifications

Symbol	Description	Conditions	Min	Typ	Max	Unit
Data-Clock Timing Specifications						
$T_{\text{SKEW}[\text{TX}]}$	Data to Clock Skew	$0.08 \text{ Gbps} \leq T_{\text{SKEW}[\text{TX}]} \leq 1.00 \text{ Gbps}$	-0.15	—	0.15	UI _{INST}
		$1.00 \text{ Gbps} < T_{\text{SKEW}[\text{TX}]} \leq 1.25 \text{ Gbps}$	-0.20	—	0.20	UI _{INST}
$T_{\text{SKEW}[\text{TLIS}]}$	Data to Clock Skew	$0.08 \text{ Gbps} \leq T_{\text{SKEW}[\text{TLIS}]} \leq 1.00 \text{ Gbps}$	-0.20	—	0.20	UI _{INST}
		$1.00 \text{ Gbps} < T_{\text{SKEW}[\text{TLIS}]} \leq 1.25 \text{ Gbps}$	-0.10	—	0.10	UI _{INST}
$T_{\text{SETUP}[\text{RX}]}$	Input Data Setup Before CLK	$0.08 \text{ Gbps} \leq T_{\text{SETUP}[\text{RX}]} \leq 1.00 \text{ Gbps}$	0.15	—	—	UI
		$1.00 \text{ Gbps} < T_{\text{SETUP}[\text{RX}]} \leq 1.25 \text{ Gbps}$	0.20	—	—	UI
$T_{\text{HOLD}[\text{RX}]}$	Input Data Hold After CLK	$0.08 \text{ Gbps} \leq T_{\text{HOLD}[\text{RX}]} \leq 1.00 \text{ Gbps}$	0.15	—	—	UI
		$1.00 \text{ Gbps} < T_{\text{HOLD}[\text{RX}]} \leq 1.25 \text{ Gbps}$	0.20	—	—	UI

4.13.7. Differential HSTL15D (Output Only)

Differential HSTL outputs are implemented as a pair of complementary single-ended HSTL outputs.

4.13.8. Differential SSTL135D, SSTL15D (Output Only)

Differential SSTL is used for differential clock in DDR3/DDR3L memory interface. All differential SSTL outputs are implemented as a pair of complementary single-ended SSTL outputs. All allowable single-ended output classes (class I and class II) are supported.

4.13.9. Differential HSUL12D (Output Only)

Differential HSUL is used for differential clock in LPDDR2/LPDDR3 memory interface. All differential HSUL outputs are implemented as a pair of complementary single-ended HSUL12 outputs. All allowable single-ended drive strengths are supported.

4.13.10. Differential LVCMOS25D, LVCMOS33D, LVTTTL33D (Output Only)

Differential LVCMOS and LVTTTL outputs are implemented as a pair of complementary single-ended outputs. All allowable single-ended output drive strengths are supported.

4.13.11. Differential LVSTLD (Output Only)

Differential LVSTL is used for differential clock in LPDDR4 memory interface. All differential LVSTL outputs are implemented as a pair of complementary single-ended LVSTL outputs. All allowable single-ended drive strengths are supported.

4.14. Maximum sysI/O Buffer Speed

Over recommended operating conditions.

Table 4.30. Maximum I/O Buffer Speed^{1, 2, 3, 4, 7}

Buffer	Description	Banks	Max	Unit
Maximum sysI/O Input Frequency				
Single-Ended				
LVC MOS33	LVC MOS33, V _{CCIO} = 3.3 V	0, 1, 2, 6, 7	200	MHz
LVTTL33	LVTTL33, V _{CCIO} = 3.3 V	0, 1, 2, 6, 7	200	MHz
LVC MOS25	LVC MOS25, V _{CCIO} = 2.5 V	1, 2, 6, 7	200	MHz
LVC MOS18 ⁵	LVC MOS18, V _{CCIO} = 1.8 V	1, 2, 6, 7	200	MHz
LVC MOS18H	LVC MOS18, V _{CCIO} = 1.8 V	3, 4, 5	200	MHz
LVC MOS15 ⁵	LVC MOS15, V _{CCIO} = 1.5 V	1, 2, 6, 7	100	MHz
LVC MOS15H ⁵	LVC MOS15, V _{CCIO} = 1.5 V	3, 4, 5	150	MHz
LVC MOS12 ⁵	LVC MOS12, V _{CCIO} = 1.2 V	1, 2, 6, 7	50	MHz
LVC MOS12H ⁵	LVC MOS12, V _{CCIO} = 1.2 V	3, 4, 5	100	MHz
LVC MOS10 ⁵	LVC MOS 1.0, V _{CCIO} = 1.2 V	1, 2, 6, 7	50	MHz
LVC MOS10H ⁵	LVC MOS 1.0, V _{CCIO} = 1.0 V	3, 4, 5	50	MHz
LVC MOS10R	LVC MOS 1.0, V _{CCIO} independent	3, 4, 5	50	MHz
SSTL15_I, SSTL15_II	SSTL_15, V _{CCIO} = 1.5 V	3, 4, 5	1066	Mbps
SSTL135_I, SSTL135_II	SSTL_135, V _{CCIO} = 1.35 V	3, 4, 5	1066	Mbps
LVSTL_I, LVSTL_II	LVSTL, V _{CCIO} = 1.1 V	3, 4, 5	1066	Mbps
HSUL12	HSUL_12, V _{CCIO} = 1.2 V	3, 4, 5	1066	Mbps
HSTL15	HSTL15, V _{CCIO} = 1.5 V	3, 4, 5	250	Mbps
MIPI D-PHY (LP Mode)	MIPI, Low Power Mode, V _{CCIO} = 1.2 V	3, 4, 5	10	Mbps
Differential⁸				
LVDS	LVDS, V _{CCIO} independent	3, 4, 5	1250	Mbps
subLVDS	subLVDS, V _{CCIO} independent	3, 4, 5	1250	Mbps
SLVS	SLVS similar to MIPI HS, V _{CCIO} independent	3, 4, 5	1250	Mbps
MIPI D-PHY (HS Mode)	MIPI, High Speed Mode, V _{CCIO} = 1.2 V	3, 4, 5	1250	Mbps
SSTL15D	Differential SSTL15, V _{CCIO} independent	3, 4, 5	1066	Mbps
SSTL135D	Differential SSTL135, V _{CCIO} independent	3, 4, 5	1066	Mbps
LVSTLD_I, LVSTLD_II	Differential LVSTL, V _{CCIO} independent	3, 4, 5	1066	Mbps
HSUL12D	Differential HSUL12, V _{CCIO} independent	3, 4, 5	1066	Mbps
HSTL15D	Differential HSTL15, V _{CCIO} independent	3, 4, 5	250	Mbps
Maximum sysI/O Output Frequency				
Single-Ended				
LVC MOS33 (all drive strengths)	LVC MOS33, V _{CCIO} = 3.3 V	0, 1, 2, 6, 7	200	MHz
LVC MOS33 (RS50)	LVC MOS33, V _{CCIO} = 3.3 V, R _{SERIES} = 50 Ω	0, 1, 2, 6, 7	200	MHz
LVTTL33 (all drive strengths)	LVTTL33, V _{CCIO} = 3.3 V	0, 1, 2, 6, 7	200	MHz
LVTTL33 (RS50)	LVTTL33, V _{CCIO} = 3.3 V, R _{SERIES} = 50 Ω	0, 1, 2, 6, 7	200	MHz
LVC MOS25 (all drive strengths)	LVC MOS25, V _{CCIO} = 2.5 V	1, 2, 6, 7	200	MHz
LVC MOS25 (RS50)	LVC MOS25, V _{CCIO} = 2.5 V, R _{SERIES} = 50 Ω	1, 2, 6, 7	200	MHz
LVC MOS18 (all drive strengths)	LVC MOS18, V _{CCIO} = 1.8 V	1, 2, 6, 7	200	MHz
LVC MOS18 (RS50)	LVC MOS18, V _{CCIO} = 1.8 V, R _{SERIES} = 50 Ω	1, 2, 6, 7	200	MHz
LVC MOS18H (all drive strengths)	LVC MOS18, V _{CCIO} = 1.8 V	3, 4, 5	200	MHz
LVC MOS18H (RS50)	LVC MOS18, V _{CCIO} = 1.8 V, R _{SERIES} = 50 Ω	3, 4, 5	200	MHz
LVC MOS15 (all drive strengths)	LVC MOS15, V _{CCIO} = 1.5 V	1, 2, 6, 7	100	MHz

Buffer	Description	Banks	Max	Unit
LVC MOS15H (all drive strengths)	LVC MOS15, $V_{CCIO} = 1.5\text{ V}$	3, 4, 5	150	MHz
LVC MOS12 (all drive strengths)	LVC MOS12, $V_{CCIO} = 1.2\text{ V}$	1, 2, 6, 7	50	MHz
LVC MOS12H (all drive strengths)	LVC MOS12, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	100	MHz
LVC MOS10H (all drive strengths)	LVC MOS12, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	50	MHz
SSTL15_I, SSTL15_II	SSTL_15, $V_{CCIO} = 1.5\text{ V}$	3, 4, 5	1066	Mbps
SSTL135_I, SSTL135_II	SSTL_135, $V_{CCIO} = 1.35\text{ V}$	3, 4, 5	1066	Mbps
LVSTL_I, LVSTL_II	LVSTL, $V_{CCIO} = 1.1\text{ V}$	3, 4, 5	1066	Mbps
HSUL12 (all drive strengths)	HSUL_12, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	1066	Mbps
HSTL15	HSTL15, $V_{CCIO} = 1.5\text{ V}$	3, 4, 5	250	Mbps
MIPI D-PHY (LP Mode)	MIPI, Low Power Mode, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	10	Mbps
Differential⁸				
LVDS	LVDS, $V_{CCIO} = 1.8\text{ V}$	5, 6	1250	Mbps
LVDS25E ⁶	LVDS25, Emulated, $V_{CCIO} = 2.5\text{ V}$	1, 2, 6, 7	400	Mbps
SubLVDS ⁶	subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$	1, 2, 6, 7	400	Mbps
SubLVDS ⁶ EH	subLVDS, Emulated, $V_{CCIO} = 1.8\text{ V}$	3, 4, 5	800	Mbps
SLVS	SLVS similar to MIPI, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	1250	Mbps
MIPI D-PHY (HS Mode)	MIPI, High Speed Mode, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	1250	Mbps
SSTL15D	Differential SSTL15, $V_{CCIO} = 1.5\text{ V}$	3, 4, 5	1066	Mbps
SSTL135D	Differential SSTL135, $V_{CCIO} = 1.35\text{ V}$	3, 4, 5	1066	Mbps
LVSTLD	Differential LVSTL, $V_{CCIO} = 1.1\text{ V}$	3, 4, 5	1066	Mbps
HSUL12D	Differential HSUL12, $V_{CCIO} = 1.2\text{ V}$	3, 4, 5	1066	Mbps
HSTL15D	Differential HSTL15, $V_{CCIO} = 1.5\text{ V}$	3, 4, 5	250	Mbps

Notes:

- Maximum I/O speed is the maximum switching rate of the I/O operating within the guidelines of the defining standard. The actual interface speed performance using the I/O also depends on other factors, such as internal and external timing.
- These numbers are characterized but not test on every device.
- Performance is specified in MHz, as defined in clock rate when the sysI/O is used as pin. For data rate performance, this can be converted to Mbps, which equals to 2 times the clock rate.
- LVC MOS and LV TTL are measured with load specified in [Table 4.46](#).
- These LVC MOS inputs can be placed in different V_{CCIO} voltage. Performance may vary. Please refer to Lattice Design Software
- These emulated outputs performance is based on externally properly terminated as described in [LVDS25E \(Output Only\)](#) and [SubLVDS/SubLVDS EH \(Output Only\)](#).
- All speeds are measured with fast slew.
- For maximum differential I/O performance, only Differential I/O should be placed in the bottom I/O banks. If this is not possible, the following will impact on maximum performance:
 - If Fast Slew Rate LVC MOS I/O are used, they should be limited to no more than nine I/O (adjacent), four I/O (same bank), 55 I/O (left/right banks) to keep degradation below 50%.
 - If non-Differential I/O (SLOW SLEW) are placed on the bottom but not within the same bank as differential I/O, then the maximum Differential performance is degraded to 70% of original when 21 aggressors are toggling.
 - If non-Differential I/O (SLOW SLEW) are placed within the same bank as Differential I/O then the maximum performance is degraded to 50% of original when 16 aggressor are toggling.
 - No performance impact if MIPI LP and MIPI HS are in the same bank.
 - If Differential RX/TX I/O are both placed within the same bank then the maximum performance is degraded to 90%.
 - For DDR3/3L, LPDDR2/3/4 separate DQ/DQS groups from Address/Commands/CLK groups into separate banks.

4.15. Typical Building Block Function Performance

These building block functions can be generated using Lattice Design Software Tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

Table 4.31. Pin-to-Pin Performance

Function	Typ. @ V _{CC} = 1.0 V	Unit
16-bit Decoder (I/O configured with LVCMOS18, Top, Left and Right Banks)	5.5	ns
16-bit Decoder (I/O configured with HSTL15_I, Bottom Banks)	5.1	ns
16:1 Mux (I/O configured with LVCMOS18, Top, Left and Right Banks)	6	ns
16:1 Mux (I/O configured with HSTL15_I, Bottom Banks)	6.1	ns

Note: These functions are generated using Lattice Radiant Design Software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.

Table 4.32. Register-to-Register Performance^{1, 3, 4}

Function	Typ. @ V _{CC} = 1.0 V	Unit
Basic Functions		
16-bit Adder	500 ²	MHz
32-bit Adder	496	MHz
16-bit Counter	402	MHz
32-bit Counter	371	MHz
Embedded Memory Functions		
512 × 36 Single Port RAM, with Output Register	500 ²	MHz
1024 × 18 True-Dual Port RAM using same clock, with EBR Output Registers	500 ²	MHz
1024 × 18 True-Dual Port RAM using asynchronous clocks, with EBR Output Registers	500 ²	MHz
Large Memory Functions		
32 k × 32 Single Port RAM, with Output Register	375 ²	MHz
32 k × 32 Single Port RAM with ECC, with Output Register	350 ²	MHz
32 k × 32 True-Dual Port RAM using same clock, with Output Registers	200	MHz
Distributed Memory Functions		
16 × 4 Single Port RAM (One PFU)	500 ²	MHz
16 × 2 Pseudo-Dual Port RAM (One PFU)	500 ²	MHz
16 × 4 Pseudo-Dual Port (Two PFUs)	500 ²	MHz
DSP Functions		
9 × 9 Multiplier with Input Output Registers	376	MHz
18 × 18 Multiplier with Input/Output Registers	287	MHz
36 × 36 Multiplier with Input/Output Registers	200	MHz
MAC 18 × 18 with Input/Output Registers	203	MHz
MAC 18 × 18 with Input/Pipelined/Output Registers	287	MHz
MAC 36 × 36 with Input/Output Registers	119	MHz
MAC 36 × 36 with Input/Pipelined/Output Registers	155	MHz

Notes:

1. The Clock port is configured with LVDS I/O type. Performance Grade: 9_High-Performance_1.0V.
2. Limited by the Minimum Pulse Width of the component
3. These functions are generated using Lattice Radiant Design Software tool. Exact performance may vary with the device and the design software tool version. The design software tool uses internal parameters that have been characterized but are not tested on every device.
4. For the Pipelined designs, the number of pipeline stages used are 2.

4.16. LMMI

Table 4.33 summarizes the performance of the LMMI interface with supported IPs. Additional timing requirement and constraint can be identified through the Lattice Radiance design tools.

Table 4.33. LMMI F_{MAX} Summary

IP	F _{MAX} (MHz)
CDR0	73
CDR1	70
CRE	54
I2C	38
PLL_ULC	59
PLL_LRC	37

4.17. Derating Timing Tables

Logic timing provided in the following sections of this data sheet and the Lattice Radiant design tools are worst case numbers in the operating range. Actual delays at nominal temperature and voltage for best case process, can be much better than the values given in the tables. The Lattice Radiant design tool can provide logic timing numbers at a particular temperature and voltage.

4.18. External Switching Characteristics

Over recommended commercial operating conditions.

Table 4.34. External Switching Characteristics ($V_{CC} = 1.0\text{ V}$)

Parameter	Description	−9		−8		−7		Unit
		Min	Max	Min	Max	Min	Max	
Clocks								
Primary Clock								
f _{MAX_PRI}	Frequency for Primary Clock	—	400	—	325.2	—	276	MHz
t _{W_PRI}	Clock Pulse Width for Primary Clock	1.125	—	1.325	—	1.594	—	ns
t _{SKEW_PRI} ⁶	Primary Clock Skew Within a Device	—	450	—	554	—	653	ps
Edge Clock								
f _{MAX_EDGE}	Frequency for Edge Clock Tree	—	800	—	650.4	—	551.7	MHz
t _{W_EDGE}	Clock Pulse Width for Edge Clock	0.513	—	0.65	—	0.743	—	ns
t _{SKEW_EDGE} ⁶	Edge Clock Skew Within a Device	—	120	—	148	—	174	ps
Generic SDR Input								
General I/O Pin Parameters Using Dedicated Primary Clock Input without PLL								
t _{CO} (Except Bank0)	Clock to Output – PIO Output Register	—	8.36	—	8.53	—	8.67	ns
t _{CO} (Bank0)	Clock to Output – PIO Output Register	—	9.54	—	9.54	—	9.54	ns
t _{SU}	Clock to Data Setup – PIO Input Register	0.00	—	0.00	—	0.00	—	ns
t _{H(LTR)} (Except Bank0)	Clock to Data Hold – PIO Input Register	3.73	—	3.83	—	3.93	—	ns
t _{H(LTR)} (Bank0)	Clock to Data Hold – PIO Input Register	4.20	—	4.20	—	4.20	—	ns
t _{H(Bottom)}	Clock to Data Hold – PIO Input Register	4.65	—	4.75	—	4.84	—	ns
t _{SU_DEL}	Clock to Data Setup – PIO Input Register with Data Input Delay	1.84	—	1.84	—	1.84	—	ns
t _{H_DEL(LTR)} (Except Bank0)	Clock to Data Hold – PIO Input Register with Data Input Delay	0.22	—	0.22	—	0.22	—	ns
t _{H_DEL(LTR)} (Bank0)	Clock to Data Hold – PIO Input Register with Data Input Delay	0.31	—	0.31	—	0.31	—	ns
t _{H_DEL(Bottom)}	Clock to Data Hold – PIO Input Register with Data Input Delay	1.77	—	1.77	—	1.77	—	ns
General I/O Pin Parameters Using Dedicated Primary Clock Input with PLL								
t _{COPLL}	Clock to Output – PIO Output Register	—	4.55	—	4.67	—	5.51	ns
t _{SUPLL} (LTR except Bank0)	Clock to Data Setup – PIO Input Register	1.33	—	1.33	—	1.33	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
$t_{SUPLL}(\text{Bank0})$	Clock to Data Setup – PIO Input Register	2.10	—	2.10	—	2.10	—	ns
$t_{SUPLL}(\text{Bottom})$	Clock to Data Setup – PIO Input Register	1.33	—	1.33	—	1.33	—	ns
$t_{HPLL}(\text{LTR})$	Clock to Data Hold – PIO Input Register	0.98	—	1.21	—	1.42	—	ns
$t_{HPLL}(\text{Bottom})$	Clock to Data Hold – PIO Input Register	1.87	—	1.87	—	1.87	—	ns
$t_{SU_DELPLL}(\text{LTR except Bank1})$	Clock to Data Setup – PIO Input Register with Data Input Delay	4.74	—	4.74	—	4.74	—	ns
$t_{SU_DELPLL}(\text{Bank1})$	Clock to Data Setup – PIO Input Register with Data Input Delay	5.50	—	5.50	—	5.50	—	ns
$t_{SU_DELPLL}(\text{Bottom})$	Clock to Data Setup – PIO Input Register with Data Input Delay	4.74	—	4.74	—	4.74	—	ns
t_{H_DELPLL}	Clock to Data Hold – PIO Input Register with Data Input Delay	0.00	—	0.00	—	0.00	—	ns
Generic DDR Input/Output								
Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input (Left, Top and Right Banks) – Figure 4.7 and Figure 4.9								
t_{SU_GDDR1}	Input Data Setup Before CLK	0.917	—	0.917	—	0.917	—	ns
		0.275	—	0.275	—	0.275	—	UI
t_{HO_GDDR1}	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns
t_{DVB_GDDR1}	Output Data Valid After CLK Output	1.134	—	1.113	—	1.014	—	ns
		–0.533	—	–0.554	—	–0.653	—	ns + ½UI
t_{DQVA_GDDR1}	Output Data Valid After CLK Output	1.217	—	1.113	—	1.014	—	ns
		–0.45	—	–0.554	—	–0.653	—	ns + ½UI
f_{DATA_GDDR1}	Input/Output Data Rate	—	300	—	300	—	300	Mbps
f_{MAX_GDDR1}	Frequency of PCLK	—	150	—	150	—	150	MHz
½ UI	Half of Data Bit Time, or 90 degree	1.667	—	1.667	—	1.667	—	ns
Output TX to Input RX Margin per Edge		0.3	—	0.197	—	0.097	—	ns
Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input (Left, Top and Right Banks) – Figure 4.8 and Figure 4.10								
t_{DVA_GDDR1}	Input Data Valid After CLK	—	–0.917	—	–0.917	—	–0.917	ns + ½UI
		—	0.75	—	0.75	—	0.75	ns
		—	0.225	—	0.225	—	0.225	UI
t_{DVE_GDDR1}	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns + ½UI
		2.583	—	2.583	—	2.583	—	ns
		0.775	—	0.775	—	0.775	—	UI
t_{DIA_GDDR1}	Output Data Invalid After CLK Output	—	0.554	—	0.554	—	0.653	ns
t_{DIB_GDDR1}	Output Data Invalid Before CLK Output	—	0.45	—	0.554	—	0.653	ns
f_{DATA_GDDR1}	Input/Output Data Rate	—	300	—	300	—	300	Mbps
f_{MAX_GDDR1}	Frequency for PCLK	—	150	—	150	—	150	MHz
½ UI	Half of Data Bit Time, or 90 degree	1.667	—	1.667	—	1.667	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
Output TX to Input RX Margin per Edge		0.300	—	0.197	—	0.097	—	ns
Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input (Bottom Banks) – Figure 4.7 and Figure 4.9								
t _{SU_GDDR1}	Input Data Setup Before CLK	0.917	—	0.917	—	0.917	—	ns
		0.275	—	0.275	—	0.275	—	UI
t _{HO_GDDR1}	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns
f _{DATA_IN_GDDR1}	Input Data Rate	—	300	—	300	—	300	Mbps
t _{DVB_GDDR1}	Output Data Valid After CLK Output	0.670	—	0.631	—	0.744	—	ns
		-0.330	—	-0.369	—	-0.435	—	ns + ½UI
t _{DQVA_GDDR1}	Output Data Valid After CLK Output	0.700	—	0.631	—	0.744	—	ns
		-0.300	—	-0.369	—	-0.435	—	ns + ½UI
f _{DATA_GDDR1}	Input/Output Data Rate	—	500	—	500	—	424	Mbps
f _{MAX_GDDR1}	Frequency of PCLK	—	250	—	250	—	212	MHz
½ UI	Half of Data Bit Time, or 90 degree	1.000	—	1	—	1.179	—	ns
Output TX to Input RX Margin per Edge		0.150	—	0.081	—	0.095	—	ns
Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input (Bottom Banks) – Figure 4.8 and Figure 4.10								
t _{DVA_GDDR1}	Input Data Valid After CLK	—	-0.917	—	-0.917	—	-0.917	ns + ½UI
		—	0.75	—	0.75	—	0.75	ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR1}	Input Data Hold After CLK	0.917	—	0.917	—	0.917	—	ns + ½UI
		2.583	—	2.583	—	2.583	—	ns
		0.775	—	0.775	—	0.775	—	UI
f _{DATA_IN_GDDR1}	Input Data Rate	—	300	—	300	—	300	Mbps
t _{DIA_GDDR1}	Output Data Invalid After CLK Output	—	0.3	—	0.369	—	0.435	ns
t _{DIB_GDDR1}	Output Data Invalid Before CLK Output	—	0.3	—	0.369	—	0.435	ns
f _{DATA_GDDR1}	Input/Output Data Rate	—	500	—	500	—	424	Mbps
f _{MAX_GDDR1}	Frequency for PCLK	—	250	—	250	—	212	MHz
½ UI	Half of Data Bit Time, or 90 degree	1	—	1	—	1.179	—	ns
Output TX to Input RX Margin per Edge		0.15	—	0.081	—	0.095	—	ns
Generic DDRX2 Inputs/Outputs with Clock and Data Centered at Pin (GDDR2_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9								
t _{SU_GDDR2}	Data Setup before CLK Input	0.209	—	0.209	—	0.206	—	ns
		0.209	—	0.209	—	0.175	—	UI
t _{HO_GDDR2}	Data Hold after CLK Input	0.213	—	0.213	—	0.206	—	ns
t _{DVB_GDDR2}	Output Data Valid Before CLK Output	0.360	—	0.352	—	0.415	—	ns
		-0.140	—	-0.148	—	-0.174	—	ns + ½UI
t _{DQVA_GDDR2}	Output Data Valid After CLK Output	0.38	—	0.352	—	0.415	—	ns
		-0.12	—	-0.148	—	-0.174	—	ns + ½UI
f _{DATA_GDDR2}	Input/Output Data Rate	—	1000	—	1000	—	848	Mbps
f _{MAX_GDDR2}	Frequency for ECLK	—	500	—	500	—	424	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.5	—	0.5	—	0.589	—	ns
f _{PCLK}	PCLK frequency	—	250	—	250	—	212.1	MHz
Output TX to Input RX Margin per Edge		0.23	—	0.202	—	0.239	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
Generic DDRX2 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR2_RX/TX.ECLK.Aligned) using PCLK Clock Input – Figure 4.8 and Figure 4.10								
t _{DVA_GDDR2}	Input Data Valid After CLK	—	–0.275	—	–0.275	—	–0.324	ns + ½UI
		—	0.225	—	0.225	—	0.265	ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR2}	Input Data Hold After CLK	0.275	—	0.275	—	0.324	—	ns + ½UI
		0.775	—	0.775	—	0.914	—	ns
		0.775	—	0.775	—	0.775	—	UI
t _{DIA_GDDR2}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.174	ns
t _{DIB_GDDR2}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR2}	Input/Output Data Rate	—	1000	—	1000	—	848	Mbps
f _{MAX_GDDR2}	Frequency for ECLK	—	500	—	500	—	424	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.5	—	0.5	—	0.589	—	ns
f _{PCLK}	PCLK frequency	—	250	—	250	—	212.1	MHz
Output TX to Input RX Margin per Edge		0.105	—	0.077	—	0.091	—	ns
Generic DDRX4 Inputs/Outputs with Clock and Data Centered at Pin (GDDR4_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9								
t _{SU_GDDR4}	Input Data Set-Up Before CLK	0.210	—	0.210	—	0.244	—	ns
		0.315	—	0.252	—	0.252	—	UI
t _{HO_GDDR4}	Input Data Hold After CLK	0.254	—	0.254	—	0.244	—	ns
t _{DVB_GDDR4}	Output Data Valid Before CLK Output	0.193	—	0.269	—	0.309	—	ns
		–0.140	—	–0.148	—	–0.174	—	ns + ½ UI
t _{DQVA_GDDR4}	Output Data Valid After CLK Output	0.213	—	0.269	—	0.309	—	ns
		–0.12	—	–0.148	—	–0.174	—	ns + ½ UI
f _{DATA_GDDR4}	Input/Output Data Rate	—	1500	—	1200	—	1034	Mbps
f _{MAX_GDDR4}	Frequency for ECLK	—	750	—	600	—	517	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns
f _{PCLK}	PCLK Frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.08	—	0.102	—	0.116	—	ns
Generic DDRX4 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR4_RX/TX.ECLK.Aligned) using PCLK Clock Input, Left and Right sides Only – Figure 4.8 and Figure 4.10								
t _{DVA_GDDR4}	Input Data Valid After CLK	—	–0.216	—	–0.229	—	–0.266	ns + ½UI
		—	0.117	—	0.188	—	0.218	ns
		—	0.176	—	0.225	—	0.225	UI
t _{DVE_GDDR4}	Input Data Hold After CLK	0.227	—	0.229	—	0.266	—	ns + ½UI
		0.560	—	0.646	—	0.749	—	ns
		0.840	—	0.775	—	0.775	—	UI
t _{DIA_GDDR4}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.17	ns
t _{DIB_GDDR4}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR4}	Input/Output Data Rate	—	1500	—	1200	—	1034	Mbps
f _{MAX_GDDR4}	Frequency for ECLK	—	750	—	600	—	517	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
f _{PCLK}	PCLK frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.03	—	0.04	—	0.044	—	ns
Generic DDRX5 Inputs/Outputs with Clock and Data Centered at Pin (GDDR5_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 4.7 and Figure 4.9								
t _{SU_GDDR5}	Input Data Set-Up Before CLK	0.231	—	0.231	—	0.224	—	ns
		0.289	—	0.277	—	0.224	—	UI
t _{HO_GDDR5}	Input Data Hold After CLK	0.229	—	0.229	—	0.224	—	ns
t _{WINDOW_GDDR5C}	Input Data Valid Window	—	—	—	—	—	—	ns
t _{DVB_GDDR5}	Output Data Valid Before CLK Output	0.249	—	0.269	—	0.326	—	ns
		-0.151	—	-0.148	—	-0.174	—	Ns + ½UI
t _{DQVA_GDDR5}	Output Data Valid After CLK Output	0.249	—	0.269	—	0.326	—	ns
		-0.151	—	-0.148	—	-0.174	—	Ns + ½UI
f _{DATA_GDDR5}	Input/Output Data Rate	—	1250	—	1200	—	1000	Mbps
f _{MAX_GDDR5}	Frequency for ECLK	—	625	—	600	—	500	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.4	—	0.417	—	0.5	—	ns
f _{PCLK}	PCLK frequency	—	125	—	120	—	100	MHz
Output TX to Input RX Margin per Edge		0.12	—	0.102	—	0.126	—	ns
Generic DDRX5 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR5_RX/TX.ECLK.Aligned) using PCLK Clock Input – Figure 4.8 and Figure 4.10								
t _{DVA_GDDR5}	Input Data Valid After CLK	—	-0.220	—	-0.229	—	-0.275	ns + ½UI
		—	0.18	—	0.188	—	0.225	ns
		—	0.225	—	0.225	—	0.225	UI
t _{DVE_GDDR5}	Input Data Hold After CLK	0.22	—	0.229	—	0.275	—	ns + ½UI
		0.62	—	0.646	—	0.775	—	ns
		0.775	—	0.775	—	0.775	—	UI
t _{WINDOW_GDDR5A}	Input Data Valid Window	—	—	—	—	—	—	ns
t _{DIA_GDDR5}	Output Data Invalid After CLK Output	—	0.12	—	0.148	—	0.174	ns
t _{DIB_GDDR5}	Output Data Invalid Before CLK Output	—	0.12	—	0.148	—	0.174	ns
f _{DATA_GDDR5}	Input/Output Data Rate	—	1250	—	1200	—	1000	Mbps
f _{MAX_GDDR5}	Frequency for ECLK	—	625	—	600	—	500	MHz
½ UI	Half of Data Bit Time, or 90 degree	0.4	—	0.417	—	0.5	—	ns
f _{PCLK}	PCLK frequency	—	125	—	120	—	100	MHz
Output TX to Input RX Margin per Edge		0.06	—	0.04	—	0.051	—	ns
Soft D-PHY DDRX4 Inputs/Outputs with Clock and Data Centered at Pin, using PCLK Clock Input								
t _{SU_GDDR4_MP}	Input Data Set-Up Before CLK	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
t _{HO_GDDR4_MP}	Input Data Hold After CLK	0.133	—	0.167	—	0.193	—	ns
t _{DVB_GDDR4_MP}	Output Data Valid Before CLK Output	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
t _{DQVA_GDDR4_MP}	Output Data Valid After CLK Output	0.133	—	0.167	—	0.193	—	ns
		0.2	—	0.2	—	0.2	—	UI
f _{DATA_GDDR4_MP}	Input Data Bit Rate for MIPI PHY	—	1500	—	1200	—	1034	Mbps

Parameter	Description	-9		-8		-7		Unit
		Min	Max	Min	Max	Min	Max	
$\frac{1}{2}$ UI	Half of Data Bit Time, or 90 degree	0.333	—	0.417	—	0.483	—	ns
f_{PCLK}	PCLK frequency	—	187.5	—	150	—	129.3	MHz
Output TX to Input RX Margin per Edge		0.067	—	0.083	—	0.097	—	ns
Video DDRX71 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR71_RX.ECLK) using PLL Clock Input – Figure 4.12 and Figure 4.13								
t_{RPBI_DVA}	Input Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	—	0.264	—	0.264	—	0.3	UI
		—	-0.250	—	-0.250	—	-0.249	$ns + (\frac{1}{2} + i) * UI$
t_{RPBI_DVE}	Input Hold Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	0.761	—	0.761	—	0.7	—	UI
		0.276	—	0.276	—	0.249	—	$ns + (\frac{1}{2} + i) * UI$
t_{TPBI_DOV}	Data Output Valid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	—	0.159	—	0.159	—	0.187	$ns + i * UI$
t_{TPBI_DOI}	Data Output Invalid Bit "i" switch from CLK Rising Edge ("i" = 0 to 6, 0 aligns with CLK)	0.159	—	0.159	—	0.187	—	$ns + (i + 1) * UI$
$t_{TPBI_skew_UI}$	TX skew in UI	—	0.15	—	0.15	—	0.15	UI
t_B	Serial Data Bit Time, = 1UI	1.058	—	1.058	—	1.247	—	ns
f_{DATA_TX71}	DDR71 Serial Data Rate	—	945	—	945	—	802	Mbps
f_{MAX_TX71}	DDR71 ECLK Frequency	—	473	—	473	—	401	MHz
f_{CLKIN}	7:1 Clock (PCLK) Frequency	—	135	—	135	—	114.5	MHz
Output TX to Input RX Margin per Edge		0.159	—	0.159	—	0.187	—	ns
Memory Interface								
DDR3/DDR3L READ (DQ Input Data are Aligned to DQS) – Figure 4.8								
t_{DVBQ_DDR3} t_{DVBQ_DDR3L}	Data Input Valid before DQS Input	—	-0.235	—	-0.235	—	-0.277	$ns + \frac{1}{2}UI$
t_{DVADQ_DDR3} t_{DVADQ_DDR3L}	Data Input Valid after DQS Input	0.235	—	0.235	—	0.277	—	$ns + \frac{1}{2}UI$
f_{DATA_DDR3} f_{DATA_DDR3L}	DDR Memory Data Rate	—	1066	—	1066	—	904	Mb/s
$f_{MAX_ECLK_DDR3}$ $f_{MAX_ECLK_DDR3L}$	DDR Memory ECLK Frequency	—	533	—	533	—	452	MHz
$f_{MAX_SCLK_DDR3}$ $f_{MAX_SCLK_DDR3L}$	DDR Memory SCLK Frequency	—	133.3	—	133.3	—	113	MHz
DDR3/DDR3L WRITE (DQ Output Data are Centered to DQS) – Figure 4.11								
t_{DQVBS_DDR3} t_{DQVBS_DDR3L}	Data Output Valid before DQS Output	—	-0.235	—	-0.235	—	-0.277	$ns + \frac{1}{2}UI$
t_{DQVAS_DDR3} t_{DQVAS_DDR3L}	Data Output Valid after DQS Output	0.235	—	0.235	—	0.277	—	$ns + \frac{1}{2}UI$
f_{DATA_DDR3} f_{DATA_DDR3L}	DDR Memory Data Rate	—	1066	—	1066	—	904	Mb/s
$f_{MAX_ECLK_DDR3}$ $f_{MAX_ECLK_DDR3L}$	DDR Memory ECLK Frequency	—	533	—	533	—	452	MHz
$f_{MAX_SCLK_DDR3}$ $f_{MAX_SCLK_DDR3L}$	DDR Memory SCLK Frequency	—	133.3	—	133.3	—	113	MHz

Notes:

- Commercial timing numbers are shown. Industrial numbers are typically slower and can be extracted from the Lattice Radiant software.

- General I/O timing numbers are based on LVCMOS 1.8, 8 mA, Fast Slew Rate, 0 pf load for all IOs except the bank0. For bank0, the number are based on LVCMOS 3.3, 12 mA, Fast Slew Rate, 0 pf load.
Generic DDR timing are numbers based on LVDS I/O.
DDR3 timing numbers are based on SSTL15.
- Uses LVDS I/O standard for measurements.
- Maximum clock frequencies are tested under best case conditions. System performance may vary upon the user environment.
- All numbers are generated with the Lattice Radiant software.
- This clock skew is not the internal clock network skew. Nexus family devices have very low internal clock network skew that can be approximated to 0 ps. These t_{skew} values measured externally at system level includes additional skew added by the I/O, wire bonding and package ball.

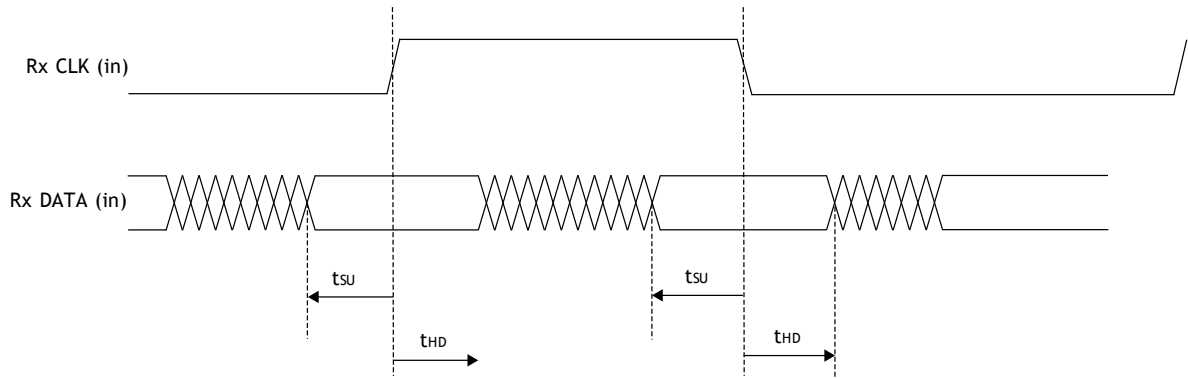


Figure 4.7. Receiver RX.CLK.Centered Waveforms

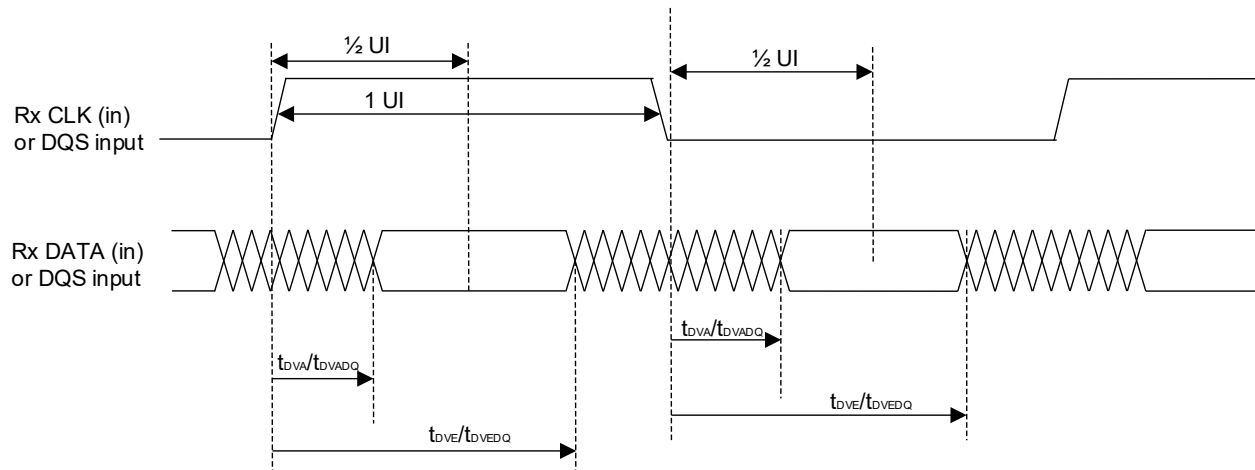


Figure 4.8. Receiver RX.CLK.Aligned and DDR Memory Input Waveforms

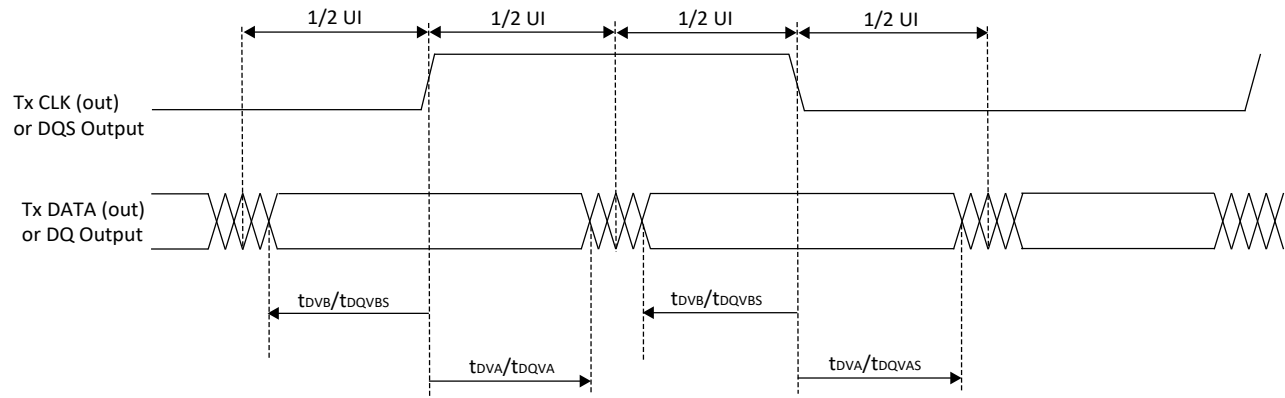


Figure 4.9. Transmit TX.CLK.Centered and DDR Memory Output Waveforms


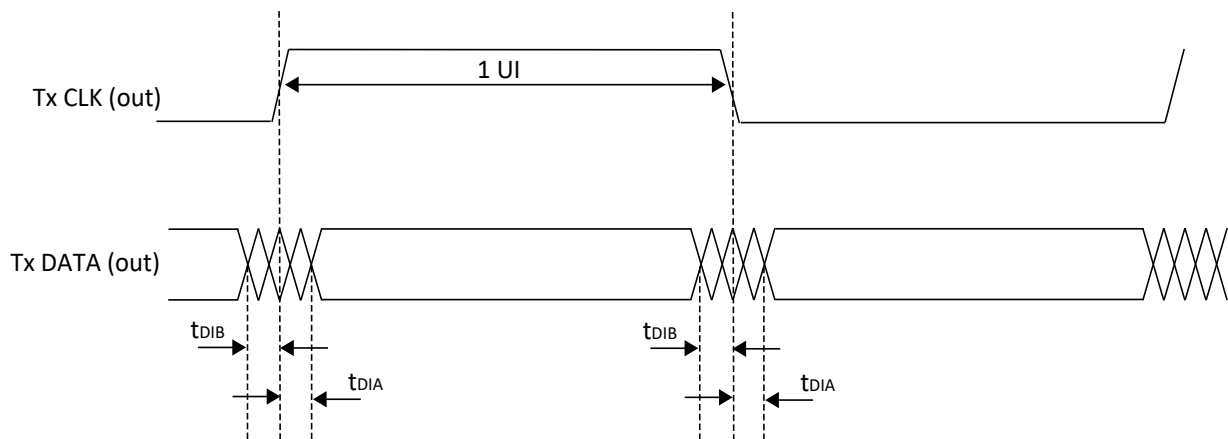


Figure 4.10. Transmit TX.CLK.Aligned Waveforms

Receiver – Shown for one LVDS Channel

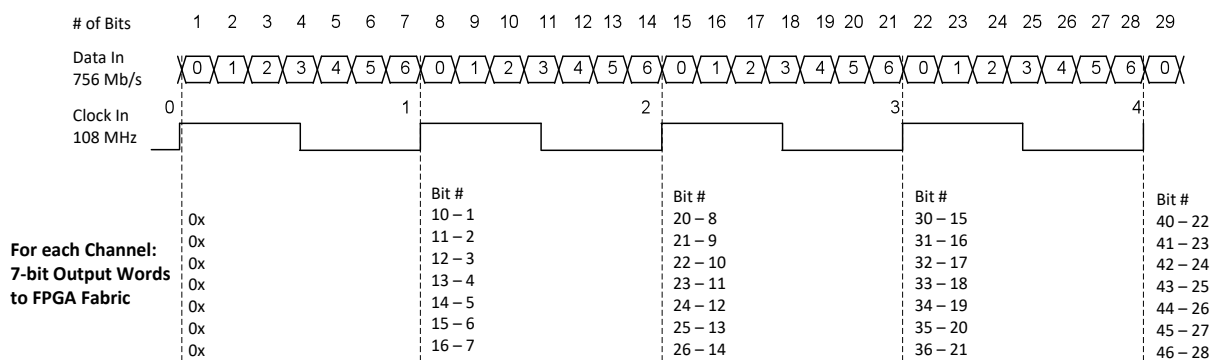

Transmitter – Shown for one LVDS Channel

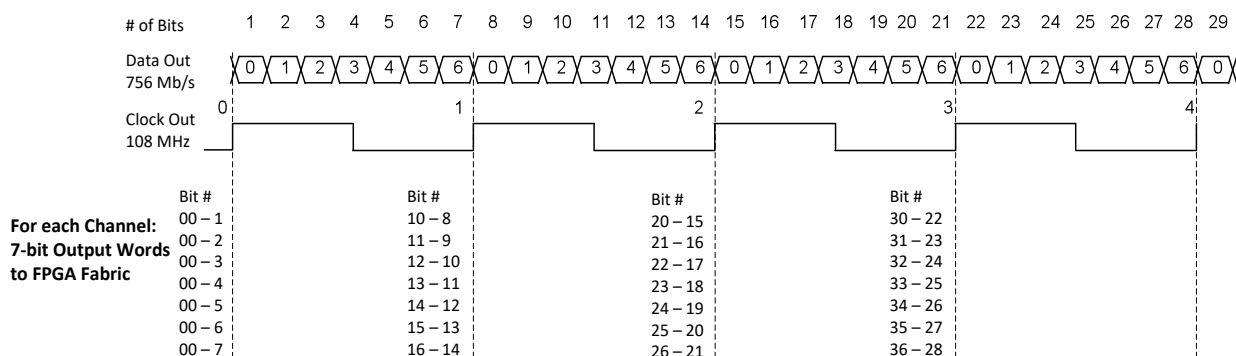


Figure 4.11. DDRX71 Video Timing Waveforms

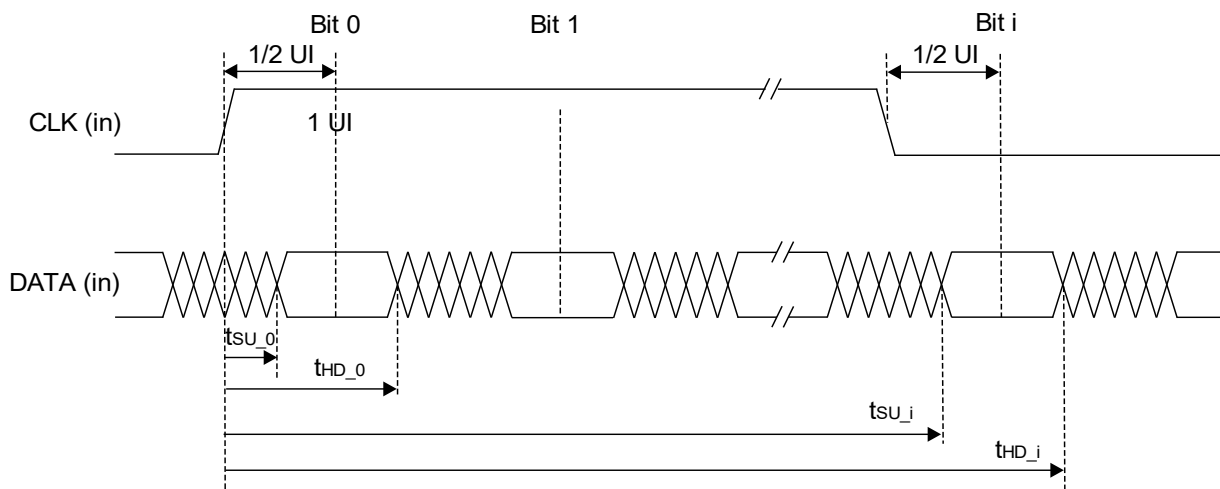


Figure 4.12. Receiver DDRX71_RX Waveforms

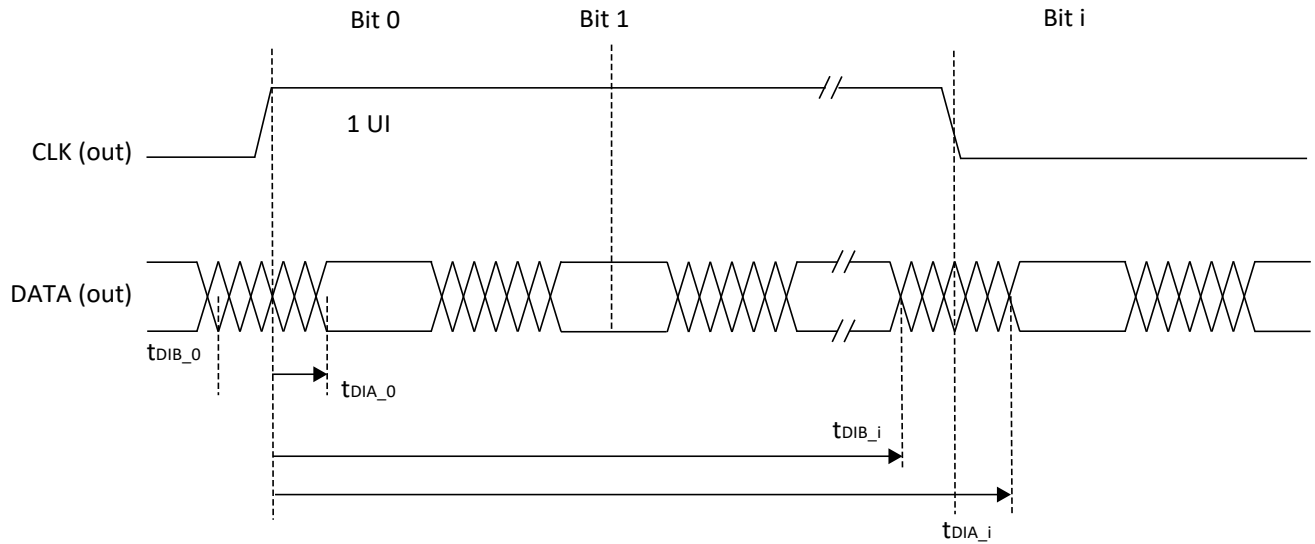


Figure 4.13. Transmitter DDRX71_TX Waveforms

4.19. sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$)

Over recommended operating conditions.

Table 4.35. sysCLOCK PLL Timing ($V_{CC} = 1.0\text{ V}$)

Parameter	Descriptions	Conditions	Min	Typ.	Max	Units
f _{IN}	Input Clock Frequency (CLKI, CLKFB)	—	18	—	500	MHz
f _{OUT}	Output Clock Frequency	—	6.25	—	800	MHz
f _{VCO}	PLL VCO Frequency	—	800	—	1600	MHz
f _{PFD}	Phase Detector Input Frequency	Without Fractional-N Enabled	18	—	500	MHz
		With Fractional-N Enabled	18	—	100	MHz
AC Characteristics						
t _{DT}	Output Clock Duty Cycle	—	45	—	55	%
t _{PH} ⁴	Output Phase Accuracy	—	–5	—	5	%
t _{OPJIT} ¹	Output Clock Period Jitter	f _{OUT} ≥ 200 MHz	—	—	250	ps p-p
		f _{OUT} < 200 MHz	—	—	0.05	UIPP
	Output Clock Cycle-to-Cycle Jitter	f _{OUT} ≥ 200 MHz	—	—	250	ps p-p
		f _{OUT} < 200 MHz	—	—	0.05	UIPP
	Output Clock Phase Jitter	f _{PFD} ≥ 200 MHz	—	—	250	ps p-p
		60 MHz ≤ f _{PFD} < 200 MHz	—	—	350	ps p-p
		30 MHz ≤ f _{PFD} < 60 MHz	—	—	450	ps p-p
		18 MHz ≤ f _{PFD} < 30 MHz	—	—	650	ps p-p
	Output Clock Period Jitter (Fractional-N)	f _{OUT} ≥ 200 MHz	—	—	350	ps p-p
		f _{OUT} < 200 MHz	—	—	0.07	UIPP
	Output Clock Cycle-to-Cycle Jitter (Fractional-N)	f _{OUT} ≥ 200 MHz	—	—	400	ps p-p
		f _{OUT} < 200 MHz	—	—	0.08	UIPP
f _{BW} ³	PLL Loop Bandwidth	—	0.45		13	MHz
t _{LOCK} ²	PLL Lock-in Time	—	—	—	10	ms
t _{UNLOCK}	PLL Unlock Time (from RESET goes HIGH)	—	—	—	50	ns
t _{IPJIT}	Input Clock Period Jitter	f _{PFD} ≥ 20 MHz	—	—	500	ps p-p

Parameter	Descriptions	Conditions	Min	Typ.	Max	Units
t_{HI}	Input Clock High Time	90% to 90%	0.5	—	—	ns
t_{LO}	Input Clock Low Time	10% to 10%	0.5	—	—	ns
t_{RST}	RST/ Pulse Width	—	1	—	—	ms
f_{SSC_MOD}	Spread Spectrum Clock Modulation Frequency	—	20	—	200	kHz
$f_{SSC_MOD_AMP}$	Spread Spectrum Clock Modulation Amplitude Range	—	0.25	—	2.00	%
$f_{SSC_MOD_STEP}$	Spread Spectrum Clock Modulation Amplitude Step Size	—	—	0.25	—	%

Notes:

1. Jitter sample is taken over 10,000 samples for Period jitter, and 1,000 samples for Cycle-to-Cycle jitter of the primary PLL output with clean reference clock with no additional I/O toggling.
2. Output clock is valid after t_{LOCK} for PLL reset and dynamic delay adjustment.
3. Result from Lattice Radiant software.
4. CLKOS as compared to CLKOP output for one phase step at the maximum VCO frequency.

4.20. Internal Oscillators Characteristics

Table 4.36. Internal Oscillators ($V_{CC} = 1.0\text{ V}$)

Symbol	Parameter Description	Min	Typ	Max	Unit
f_{CLKHF}	HFOSC CLKK Clock Frequency	418.5	450	481.5	MHz
f_{CLKLF}	LFOSC CLKK Clock Frequency	25.6	32	38.4	kHz
DCH_{CLKHF}	HFOSC Duty Cycle (Clock High Period)	45	50	55	%
DCH_{CLKLF}	LFOSC Duty Cycle (Clock High Period)	45	50	55	%

4.21. Flash Download Time

Table 4.37. Flash Download Time

Symbol	Parameter	Device	Typ.	Units
$t_{REFRESH}$	POR to Device I/O Active	LFMXO5-35T	—	ms
		LFMXO5-55/T	—	ms
		LFMXO5-65T	—	ms
		LFMXO5-100T	—	ms

Notes:

- Assumes sysMEM EBR initialized to an all zero pattern if they are used.
- The Flash download time is measured starting from the maximum voltage of POR trip point.

4.22. Flash Program and Erase Current

Table 4.38. Program and Erase Supply Current

Symbol	Parameter	Device	Typ.	Units
I_{CC}	Core Power Supply	LFMXO5-35T	—	mA
		LFMXO5-55/T	—	mA
		LFMXO5-65T	—	mA
		LFMXO5-100T	—	mA

4.23. User I2C Characteristics

Table 4.39. User I2C Specifications ($V_{CC} = 1.0\text{ V}$)

Symbol	Parameter Description	STD Mode			FAST Mode			FAST Mode Plus ²			Units
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
f_{SCL}	SCL Clock Frequency	—	—	100	—	—	400	—	—	1000	kHz
T_{DELAY}^1	Optional delay through delay block	—	62	—	—	62	—	—	62	—	ns

Notes:

1. Refer to the I2C Specification for timing requirements. User design should set constraints in Lattice Design Software to meet this industrial I2C Specification.
2. Fast Mode Plus maximum speed may be achieved by using external pull up resistor on I2C bus. Internal pull up may not be sufficient to support the maximum speed.

4.24. Analog-Digital Converter (ADC) Block Characteristics

Table 4.40. ADC Specifications¹

Symbol	Description	Condition	Min	Typ	Max	Unit
V_{REFINT_ADC}	ADC Internal Reference Voltage ⁴	—	1.14 ²	1.2	1.26 ²	V
V_{REFEXT_ADC}	ADC External Reference Voltage	—	1.0	—	1.8	V
N_{RES_ADC}	ADC Resolution	—	—	12	—	bits
$ENOB_{ADC}$	Effective Number of Bits	—	9.9	11	—	bits
V_{SR_ADC}	ADC Input Range	Bipolar Mode, Internal V_{REF}	$V_{CM_ADC} - V_{REFINT_ADC}/4$	V_{CM_ADC}	$V_{CM_ADC} + V_{REFINT_ADC}/4$	V
		Bipolar Mode, External V_{REF}	$V_{CM_ADC} - V_{REFEXT_ADC}/4$	V_{REFEXT_ADC}	$V_{CM_ADC} + V_{REFEXT_ADC}/4$	V
		Uni-polar Mode, Internal V_{REF}	0	—	V_{REFINT_ADC}	V
		Uni-polar Mode, External V_{REF}	0	—	V_{REFEXT_ADC}	V
V_{CM_ADC}	ADC Input Common Mode Voltage (for fully differential signals)	Internal V_{REF}	—	$V_{REFINT_ADC}/2$	—	V
		External V_{REF}	—	$V_{REFEXT_ADC}/2$	—	V
f_{CLK_ADC}	ADC Clock Frequency	—	—	25	40	MHz
f_{INPUT_ADC}	ADC Input Frequency	@ Sampling Frequency = 1 Mbps	—	—	500	kHz
FS_{ADC}	ADC Sampling Rate	—	—	1	—	MS/s
N_{TRACK_ADC}	ADC Input Tracking Time	—	4	—	—	cycles ³
R_{IN_ADC}	ADC Input Equivalent Resistance	—	—	116	—	K Ω
t_{CAL_ADC}	ADC Calibration Time	—	—	—	6500	cycles ³
L_{OUTput_ADC}	ADC Conversion Time	Includes minimum tracking time of four cycles	25	—	—	cycles ³
DNL_{ADC}	ADC Differential Nonlinearity	—	–1	—	1	LSB
INL_{ADC}	ADC Integral Nonlinearity	—	–2 ²	—	2.21	LSB
$SFDR_{ADC}$	ADC Spurious Free Dynamic Range	—	67.7	77	—	dBc

Symbol	Description	Condition	Min	Typ	Max	Unit
THD _{ADC}	ADC Total Harmonic Distortion	—	—	−76	−66.8	dB
SNR _{ADC}	ADC Signal to Noise Ratio	—	61.9	68	—	dB
SNDR _{ADC}	ADC Signal to Noise Plus Distortion Ratio	—	61.7	67	—	dB
ERR _{GAIN_ADC}	ADC Gain Error	—	−0.5	—	0.5	% FS _{ADC}
ERR _{OFFSET_ADC}	ADC Offset Error	—	−2	—	2	% FS _{ADC}
C _{IN_ADC}	ADC Input Equivalent Capacitance	—	—	2	—	pF

Notes:

1. ADC is available in select speed grades. See Ordering Information.
2. Not tested; guaranteed by design.
3. ADC Sample Clock cycles. See [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#) for more details.
4. Internal voltage reference is only for internal testing purpose. It is not recommended for customer design. User should always use the part with external reference voltage.

4.25. Comparator Block Characteristics

Table 4.41. Comparator Specifications

Symbol	Description	Min	Typ	Max	Unit
f _{IN_COMP}	Comparator Input Frequency	—	—	10	MHz
V _{IN_COMP}	Comparator Input Voltage	0	—	V _{CCADC18}	V
V _{OFFSET_COMP}	Comparator Input Offset	−23	—	24	mV
V _{HYST_COMP}	Comparator Input Hysteresis	10	—	31	mV
V _{LATENCY_COMP}	Comparator Latency	—	—	31	ns

Note: Comparator is available in select speed grades. See Ordering Information.

4.26. Digital Temperature Readout Characteristics

Digital temperature Readout (DTR) is implemented in one of the channels of ADC1.

Table 4.42. DTR Specifications^{1, 2}

Symbol	Description	Condition	Min	Typ	Max	Unit
DTR _{RANGE}	DTR Detect Temperature Range	—	−40	—	100	°C
DTR _{ACCURACY}	DTR Accuracy	with external voltage ¹ reference range of 1.0 V to 1.8 V	−13	±4	13	°C
DTR _{RESOLUTION}	DTR Resolution	with external voltage reference	−0.3	—	0.3	°C

Notes:

1. External voltage reference (VREF) should be 0.1% accurate or better. DTR sensitivity to VREF is −4.1 °C per VREF per-cent (for example, if the VREF is 1 % low, then the DTR will read +4.1 °C high).
2. DTR is available in select speed grades. See the Ordering Information section.

4.27. Hardened PCIe Characteristics for LFMXO5-35/T and LFMXO5-65/T Parts

4.27.1. PCIe (2.5 Gbps)

Symbol	Description	Condition	Min.	Typ.	Max.	Unit
Transmitter¹						
UI	Unit Interval	—	399.88	400	400.12	ps
BW _{TX}	Tx PLL bandwidth	—	1.5	—	22	MHz
V _{TX-DIFF-PP}	Differential p-p Tx voltage swing	—	0.8	—	1.2	Vp-p
V _{TX-DIFF-PP-LOW}	Low power differential p-p Tx voltage swing	—	0.4	—	1.2	Vp-p
V _{TX-DE-RATIO-3.5dB}	Tx de-emphasis level ratio at 3.5 dB	—	3	—	4	dB
T _{TX-RISE-FALL}	Transmitter rise and fall time	—	0.125	—	—	UI
T _{TX-EYE}	Transmitter Eye, including all jitter sources	—	0.75	—	—	UI
T _{TX-EYE-MEDIAN-to-MAX-JITTER}	Max. time between jitter median and max deviation from the median	—	—	—	0.125	UI
RL _{TX-DIFF}	Tx Differential Return Loss, including pkg and silicon	—	10	—	—	dB
RL _{TX-CM}	Tx Common Mode Return Loss, including pkg and silicon	50 MHz < freq < 2.5 GHz	6	—	—	dB
Z _{TX-DIFF-DC}	DC differential Impedance	—	80	—	120	Ω
V _{TX-CM-AC-P}	Tx AC peak common mode voltage, RMS	—	—	—	20	mV, RMS
I _{TX-SHORT}	Transmitter short-circuit current	—	—	—	90	mA
V _{TX-DC-CM}	Transmitter DC common-mode voltage	—	0	—	1.2	V
V _{TX-IDLE-DIFF-AC-p}	Electrical Idle Output peak voltage	—	—	—	20	mV
V _{TX-RCV-DETECT}	Voltage change allowed during Receiver Detect	—	—	—	600	mV
T _{TX-IDLE-MIN}	Min. time in Electrical Idle	—	20	—	—	ns
T _{TX-IDLE-SET-TO-IDLE}	Max. time from EI Order Set to valid Electrical Idle	—	—	—	8	ns
T _{TX-IDLE-TO-DIFF-DATA}	Max. time from Electrical Idle to valid differential output	—	—	—	8	ns
L _{TX-SKEW}	Lane-to-Lane output skew	—	—	—	500 ps + 2 UI	ps
Receiver²						
UI	Unit Interval	—	399.88	400	400.12	ps
V _{RX-DIFF-PP}	Differential Rx peak-peak voltage	—	0.175	—	1.2	Vp-p
T _{RX-EYE³}	Receiver eye opening time	—	0.4	—	—	UI
T _{RX-EYE-MEDIAN-to-MAX-JITTER³}	Max time delta between median and deviation from median	—	—	—	0.3	UI
RL _{RX-DIFF}	Receiver differential Return Loss, package plus silicon	—	10	—	—	dB
RL _{RX-CM}	Receiver common mode Return Loss, package plus silicon	—	6	—	—	dB

Symbol	Description	Condition	Min.	Typ.	Max.	Unit
Z _{RX-DC}	Receiver DC single ended impedance	—	40	—	60	Ω
Z _{RX-DIFF-DC}	Receiver DC differential impedance	—	80	—	120	Ω
Z _{RX-HIGH-IMP-DC}	Receiver DC single ended impedance when powered down	—	200K	—	—	Ω
V _{RX-CM-AC-P³}	Rx AC peak common mode voltage	—	—	—	150	mV, peak
V _{RX-IDLE-DET-DIFF-PP}	Electrical Idle Detect Threshold	—	65	—	175	mVp-p
L _{RX-SKEW}	Receiver – lane-lane skew	—	—	—	20	ps

Notes:

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement.

4.27.2. PCIe (5 Gbps)

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
Transmit ¹						
UI	Unit Interval	—	199.94	200	200.06	ps
B _{WTX-PKG-PLL1}	Tx PLL bandwidth corresponding to PKG _{TX-PLL1}	—	8	—	16	MHz
B _{WTX-PKG-PLL2}	Tx PLL bandwidth corresponding to PKG _{TX-PLL2}	—	5	—	16	MHz
P _{KGTX-PLL1}	Tx PLL Peaking corresponding to PKG _{TX-PLL1}	—	—	—	3	dB
P _{KGTX-PLL2}	Tx PLL Peaking corresponding to PKG _{TX-PLL2}	—	—	—	1	dB
V _{TX-DIFF-PP}	Differential p-p Tx voltage swing	—	0.8	—	1.2	V, p-p
V _{TX-DIFF-PP-LOW}	Low power differential p-p Tx voltage swing	—	0.4	—	1.2	V, p-p
V _{TX-DE-RATIO-3.5dB}	Tx de-emphasis level ratio at 3.5dB	—	3	—	4	dB
V _{TX-DE-RATIO-6dB}	Tx de-emphasis level ratio at 6dB	—	5.5	—	6.5	dB
T _{MIN-PULSE}	Instantaneous lone pulse width	—	0.9	—	—	UI
T _{TX-RISE-FALL}	Transmitter rise and fall time	—	0.15	—	—	UI
T _{TX-EYE}	Transmitter Eye, including all jitter sources	—	0.75	—	—	UI
T _{TX-DJ}	Tx deterministic jitter > 1.5 MHz	—	—	—	0.15	UI
T _{TX-RJ}	Tx RMS jitter < 1.5 MHz	—	—	—	3	ps, RMS
T _{RF-MISMATCH}	Tx rise/fall time mismatch	—	—	—	0.1	UI
R _{LTX-DIFF}	Tx Differential Return Loss, including package and silicon	50 MHz < freq < 1.25 GHz	10	—	—	dB
		1.25 GHz < freq < 2.5 GHz	8	—	—	dB
R _{LTX-CM}	Tx Common Mode Return Loss, including package and silicon	50 MHz < freq < 2.5 GHz	6	—	—	dB
Z _{TX-DIFF-DC}	DC differential Impedance	—	—	—	120	Ω
V _{TX-CM-AC-PP}	Tx AC peak common mode voltage, peak-peak	—	—	—	150	mV, p-p

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
I _{TX-SHORT}	Transmitter short-circuit current	—	—	—	90	mA
V _{TX-DC-CM}	Transmitter DC common-mode voltage	—	0	—	1.2	V
V _{TX-IDLE-DIFF-DC}	Electrical Idle Output DC voltage	—	0	—	5	mV
V _{TX-IDLE-DIFF-AC-p}	Electrical Idle Differential Output peak voltage	—	—	—	20	mV
V _{TX-RCV-DETECT}	Voltage change allowed during Receiver Detect	—	—	—	600	mV
T _{TX-IDLE-MIN}	Min. time in Electrical Idle	—	20	—	—	ns
T _{TX-IDLE-SET-TO-IDLE}	Max. time from EI Order Set to valid Electrical Idle	—	—	—	8	ns
T _{TX-IDLE-TO-DIFF-DATA}	Max. time from Electrical Idle to valid differential output	—	—	—	8	ns
Receive²						
L _{TX-SKEW}	Lane-to-Lane output skew	—	—	—	500 + 4 UI	ps
UI	Unit Interval	—	199.94	200	200.06	ps
V _{RX-DIFF-PP}	Differential Rx peak-peak voltage	—	0.34 ³	—	1.2	V, p-p
T _{RX-RJ-RMS}	Receiver random jitter tolerance (RMS)	1.5 MHz – 100 MHz Random noise	—	—	4.2	ps, RMS
T _{RX-DJ}	Receiver deterministic jitter tolerance	—	—	—	88	ps
R _{LRX-DIFF}	Receiver differential Return Loss, package plus silicon	50 MHz < freq < 1.25 GHz	10	—	—	dB
		1.25 GHz < freq < 2.5 GHz	8	—	—	dB
R _{LRX-CM}	Receiver common mode Return Loss, package plus silicon	—	6	—	—	dB
Z _{RX-DC}	Receiver DC single ended impedance	—	40	—	60	Ω
Z _{RX-HIGH-IMP-DC}	Receiver DC single ended impedance when powered down	—	200k	—	—	Ω
V _{RX-CM-AC-P³}	Rx AC peak common mode voltage	—	—	—	150	mV, peak
V _{RX-IDLE-DET-DIFF-PP}	Electrical Idle Detect Threshold	—	65	—	175 ³	mv, pp
L _{RX-SKEW}	Receiver –lane-lane skew	—	—	—	8	ns

Notes:

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement.

4.28. Hardened PCIe Characteristics for LFMXO5-55T and LFMXO5-100T Parts

4.28.1. PCIe (2.5 Gbps)

Table 4.43. PCIe (2.5 Gbps)

Symbol	Description	Condition	Min.	Typ.	Max.	Unit
Transmitter¹						
UI	Unit Interval	—	399.88	400	400.12	ps
BW _{TX}	Tx PLL bandwidth	—	1.5	—	22	MHz
V _{TX-DIFF-PP}	Differential p-p Tx voltage swing	—	0.8	—	1.2	Vp-p
V _{TX-DIFF-PP-LOW}	Low power differential p-p Tx voltage swing	—	0.4	—	1.2	Vp-p
V _{TX-DE-RATIO-3.5dB}	Tx de-emphasis level ratio at 3.5 dB	—	3	—	4	dB
T _{TX-RISE-FALL}	Transmitter rise and fall time	—	0.125	—	—	UI
T _{TX-EYE}	Transmitter Eye, including all jitter sources	—	0.75	—	—	UI
T _{TX-EYE-MEDIAN-to-MAX-JITTER}	Max. time between jitter median and max deviation from the median	—	—	—	0.125	UI
RL _{TX-DIFF}	Tx Differential Return Loss, including pkg and silicon	—	10	—	—	dB
RL _{TX-CM}	Tx Common Mode Return Loss, including pkg and silicon	50 MHz < freq < 2.5 GHz	6	—	—	dB
Z _{TX-DIFF-DC}	DC differential Impedance	—	80	—	120	Ω
V _{TX-CM-AC-P}	Tx AC peak common mode voltage, RMS	—	—	—	20	mV, RMS
I _{TX-SHORT}	Transmitter short-circuit current	—	—	—	90	mA
V _{TX-DC-CM}	Transmitter DC common-mode voltage	—	0	—	1.2	V
V _{TX-IDLE-DIFF-AC-P}	Electrical Idle Output peak voltage	—	—	—	20	mV
V _{TX-RCV-DETECT}	Voltage change allowed during Receiver Detect	—	—	—	600	mV
T _{TX-IDLE-MIN}	Min. time in Electrical Idle	—	20	—	—	ns
T _{TX-IDLE-SET-TO-IDLE}	Max. time from EI Order Set to valid Electrical Idle	—	—	—	8	ns
T _{TX-IDLE-TO-DIFF-DATA}	Max. time from Electrical Idle to valid differential output	—	—	—	8	ns
L _{TX-SKEW}	Lane-to-Lane output skew	—	—	—	500 ps + 2 UI	ps
Receiver²						
UI	Unit Interval	—	399.88	400	400.12	ps
V _{RX-DIFF-PP}	Differential Rx peak-peak voltage	—	0.175	—	1.2	Vp-p
T _{RX-EYE³}	Receiver eye opening time	—	0.4	—	—	UI
T _{RX-EYE-MEDIAN-to-MAX-JITTER³}	Max time delta between median and deviation from median	—	—	—	0.3	UI
RL _{RX-DIFF}	Receiver differential Return Loss, package plus silicon	—	10	—	—	dB

Symbol	Description	Condition	Min.	Typ.	Max.	Unit
RL _{RX-CM}	Receiver common mode Return Loss, package plus silicon	—	6	—	—	dB
Z _{RX-DC}	Receiver DC single ended impedance	—	40	—	60	Ω
Z _{RX-DIFF-DC}	Receiver DC differential impedance	—	80	—	120	Ω
Z _{RX-HIGH-IMP-DC}	Receiver DC single ended impedance when powered down	—	200k	—	—	Ω
V _{RX-CM-AC-P} ³	Rx AC peak common mode voltage	—	—	—	150	mV, peak
V _{RX-IDLE-DET-DIFF-PP}	Electrical Idle Detect Threshold	—	65	—	175	mVp-p
L _{RX-SKEW}	Receiver –lane-lane skew	—	—	—	20	ps

Notes:

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement.

4.28.2. PCIe (5 Gbps)

Table 4.44. PCIe (5 Gbps)

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
Transmit¹						
UI	Unit Interval	—	199.94	200	200.06	ps
B _{WTX-PKG-PLL1}	Tx PLL bandwidth corresponding to PKG _{TX-PLL1}	—	8	—	16	MHz
B _{WTX-PKG-PLL2}	Tx PLL bandwidth corresponding to PKG _{TX-PLL2}	—	5	—	16	MHz
P _{KGTX-PLL1}	Tx PLL Peaking corresponding to PKG _{TX-PLL1}	—	—	—	3	dB
P _{KGTX-PLL2}	Tx PLL Peaking corresponding to PKG _{TX-PLL2}	—	—	—	1	dB
V _{TX-DIFF-PP}	Differential p-p Tx voltage swing	—	0.8	—	1.2	V, p-p
V _{TX-DIFF-PP-LOW}	Low power differential p-p Tx voltage swing	—	0.4	—	1.2	V, p-p
V _{TX-DE-RATIO-3.5dB}	Tx de-emphasis level ratio at 3.5 dB	—	3	—	4	dB
V _{TX-DE-RATIO-6dB}	Tx de-emphasis level ratio at 6 dB	—	5.5	—	6.5	dB
T _{MIN-PULSE}	Instantaneous lone pulse width	—	0.9	—	—	UI
T _{TX-RISE-FALL}	Transmitter rise and fall time	—	0.15	—	—	UI
T _{TX-EYE}	Transmitter Eye, including all jitter sources	—	0.75	—	—	UI
T _{TX-DJ}	Tx deterministic jitter > 1.5 MHz	—	—	—	0.15	UI
T _{TX-RJ}	Tx RMS jitter < 1.5 MHz	—	—	—	3	ps, RMS
T _{RF-MISMATCH}	Tx rise/fall time mismatch	—	—	—	0.1	UI
R _{LTX-DIFF}	Tx Differential Return Loss, including package and silicon	50 MHz < freq < 1.25 GHz	10	—	—	dB
		1.25 GHz < freq < 2.5 GHz	8	—	—	dB

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
R_{LTX-CM}	Tx Common Mode Return Loss, including package and silicon	50 MHz < freq < 2.5 GHz	6	—	—	dB
$Z_{TX-DIFF-DC}$	DC differential Impedance	—	—	—	120	Ω
$V_{TX-CM-AC-PP}$	Tx AC peak common mode voltage, peak-peak	—	—	—	150	mV, p-p
$I_{TX-SHORT}$	Transmitter short-circuit current	—	—	—	90	mA
$V_{TX-DC-CM}$	Transmitter DC common-mode voltage	—	0	—	1.2	V
$V_{TX-IDLE-DIFF-DC}$	Electrical Idle Output DC voltage	—	0	—	5	mV
$V_{TX-IDLE-DIFF-AC-p}$	Electrical Idle Differential Output peak voltage	—	—	—	20	mV
$V_{TX-RCV-DETECT}$	Voltage change allowed during Receiver Detect	—	—	—	600	mV
$T_{TX-IDLE-MIN}$	Min. time in Electrical Idle	—	20	—	—	ns
$T_{TX-IDLE-SET-TO-IDLE}$	Max. time from EI Order Set to valid Electrical Idle	—	—	—	8	ns
$T_{TX-IDLE-TO-DIFF-DATA}$	Max. time from Electrical Idle to valid differential output	—	—	—	8	ns
Receive²						
$L_{TX-SKEW}$	Lane-to-Lane output skew	—	—	—	500 + 4 UI	ps
UI	Unit Interval	—	199.94	200	200.06	ps
$V_{RX-DIFF-PP}$	Differential Rx peak-peak voltage	—	0.34 ³	—	1.2	V, p-p
$T_{RX-RJ-RMS}$	Receiver random jitter tolerance (RMS)	1.5 MHz – 100 MHz Random noise	—	—	4.2	ps, RMS
T_{RX-DJ}	Receiver deterministic jitter tolerance	—	—	—	88	ps
$R_{LRX-DIFF}$	Receiver differential Return Loss, package plus silicon	50 MHz < freq < 1.25 GHz	10	—	—	dB
		1.25 GHz < freq < 2.5 GHz	8	—	—	dB
R_{LRX-CM}	Receiver common mode Return Loss, package plus silicon	—	6	—	—	dB
Z_{RX-DC}	Receiver DC single ended impedance	—	40	—	60	Ω
$Z_{RX-HIGH-IMP-DC}$	Receiver DC single ended impedance when powered down	—	200K	—	—	Ω
$V_{RX-CM-AC-P^3}$	Rx AC peak common mode voltage	—	—	—	150	mV, peak
$V_{RX-IDLE-DET-DIFF-PP}$	Electrical Idle Detect Threshold	—	65	—	175 ³	mv, pp
$L_{RX-SKEW}$	Receiver –lane-lane skew	—	—	—	8	ns

Notes:

1. Refer to PCI Express Base Specification Revision 3.0 Table 4.18 test condition and requirement for respective parameters.
2. Refer to PCI Express Base Specification Revision 3.0 Table 4.24 test condition and requirement for respective parameters.
3. Spec compliant requirement.

4.29. Hardened SGMII Receiver Characteristics

4.29.1. SGMII Rx Specifications

Over recommended operating conditions.

Table 4.45. SGMII¹ Rx

Symbol	Description	Test Conditions	Min	Typ	Max	Unit
f_{DATA}	SGMII Data Rate	—	—	1250	—	MHz
f_{REFCLK}	SGMII Reference Clock Frequency (Data Rate/10)	—	—	125	—	MHz
J_{TOL_Dj}	Jitter Tolerance, Deterministic	Periodic jitter < 300 kHz	—	—	0.1 ²	UI
J_{TOL_Tj}	Jitter Tolerance, Total	Periodic jitter < 300 kHz	—	—	0.3 ²	UI
$\Delta f/f$	Data Rate and Reference Clock Accuracy	—	–300	—	300	ppm

Notes:

- The SGMII interface using LVDS I/O has limitations when operating across the full specified temperature range. Lattice recommends using alternative interfaces, such as SERDES or RGMII, for designs requiring Gigabit Ethernet. Refer to the [Knowledge Database article](#) for details. Contact your local Lattice sales representative for more information.
- J_{TOT} can meet the following jitter mask specification:
 - 0 to 3.5 kHz: 10 UI;
 - 3.5 to 700 kHz: log-log slope 10 UI to 0.05 UI;
 - above 700 kHz: 0.05 UI.

4.30. sysCONFIG Port Timing Specifications

Over recommended operating conditions.

Table 4.46. sysCONFIG Port Timing Specifications

Symbol	Parameter	Device	Min	Typ.	Max	Unit
Slave SPI/I2C/I3C POR / REFRESH Timing						
t_{MSPI_INH}	Time during POR, from V_{CC} , V_{CCAUX} , V_{CCIO0} or V_{CCIO1} (whichever is the last) pass POR trip voltage, or REFRESH command executed, to pull PROGRAMN LOW to prevent entering MSPI mode	—	—	—	1	μ s
$t_{ACT_PROGRAMN_H}$	Minimum time driving PROGRAMN HIGH after last activation clock	—	50	—	—	ns
t_{CONFIG_CCLK}	Minimum time to start driving CCLK (SSPI) after PROGRAMN HIGH	—	50	—	—	ns
t_{CONFIG_SCL}	Minimum time to start driving SCL (I2C/I3C) after PROGRAMN HIGH	—	50	—	—	ns
PROGRAMN Configuration Timing						
$t_{PROGRAMN_L}$	PROGRAMN LOW pulse accepted	—	50	—	—	ns
$t_{PROGRAMN_H}$	PROGRAMN HIGH pulse accepted	—	60	—	—	ns
$t_{PROGRAMN_RJ}$	PROGRAMN LOW pulse rejected	—	—	—	25	ns
t_{INITL}	INITN LOW to INITN HIGH (SRAM initialization period)	—	—	—	54.9	μ s
t_{INIT_LOW}	PROGRAMN LOW to INITN LOW	—	—	—	100	ns
t_{INIT_HIGH}	PROGRAMN LOW to INITN HIGH	—	—	—	55	μ s
t_{DONE_LOW}	PROGRAMN LOW to DONE LOW	—	—	—	50	μ s
t_{DONE_HIGH}	PROGRAMN HIGH to DONE HIGH	—	—	—	2	s
t_{IODISS}	PROGRAMN LOW to I/O Disabled	—	—	—	125	ns

Symbol	Parameter	Device	Min	Typ.	Max	Unit
Slave SPI						
$f_{\text{CCLK_W}}$	CCLK input clock frequency (For write transaction) ²	—	—	—	120	MHz
$f_{\text{CCLK_R}}$	CCLK input clock frequency (For read transaction) ³	—	—	—	— ⁴	MHz
t_{CCLKH}	CCLK input clock pulse width HIGH	—	3.5	—	—	ns
t_{CCLKL}	CCLK input clock pulse width LOW	—	3.5	—	—	ns
$t_{\text{VMC_SLAVE}}$	Time from rising edge of INITN to Slave CCLK driven	—	50	—	—	ns
$t_{\text{VMC_MASTER}}$	CCLK input clock duty cycle	—	40	—	60	%
$t_{\text{SU_SSI}}$	SSI to CCLK setup time	—	3.2	—	—	ns
$t_{\text{HD_SSI}}$	SSI to CCLK hold time	—	1.9	—	—	ns
$t_{\text{CO_SSO}}$	CCLK falling edge to valid SSO output	—	3.0 ⁵	—	30 ⁵	ns
$t_{\text{EN_SSO}}$	CCLK falling edge to SSO output enabled	—	3.0 ⁵	—	30 ⁵	ns
$t_{\text{DIS_SSO}}$	CCLK falling edge to SSO output disabled	—	3.0 ⁵	—	30 ⁵	ns
$t_{\text{HIGH_SCSN}}$	SCSN HIGH time	—	74	—	—	ns
$t_{\text{SU_SCSN}}$	SCSN to CCLK setup time	—	3.5	—	—	ns
$t_{\text{HD_SCSN}}$	SCSN to CCLK hold time	—	1.6	—	—	ns
I2C/I3C						
$f_{\text{SCL_I2C}}$	SCL input clock frequency for I2C	—	—	—	1	MHz
$f_{\text{SCL_I3C}}$	SCL input clock frequency for I3C	—	—	—	12	MHz
$t_{\text{SCLH_I2C}}$	SCL input clock pulse width HIGH for I2C	—	400	—	—	ns
$t_{\text{SCLL_I2C}}$	SCL input clock pulse width LOW for I2C	—	400	—	—	ns
$t_{\text{SU_SDA_I2C}}$	SDA to SCL setup time for I2C	—	250	—	—	ns
$t_{\text{HD_SDA_I2C}}$	SDA to SCL hold time for I2C	—	50	—	—	ns
$t_{\text{SU_SDA_I3C}}$	SDA to SCL setup time for I3C	—	30	—	—	ns
$t_{\text{HD_SDA_I3C}}$	SDA to SCL hold time for I3C	—	30	—	—	ns
$t_{\text{CO_SDA}}$	SCL falling edge to valid SDA output	—	—	—	200	ns
$t_{\text{EN_SDA}}$	SCL falling edge to SDA output enabled	—	—	—	200	ns
$t_{\text{DIS_SDA}}$	SCL falling edge to SDA output disabled	—	—	—	200	ns
Wake-Up Timing						
$t_{\text{DONE_HIGH}}$	Last configuration clock cycle to DONE going HIGH	—	—	—	60	μs
$t_{\text{FIO_EN}}^1$	User I/O enabled in Fast I/O Mode	—	—	31.104	—	M cycles
t_{IOEN}^1	Config clock to user I/O enabled	—	130	—	—	ns

Notes:

- Based on 30k uncompressed/unauthenticated/default MCLK timing (3.5 MHz)/x1. Other permutations result in different values.
- Supported input clock frequency for bursting in configuration bitstream to the device.
- Supported input clock frequency for reading out data transactions from the device.
- Refer to the following equations to determine the supported input clock frequency for read transaction. Assumption: The skew between CCLK and SSO on board is zero.

$$\frac{1}{2} \text{CCLK} - t_{\text{CO}}(\text{max}) - T_{\text{su}} > 0$$

$$\text{CCLK} > 2(t_{\text{CO}}(\text{max}) + T_{\text{su}})$$

CCLK – Input clock period. $f_{\text{CCLK_R}} = 1/\text{CCLK}$.

$t_{\text{CO}}(\text{max})$ – Equivalent to $t_{\text{CO_SSO}}$ or $t_{\text{EN_SSO}}$ max value.

T_{su} – Setup time requirement for host controller I/O.

For customer that can only use single clock for read/write operation, the Fmax is limited by the Fmax for read operation.

For example: $t_{\text{CO}}(\text{max}) = 30 \text{ ns}$ and $T_{\text{su}} = 2 \text{ ns}$.

$$CCLK > 2(t_{CO(max)} + T_{su})$$

$$CCLK > 2(30\text{ ns} + 2\text{ ns})$$

$$CCLK > 64\text{ ns}$$

$$f_{CCLK_R} = \frac{1}{64\text{ ns}} = 15.62\text{ MHz}$$

For the customer that wants to do the programming at 135 MHz or faster than Fmax for read operation:

- Have a mechanism in the host controller to switch between read clock and write clock for read/write transaction. For example, refer to SPI specification to switch between read and write clock by changing the SPI Baud Rate Register (SPIBR) if standard SPI controller is used as the host.
 - Implementing a mechanism to adjust/calibrate the sampling clock edge when the valid data becomes available.
5. Based on SLOW (default) slew rate control on Config output pins.

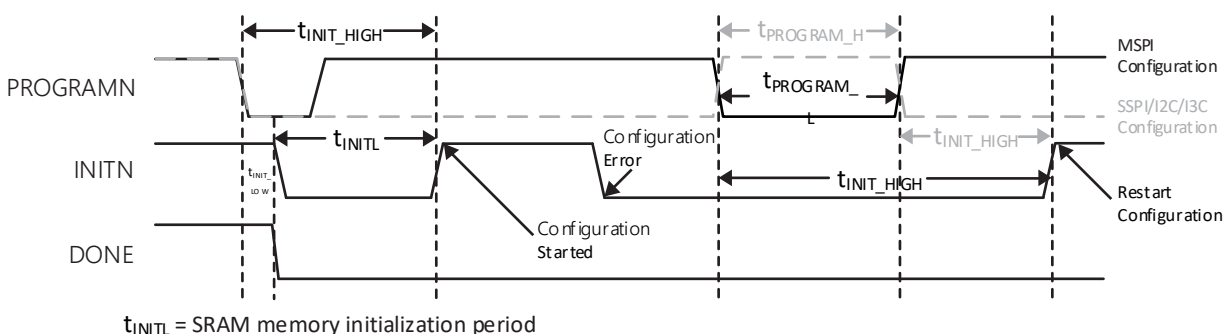


Figure 4.14. Configuration Error Notification (2)

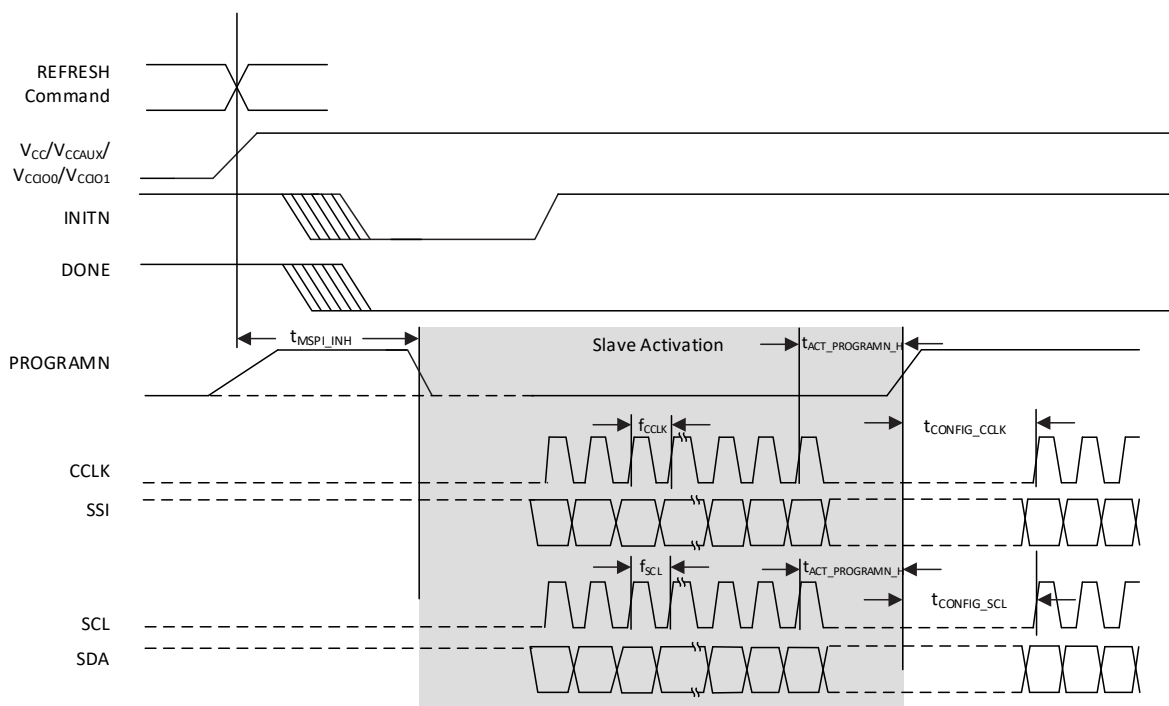


Figure 4.15. Slave SPI/I2C/I3C POR/REFRESH Timing

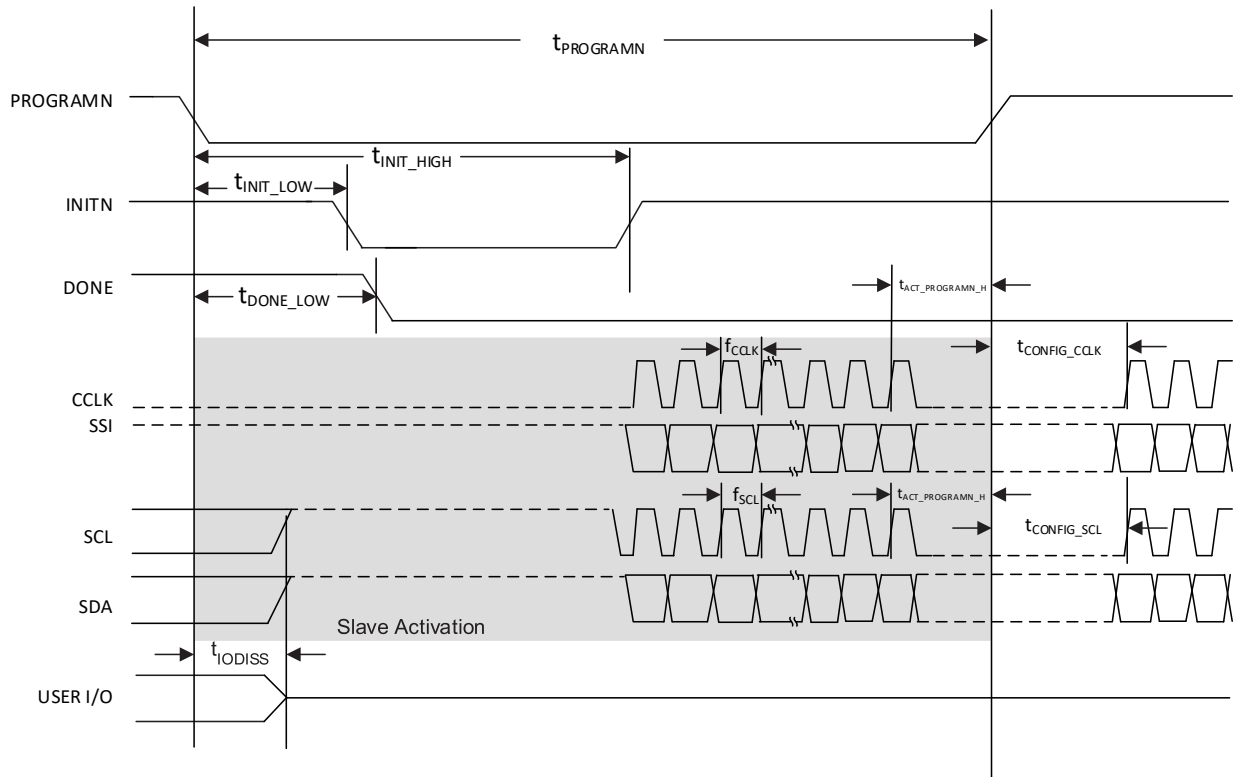


Figure 4.16. Slave SPI/I2C/I3C PROGRAMN Timing

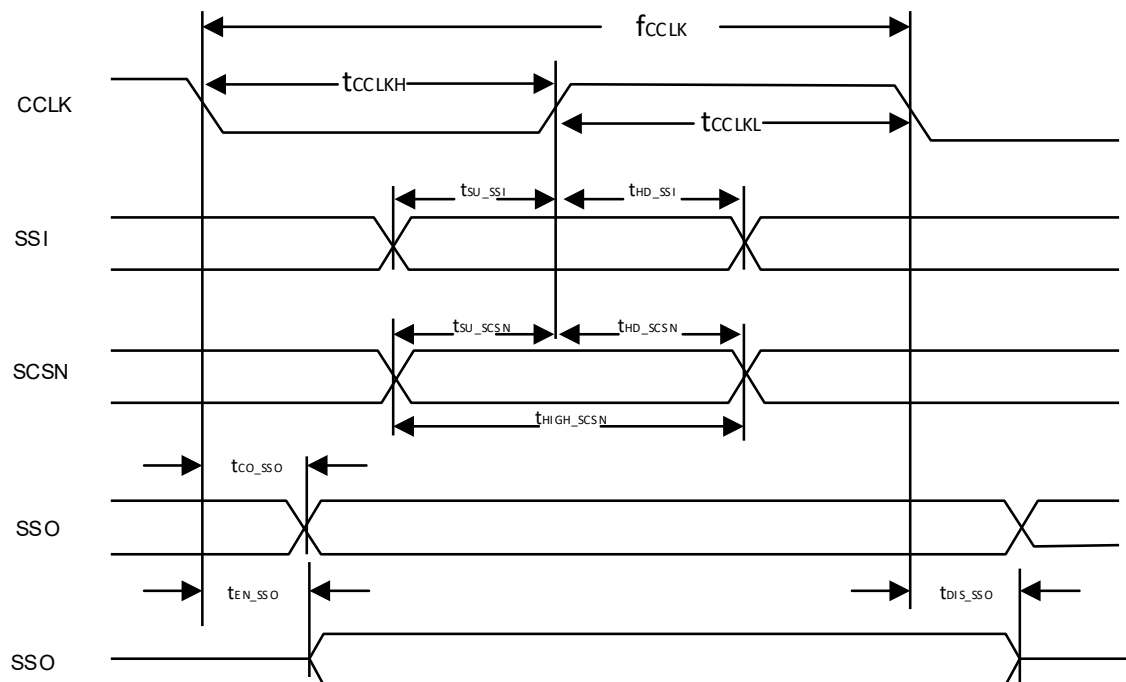


Figure 4.17. Slave SPI Configuration Timing

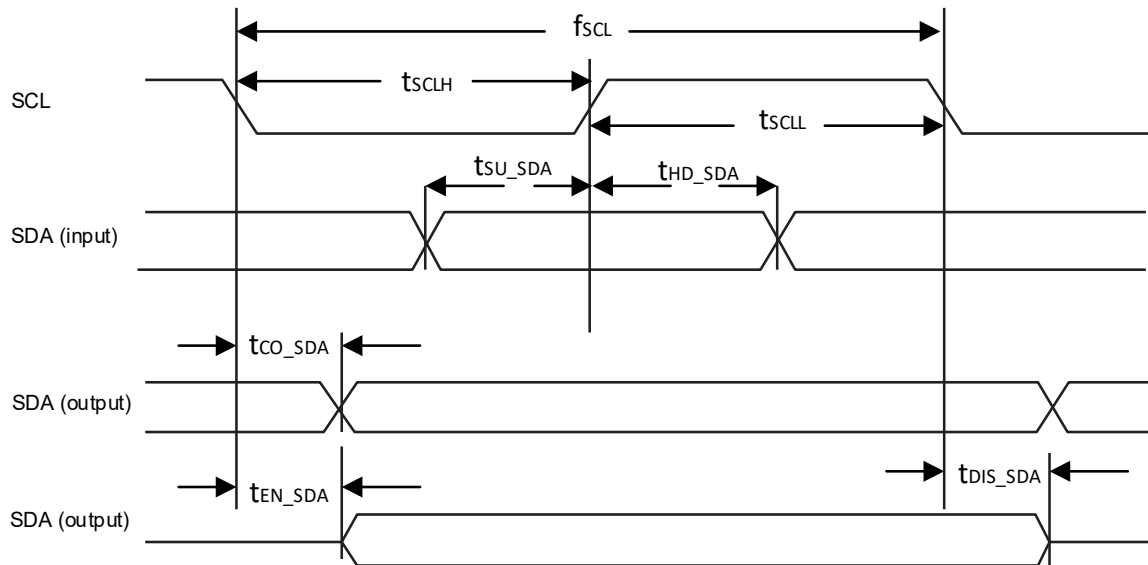


Figure 4.18. I2C/I3C Configuration Timing

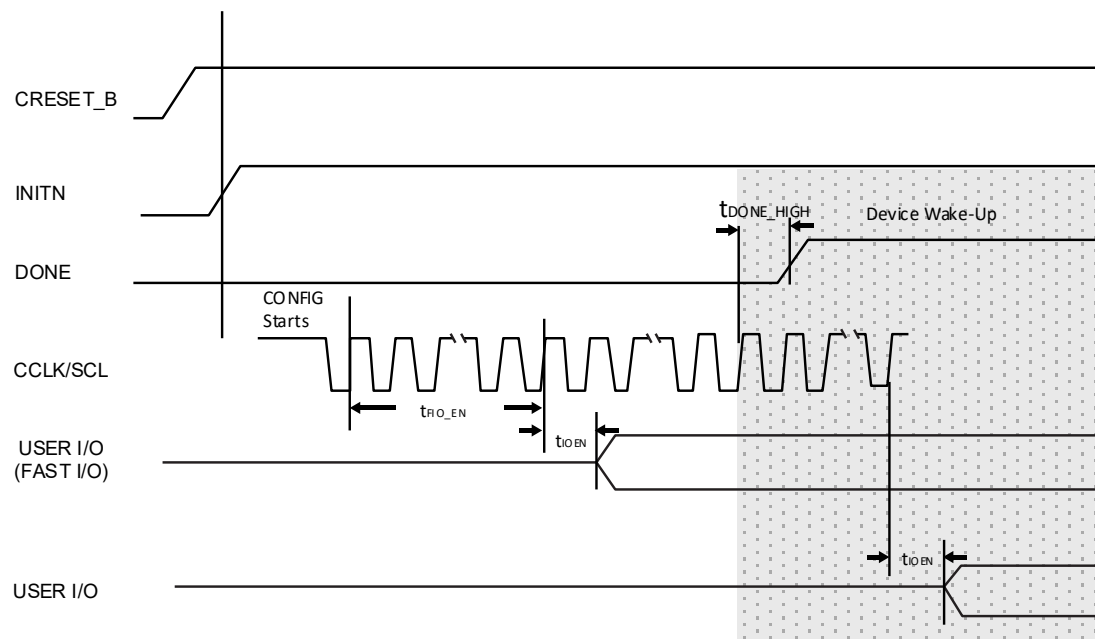


Figure 4.19. Slave SPI/I2C/I3C Wake-Up Timing

4.31. JTAG Port Timing Specifications

Over recommended operating conditions.

Table 4.47. JTAG Port Timing Specifications

Symbol	Parameter	Min	Typ.	Max	Units
f_{MAX}	TCK clock frequency	—	—	25	MHz
t_{BTCPH}	TCK clock pulse width high	20	—	—	ns
t_{BTCPL}	TCK clock pulse width low	20	—	—	ns
t_{BTS}	TCK TAP setup time	5	—	—	ns
t_{BTH}	TCK TAP hold time	5	—	—	ns
t_{BTRF}	TAP controller TDO rise/fall time ¹	1000	—	—	mV/ns
t_{BTCO}	TAP controller falling edge of clock to valid output	—	—	14	ns
$t_{BTCODIS}$	TAP controller falling edge of clock to valid disable	—	—	14	ns
t_{BTCOEN}	TAP controller falling edge of clock to valid enable	—	—	14	ns
t_{BTCRS}	BSCAN test capture register setup time	8	—	—	ns
t_{BTCRH}	BSCAN test capture register hold time	25	—	—	ns
t_{BUTCO}	BSCAN test update register, falling edge of clock to valid output	—	—	25	ns
$t_{BTUODIS}$	BSCAN test update register, falling edge of clock to valid disable	—	—	25	ns
$t_{BTUPOEN}$	BSCAN test update register, falling edge of clock to valid enable	—	—	25	ns

Note:

1. Based on default I/O setting of slow slew rate.


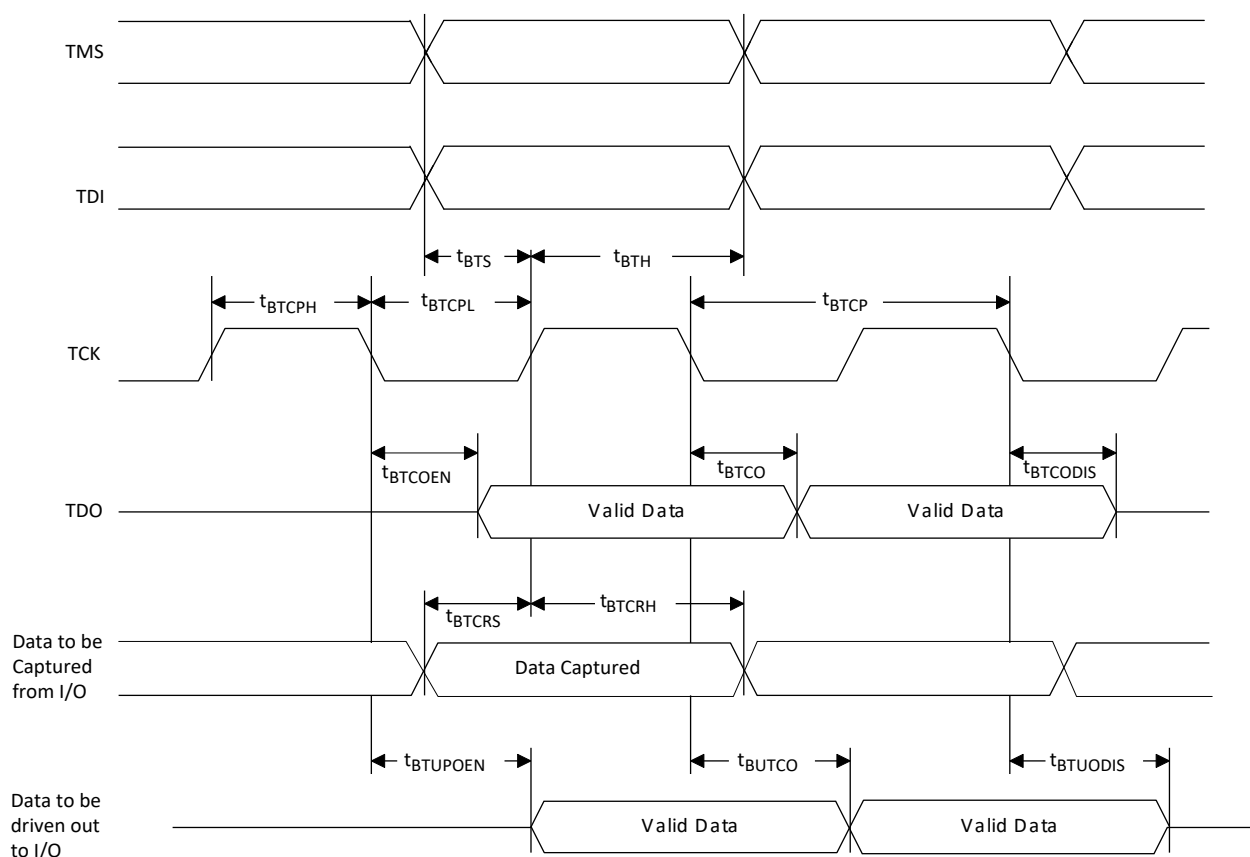


Figure 4.20. JTAG Port Timing Waveforms

4.32. Switching Test Conditions

Figure 4.21 shows the output test load that is used for AC testing. The specific values for resistance, capacitance, voltage, and other test conditions are listed in Table 4.48.

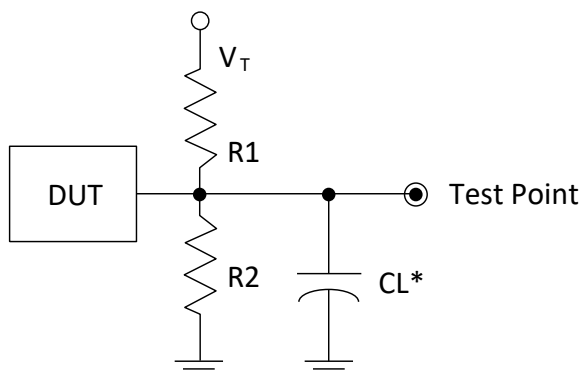

*CL Includes Test Fixture and Probe Capacitance

Figure 4.21. Output Test Load, LVTTTL and LVCMOS Standards

Table 4.48. Test Fixture Required Components, Non-Terminated Interfaces

Test Condition	R ₁	R ₂	C _L	Timing Ref.	V _T
LVTTTL and other LVCMOS settings (L to H, H to L)	∞	∞	0 pF	LVCMOS 3.3 = 1.5 V	—
				LVCMOS 2.5 = V _{CCIO} /2	—
				LVCMOS 1.8 = V _{CCIO} /2	—
				LVCMOS 1.5 = V _{CCIO} /2	—
				LVCMOS 1.2 = V _{CCIO} /2	—
LVCMOS 2.5 I/O (Z to H)	∞	1 M Ω	0 pF	V _{CCIO} /2	—
LVCMOS 2.5 I/O (Z to L)	1 M Ω	∞	0 pF	V _{CCIO} /2	V _{CCIO}
LVCMOS 2.5 I/O (H to Z)	∞	100	0 pF	V _{OH} - 0.10	—
LVCMOS 2.5 I/O (L to Z)	100	∞	0 pF	V _{OL} + 0.10	V _{CCIO}

Note: Output test conditions for all other interfaces are determined by the respective standards.

5. Pinout Information

5.1. Signal Descriptions

Table 5.1. Signal Descriptions

Signal Name	Bank	Type	Description
Power and GND			
V _{SS}	—	GND	Ground for internal FPGA logic and I/O
V _{SSSD}	—	GND	Ground for the SERDES block.
V _{SSADC}	—	GND	Ground for the ADC block.
V _{CC} , V _{CCECLK}	—	Power	Power supply pins for core logic. V _{CC} is connected to 1.0 V (nom.) supply voltage. Power On Reset (POR) monitors this supply voltage.
V _{CCAUXA}	—	Power	Auxiliary power supply pin for internal analog circuitry. This supply is connected to 1.8 V (nom.) supply voltage.
V _{CCAUX}	—	Power	Auxiliary power supply pin for I/O Bank 0, Bank 1, Bank 2, Bank 3, Bank 4, Bank 7, Bank 8 and Bank 9. This supply is connected to 1.8 V (nom.) supply voltage, and is used for generating stable drive current for the I/O. POR monitors this supply voltage.
V _{CCAUXHx}	—	Power	Auxiliary power supply pin for I/O Bank 5 and Bank 6. This supply is connected to 1.8 V (nom.) supply voltage, and is used for generating stable current for the differential input comparators.
V _{CCIOx}	0-9	Power	Power supply pins for I/O bank x. LFMXO5-25: Bank 1: 3.3 V only Banks 0, 2, 3, 4, 7, 8, 9: 1.2 V, 1.35 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V Banks 5, 6: 1.0 V, 1.2 V, 1.35 V, 1.5 V, and 1.8 V LFMXO5-55T/100T: Bank 0: 3.3 V only Banks 1, 2, 6, 7: 1.2 V, 1.35 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V Banks 3, 4, 5: 1.0 V, 1.2 V, 1.35 V, 1.5 V, and 1.8 V LFMXO5-35/T and LFMXO5-65/T: Bank 1: 3.3 V only Banks 0, 2, 3, 4, 7, 8, 9, 11: 1.2 V, 1.35 V, 1.5 V, 1.8 V, 2.5 V, and 3.3 V Banks 5, 6: 1.0 V, 1.2 V, 1.35 V, and 1.8 V There are dedicated and shared configuration pins in different banks as follows: - LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-25: Banks 1 and 2; - LFMXO5-55T/100T: Banks 0 and 1. POR monitors these banks supply voltages.
V _{CCADC18}	—	Power	1.8 V (nom.) power supply for the ADC block.
V _{CCSDx}	—	Power	1.0 V (nom.) power supply for the SERDES block.
V _{CCSDCK}	—	Power	1.0 V (nom.) power supply for SERDES clock buffer.
V _{CCPLLSdx}	—	Power	1.8 V (nom.) power supply for the PLL in the SERDES block.
V _{CCAUXSDQx}	—	Power	1.8 V (nom.) auxiliary power supply for the SERDES block.
Dedicated Pins			
Dedicated Configuration I/O Pin			
JTAG_EN	2/1	Input	LVC MOS input pin. This input selects the JTAG shared GPIO to be used for JTAG 0 = GPIO 1 = JTAG On Bank 2 for MachXO5-NX 25 devices On Bank 1 for MachXO5-NX 55T/100T devices

Signal Name	Bank	Type	Description
Dedicated ADC I/O Pins			
ADC_REF[0, 1]	—	Input	ADC reference voltage, for each of the 2 ADC converters. If not used, tie to ground.
ADC_DP/N[0, 1]	—	Input	Dedicated ADC input pairs, for each of the 2 ADC converters. If not used, tie to ground.
Misc Pins			
NC	—	—	No connect.
RESERVED	—	—	This pin is reserved and should not be connected to anything on the
General Purpose I/O Pins			
P[T/B/L/R] [Number]_[A/B]	Top, Bottom, Left, Right	Input, Output, Bi-Dir	Programmable User I/O: [T/B/L/R] indicates the package pin/ball is in T (Top), B (Bottom), L (Left), or R (Right) edge of the device. [Number] identifies the PIO [A/B] pair. [A/B] shows the package pin/ball is A or B signal in the pair. PIO A and PIO B are grouped as a pair. Each A/B pair in the bottom banks supports true differential input and output buffers. When configured as differential input, differential termination of 100 Ω can be selected. Each A/B pair in the top, left and right banks does not support true differential input or output buffer. It supports all single-ended inputs and outputs, and can be used for emulated differential output buffer. Some of these user-programmable I/O are used during configuration, depending on the configuration mode. You need to make appropriate connection on the board to isolate the 2 different functions before/after configuration. Some of these user-programmable I/O are shared with special function pins. These pins, when not used as special purpose pins, can be programmed as I/O for user logic. During configuration the user-programmable I/O are tri-stated with an internal weak pull-down resistor enabled. If any pin is not used (or not bonded to a package pin), it is tri-stated and default to have weak pull-down enabled after configuration.
Shared Configuration Pins^{1, 2} - These pins can be used for configuration during configuration mode. When configuration is completed, these pins can be used as GPIO, or shared function in GPIO. When these pins are used in dual function, you need to isolate the signal paths for the dual functions on the board. - The pins used are defined by the configuration modes detected. Slave SPI or I2C/I3C modes are detected during slave activation. Pins that are not used in the configuration mode selected are tri-stated during configuration, and can connect directly as GPIO in user's function.			
PRxxx /SDA/USER_SDA	Right	Input, Output, Bi-Dir	Configuration: I2C/I3C Mode: SDA signal User Mode: PRxxx: GPIO User_SDA: SDA signal for I2C/I3C interface
PRxxx /SCL/USER_SCL	Right	Input, Output, Bi-Dir	Configuration: I2C/I3C Mode: SCL signal User Mode: PRxxx: GPIO User_SDA: SCL signal for I2C/I3C interface

Signal Name	Bank	Type	Description
PRxxx/TDO/SSO	Right	Input, Output, Bi-Dir	Configuration: Slave SPI Mode: Slave Serial Output User Mode: PRxxx: GPIO TDO: When JTAG_EN = 1, used as TDO signal for JTAG
PRxxx/TDI/SSI	Right	Input, Output, Bi-Dir	Configuration: Slave SPI Mode: Slave Serial Input User Mode: PRxxx: GPIO TDI: When JTAG_EN = 1, used as TDI signal for JTAG
PRxxx/TMS/SCSN	Right	Input, Output, Bi-Dir	Configuration: Slave SPI Mode: Slave Chip Select User Mode: PRxxx: GPIO TMS: When JTAG_EN = 1, used as TMS signal for JTAG
PRxxx/TCK/SCLK	Right	Input, Output, Bi-Dir	Configuration: Slave SPI Mode: Slave Clock Input User Mode: PRxxx: GPIO TCK: When JTAG_EN = 1, used as TCK signal for JTAG
PTxxx/MCSNO	Top	Input, Output, Bi-Dir	Configuration: Flow-through Daisy Chain Mode: Chip Select Output User Mode: PTxxx: GPIO
PTxxx/PROGRAMN	Top	Input, Output, Bi-Dir	Configuration: PROGRAMN: Initiate configuration sequence when asserted LOW. User Mode: PTxxx: GPIO
PTxxx/INITN	Top	Input, Output, Bi-Dir	Configuration: INITN: Open Drain I/O pin. This signal is driven to LOW when configuration sequence is started, to indicate the device is in initialization state. This signal is released after initialization is completed, and the configuration download can start. You can keep drive this signal LOW to delay configuration download to start. User Mode: PTxxx: GPIO
PTxxx/DONE	Top	Input, Output, Bi-Dir	Configuration: DONE: Open Drain I/O pin. This signal is driven to LOW during configuration time. It is released to indicate the device has completed configuration. You can keep drive this signal LOW to delay the device to wake up from configuration. User Mode: PTxxx: GPIO
Shared User GPIO Pins^{1, 2, 3, 4} 3. Shared User GPIO pins are pins that can be used as GPIO, or functional pins that connect directly to specific functional blocks, when device enters into User Mode. 4. Declaring on assigning the pin as GPIO or specific functional pin is done by configuration bitstream, except JTAG pins. 5. JTAG pins are controlled by JTAG_EN signal. When JTAG_EN = 1, the pins are used for JTAG interface. When JTAG = 0, the pins are used as GPIO or specific functional pin defined by configuration bitstream. 6. Refer to package pin file.			

Signal Name	Bank	Type	Description
Shared JTAG Pins			
PRxxx/TDO/ yyyy	Right	Input, Output, Bi-Dir	User Mode: PRxxx: GPIO TDO: When JTAG_EN = 1, used as TDO signal for JTAG yyyy: Other possible selectable specific functional
PRxxx/TDI/yyyy	Right	Input, Output, Bi-Dir	User Mode: PRxxx: GPIO TDI: When JTAG_EN = 1, used as TDI signal for JTAG yyyy: Other possible selectable specific functional
PRxxx/TMS/ yyyy	Right	Input, Output, Bi-Dir	User Mode: PRxxx: GPIO TMS: When JTAG_EN = 1, used as TMS signal for JTAG yyyy: Other possible selectable specific functional
PRxxx/TCK/ yyyy	Right	Input, Output, Bi-Dir	User Mode: PRxxx: GPIO TCK: When JTAG_EN = 1, used as TCK signal for JTAG Yyyy: Other possible selectable specific functional
Shared CLOCK Pins¹			
1. Some PCLK pins can also be used as GPLL reference clock input pin. Refer to sysCLOCK PLL/DLL Design and User Guide for Nexus Platform (FPGA-TN-02095) .			
PBxxx/PCLK[T,C][X-Y]_[0-3]/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO PCLK: Primary Clock or GPLL Refclk signal [T] = For single-ended signaling, use only PCLKT pins as primary CLK pads. [T,C] = True/Complement when using differential signaling [0-3] Up to 4 signals in the bank
PTxxx/PCLKT[0,1]_[X-Y]/yyyy	Top	Input, Output, Bi-Dir	User Mode: PTxxx: GPIO PCLKT: Primary Clock or GPLL Refclk signal (Only Single Ended) [0-1] Up to 2 signals in the bank yyyy: Other possible selectable specific functional
PRxxx/PCLKT[X-Y]_[0-2]/yyyy	Right	Input, Output, Bi-Dir	User Mode: PRxxx: GPIO PCLKT: Primary Clock or GPLL Refclk signal (Only Single Ended) [0-2] Up to 3 signals in the bank yyyy: Other possible selectable specific functional
PLxxx/PCLKT[X-Y]_[0-2]/yyyy	Left	Input, Output, Bi-Dir	User Mode: PLxxx: GPIO PCLKT: Primary Clock or GPLL Refclk signal (Only Single Ended) [0-2] Up to 3 signals in the bank yyyy: Other possible selectable specific functional
PBxxx/LRC_GPLL[T,C]_IN/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO LRC_GPLL: Lower Right GPLL Refclk signal (PLLCK) [T,C] = True/Complement when using differential signaling yyyy: Other possible selectable specific functional

Signal Name	Bank	Type	Description
PLxxx/ULC_GPLLT_IN/yyyy	Left	Input, Output, Bi-Dir	User Mode: PLxxx: GPIO ULC_GPLL: Upper Left GPLL Refclk signal (Only Single Ended) (PLLCK) yyyy: Other possible selectable specific functional
Shared VREF Pins			
PBxxx/VREF[5,6]_[1-2]/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO VREF: Reference Voltage for DDR memory function [1-2] Up to VREFs for each bank yyyy: Other possible selectable specific functional
Shared ADC Pins			
PBxxx/ADC_C[P,N]nn/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO ADC_C: ADC Channel Inputs [P,N] = Positive or Negative Input nn = ADC Channel number (0 – 15) yyyy: Other possible selectable specific functional
Shared Comparator Pins			
PBxxx/COMP[1-3][P,N]/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO COMP: Differential Comparator Input [P,N] = Positive or Negative Input [1-3] = Input to Comparators 1-3 yyyy: Other possible selectable specific functional
Shared SGMII Pins			
PBxxx/SGMII_RX[P,N][0-1]/yyyy	Bottom	Input, Output, Bi-Dir	User Mode: PBxxx: GPIO SGMII_RX: Differential SGMII RX Inputs [P,N] = Positive or Negative Input [0-1] = Input to SGMII RX0 or RX1 yyyy: Other possible selectable specific functional

Note: Not all signals are available as external pins in all packages. Refer to the Pinout List file for various package details.

5.2. Pin Information Summary

Table 5.2. Pin Information Summary of LFMXO5-25, LFMXO5-55T, and LFMXO5-100T

Pin		LFMXO5-25		LFMXO5-55T	LFMXO5-100T
		BBG256	BBG400	BBG400	BBG400
User I/O Pins					
General Purpose Inputs/Outputs per Bank	Bank 0	24	40	18	18
	Bank 1	32	36	39	39
	Bank 2	23	31	32	32
	Bank 3	16	32	48	48
	Bank 4	12	24	48	48
	Bank 5	20	24	36	36
	Bank 6	20	24	32	32
	Bank 7	12	24	38	38
	Bank 8	16	32	0	0
	Bank 9	24	32	0	0
Total Single-Ended User I/O		199	299	291	291
Differential Input/Output Pairs	Bank 0	12	20	9	9
	Bank 1	16	18	19	19
	Bank 2	11	15	16	16
	Bank 3	8	16	24	24
	Bank 4	6	12	24	24
	Bank 5	10	12	18	18
	Bank 6	10	12	16	16
	Bank 7	6	12	19	19
	Bank 8	8	16	0	0
	Bank 9	12	16	0	0
Total Differential I/O		99	149	145	145
Power Pins					
V _{CC} , V _{CCECLK}		4	6	10	10
V _{CCAUXA}		2	2	1	1
V _{CCAUX}		2	3	2	2
V _{CCAUXHx}		2	2	3	3
V _{CCAUXSDQx}		0	0	1	1
V _{CCIO}	Bank 0	2	3	1	1
	Bank 1	2	3	2	2
	Bank 2	2	2	1	1
	Bank 3	1	2	3	3
	Bank 4	1	2	3	3
	Bank 5	2	2	2	2
	Bank 6	2	2	1	1
	Bank 7	1	2	2	2
	Bank 8	1	2	0	0
	Bank 9	2	2	0	0
V _{CCSDx}		0	0	3	3
V _{CCPLLS Dx}		0	0	2	2
V _{CCADC18}		1	1	1	1
Total Power Pins		27	36	38	38
GND Pins					
V _{SS}		22	30	23	23
V _{SSADC}		1	1	1	1
V _{SSSDQ}		0	0	22	22
Total GND Pins		23	31	46	46

Pin		LFMXO5-25		LFMXO5-55T	LFMXO5-100T
		BBG256	BBG400	BBG400	BBG400
Dedicated Pins					
Dedicated ADC Channels (pairs)		2	2	2	2
Dedicated ADC Reference Voltage Pins		2	2	2	2
Dedicated SERDES Pins		0	0	18	18
Dedicated Misc Pins					
JTAGEN		1	1	1	1
NC		0	27	0	0
RESERVED		0	0	0	0
Total Dedicated Pins		13	34	25	25
Shared Pins					
Shared Configuration Pins	Bank 0	0	0	4	4
	Bank 1	4	4	6	6
	Bank 2	6	6	0	0
	Bank 3	0	0	0	0
	Bank 4	0	0	0	0
	Bank 5	0	0	0	0
	Bank 6	0	0	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0
Shared JTAG Pins	Bank 0	0	0	0	0
	Bank 1	0	0	4	4
	Bank 2	4	4	0	0
	Bank 3	0	0	0	0
	Bank 4	0	0	0	0
	Bank 5	0	0	0	0
	Bank 6	0	0	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0
Shared PCLK Pins	Bank 0	2	2	0	0
	Bank 1	2	2	3	3
	Bank 2	3	3	3	3
	Bank 3	2	2	8	8
	Bank 4	2	2	8	8
	Bank 5	8	8	8	8
	Bank 6	8	8	3	3
	Bank 7	2	2	3	3
	Bank 8	2	2	0	0
	Bank 9	0	3	0	0
Shared GPLL Pins	Bank 0	0	0	0	0
	Bank 1	0	0	2	2
	Bank 2	0	0	0	0
	Bank 3	0	0	2	2
	Bank 4	0	0	2	2
	Bank 5	2	2	2	2
	Bank 6	0	0	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	1	1	0	0

Pin		LFMXO5-25		LFMXO5-55T	LFMXO5-100T
		BBG256	BBG400	BBG400	BBG400
Shared VREF Pins	Bank 0	0	0	0	0
	Bank 1	0	0	0	0
	Bank 2	0	0	0	0
	Bank 3	0	0	2	2
	Bank 4	0	0	2	2
	Bank 5	2	2	2	2
	Bank 6	2	2	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0
Shared ADC Channels (Pairs)	Bank 0	0	0	0	0
	Bank 1	0	0	0	0
	Bank 2	0	0	0	0
	Bank 3	0	0	8	8
	Bank 4	0	0	4	4
	Bank 5	5	7	4	4
	Bank 6	8	9	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0
Shared Comparator Channels (Pairs)	Bank 0	0	0	0	0
	Bank 1	0	0	0	0
	Bank 2	0	0	0	0
	Bank 3	0	0	3	3
	Bank 4	0	0	0	0
	Bank 5	3	3	3	3
	Bank 6	3	3	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0
Shared SGMII Channels (Pairs)	Bank 0	0	0	0	0
	Bank 1	0	0	0	0
	Bank 2	0	0	0	0
	Bank 3	0	0	0	0
	Bank 4	0	0	0	0
	Bank 5	0	0	2	2
	Bank 6	2	2	0	0
	Bank 7	0	0	0	0
	Bank 8	0	0	0	0
	Bank 9	0	0	0	0

Table 5.3. Pin Information Summary of LFMXO5-35, LFMXO5-35T, LFMXO5-65, and LFMXO5-65T

Pin		LFMXO5-35	LFMXO5-35T		LFMXO5-65	LFMXO5-65T	
		BBG400	BBG256	BBG484	BBG400	BBG256	BBG484
User I/O Pins							
General Purpose Inputs/Outputs per Bank	Bank 0	40	19	40	40	19	40
	Bank 1	36	24	36	36	24	36
	Bank 2	35	21	37	35	21	37
	Bank 3	32	14	38	32	14	38
	Bank 4	28	10	36	28	10	36
	Bank 5	24	14	24	24	14	24
	Bank 6	24	16	24	24	16	24
	Bank 7	29	12	32	29	12	32
	Bank 8	32	13	38	32	13	38
	Bank 9	32	24	40	32	24	40
	Bank 11	—	—	20	—	—	20
Total Single-Ended User I/O		312	167	365	312	167	365
Differential Input/Output Pairs	Bank 0	20	9	20	20	9	20
	Bank 1	18	12	18	18	12	18
	Bank 2	17	10	18	17	10	18
	Bank 3	16	7	19	16	7	19
	Bank 4	14	5	18	14	5	18
	Bank 5	12	7	12	12	7	12
	Bank 6	12	8	12	12	8	12
	Bank 7	14	6	16	14	6	16
	Bank 8	16	6	19	16	6	19
	Bank 9	16	12	20	16	12	20
	Bank 11	—	—	10	—	—	10
Total Differential I/O		155	82	182	155	82	182
Power Pins							
V _{CC} , V _{CC} CLK		14	12	19	14	12	19
V _{CCAUXA}		2	2	2	2	2	2
V _{CCAUX}		3	2	3	3	2	3
V _{CCAUXHx}		2	2	2	2	2	2
V _{CCAUXSDQx}		—	1	1	—	1	1
V _{CCIO}	Bank 0	3	2	2	3	2	2
	Bank 1	3	2	2	3	2	2
	Bank 2	2	2	2	2	2	2
	Bank 3	2	1	2	2	1	2
	Bank 4	2	1	2	2	1	2
	Bank 5	2	2	2	2	2	2
	Bank 6	2	2	2	2	2	2
	Bank 7	2	1	2	2	1	2
	Bank 8	2	1	2	2	1	2
	Bank 9	2	2	2	2	2	2
	Bank 11	—	—	2	—	—	2
V _{CCSDx}		—	1	1	—	1	1
V _{CCPLL_ULC}		1	1	1	1	1	1
V _{CCPLLSDx}		—	1	1	—	1	1
V _{CCADC18}		1	1	1	1	1	1

Pin		LFMXO5-35	LFMXO5-35T		LFMXO5-65	LFMXO5-65T	
		BBG400	BBG256	BBG484	BBG400	BBG256	BBG484
Total Power Pins		45	39	53	45	39	53
GND Pins							
Vss		36	28	44	36	28	44
VssADC		0	0	0	0	0	0
VssSDQ		0	7	7	0	7	7
Total GND Pins		36	35	51	36	35	51
Dedicated Pins							
Dedicated ADC Channels (pairs)		2	2	2	2	2	2
Dedicated ADC Reference Voltage Pins		2	2	2	2	2	2
Dedicated SERDES Pins		—	8	8	—	8	8
Dedicated Misc Pins							
JTAGEN		1	1	1	1	1	1
NC		0	0	0	0	0	0
RESERVED		0	0	0	0	0	0
Total Dedicated Pins		7	15	15	7	15	15
Shared Pins							
Shared Configuration Pins	Bank 0	0	0	0	0	0	0
	Bank 1	4	4	4	4	4	4
	Bank 2	2	2	2	2	2	2
	Bank 3	0	0	0	0	0	0
	Bank 4	0	0	0	0	0	0
	Bank 5	0	0	0	0	0	0
	Bank 6	0	0	0	0	0	0
	Bank 7	0	0	0	0	0	0
	Bank 8	0	0	0	0	0	0
	Bank 9	0	0	0	0	0	0
	Bank 11	—	—	0	—	—	0
Shared JTAG Pins	Bank 0	0	0	0	0	0	0
	Bank 1	0	0	0	0	0	0
	Bank 2	4	4	4	4	4	4
	Bank 3	0	0	0	0	0	0
	Bank 4	0	0	0	0	0	0
	Bank 5	0	0	0	0	0	0
	Bank 6	0	0	0	0	0	0
	Bank 7	0	0	0	0	0	0
	Bank 8	0	0	0	0	0	0
	Bank 9	0	0	0	0	0	0
	Bank 11	—	—	0	—	—	0


Pin		LFMXO5-35	LFMXO5-35T		LFMXO5-65	LFMXO5-65T	
		BBG400	BBG256	BBG484	BBG400	BBG256	BBG484
Shared PCLK Pins	Bank 0	2	2	2	2	2	2
	Bank 1	2	2	2	2	2	2
	Bank 2	3	3	3	3	3	3
	Bank 3	2	2	2	2	2	2
	Bank 4	2	2	2	2	2	2
	Bank 5	8	8	8	8	8	8
	Bank 6	8	8	8	8	8	8
	Bank 7	2	2	2	2	2	2
	Bank 8	2	2	2	2	2	2
	Bank 9	3	2	3	3	2	3
	Bank 11	—	—	0	—	—	0
Shared GPLL Pins	Bank 0	0	0	0	0	0	0
	Bank 1	0	0	0	0	0	0
	Bank 2	0	0	0	0	0	0
	Bank 3	0	0	0	0	0	0
	Bank 4	0	0	0	0	0	0
	Bank 5	2	2	2	2	2	2
	Bank 6	0	0	0	0	0	0
	Bank 7	0	0	0	0	0	0
	Bank 8	0	0	0	0	0	0
	Bank 9	1	1	1	1	1	1
	Bank 11	—	—	0	—	—	0
Shared VREF Pins	Bank 0	0	0	0			0
	Bank 1	0	0	0			0
	Bank 2	0	0	0			0
	Bank 3	0	0	2			2
	Bank 4	0	0	2			2
	Bank 5	2	2	2			2
	Bank 6	2	2	0			0
	Bank 7	0	0	0			0
	Bank 8	0	0	0			0
	Bank 9	0	0	0			0
Shared ADC Channels (Pairs)	Bank 0	0	0	0			0
	Bank 1	0	0	0			0
	Bank 2	0	0	0			0
	Bank 3	0	0	8			8
	Bank 4	0	0	4			4
	Bank 5	5	7	4			4
	Bank 6	8	9	0			0
	Bank 7	0	0	0			0
	Bank 8	0	0	0			0
	Bank 9	0	0	0			0

Pin		LFMXO5-35	LFMXO5-35T		LFMXO5-65	LFMXO5-65T	
		BBG400	BBG256	BBG484	BBG400	BBG256	BBG484
Shared Comparator Channels (Pairs)	Bank 0	0	0	0			0
	Bank 1	0	0	0			0
	Bank 2	0	0	0			0
	Bank 3	0	0	3			3
	Bank 4	0	0	0			0
	Bank 5	3	3	3			3
	Bank 6	3	3	0			0
	Bank 7	0	0	0			0
	Bank 8	0	0	0			0
	Bank 9	0	0	0			0
Shared SGMII Channels (Pairs)	Bank 0	0	0	0			0
	Bank 1	0	0	0			0
	Bank 2	0	0	0			0
	Bank 3	0	0	0			0
	Bank 4	0	0	0			0
	Bank 5	0	0	2			2
	Bank 6	2	2	0			0
	Bank 7	0	0	0			0
	Bank 8	0	0	0			0
	Bank 9	0	0	0			0

6. Ordering Information

Lattice Semiconductor provides a wide variety of services for its products including custom marking, factory programming, known good die, and application specific testing. Contact your local sales representatives for more details.

6.1. Part Number Description

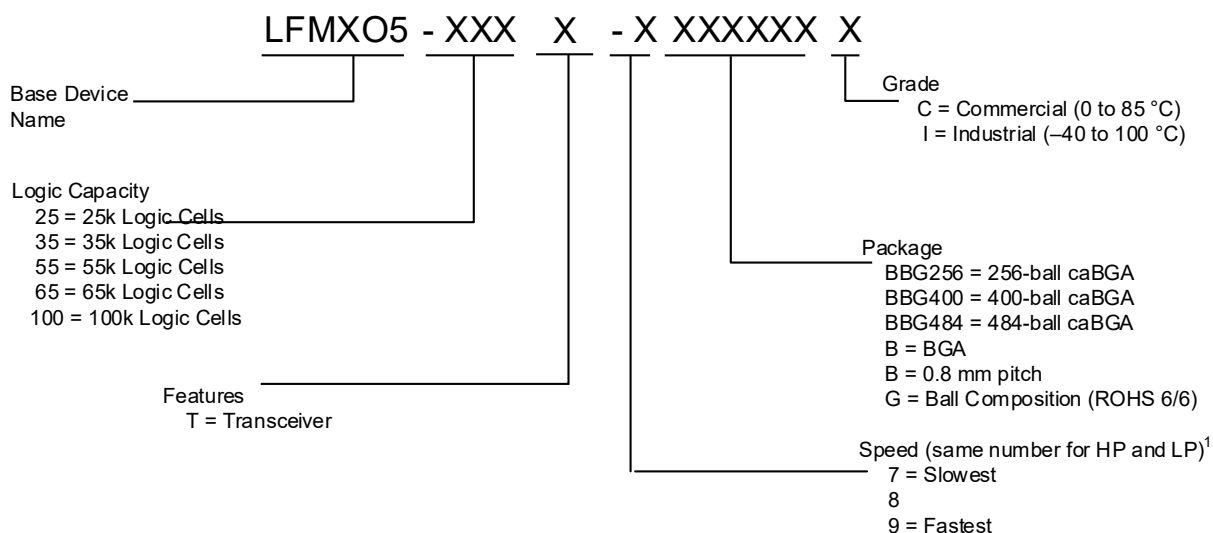

Note:

1. Input Comparator, ADC, EBR ECC, and DTR are only available in -8 (-C/I) and -9 (-C/I) speed and grade.

6.2. Ordering Part Numbers

MachXO5-NX devices have the top-side marking as shown in the examples below.



Figure 6.1. Top Marking Diagram

6.2.1. Commercial

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-25-7BBG256C	–7	256	Commercial	25
LFMXO5-25-8BBG256C	–8	256	Commercial	25
LFMXO5-25-9BBG256C	–9	256	Commercial	25
LFMXO5-25-7BBG400C	–7	400	Commercial	25
LFMXO5-25-8BBG400C	–8	400	Commercial	25
LFMXO5-25-9BBG400C	–9	400	Commercial	25
LFMXO5-55T-7BBG400C	–7	400	Commercial	55
LFMXO5-55T-8BBG400C	–8	400	Commercial	55
LFMXO5-55T-9BBG400C	–9	400	Commercial	55
LFMXO5-100T-7BBG400C	–7	400	Commercial	100
LFMXO5-100T-8BBG400C	–8	400	Commercial	100
LFMXO5-100T-9BBG400C	–9	400	Commercial	100

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-35-7BBG400C	–7	400	Commercial	35
LFMXO5-35-8BBG400C	–8	400	Commercial	35
LFMXO5-35-9BBG400C	–9	400	Commercial	35
LFMXO5-35T-7BBG484C	–7	484	Commercial	35
LFMXO5-35T-8BBG484C	–8	484	Commercial	35
LFMXO5-35T-9BBG484C	–9	484	Commercial	35
LFMXO5-35T-8BBG256C	–8	256	Commercial	35
LFMXO5-35T-9BBG256C	–9	256	Commercial	35

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-65-7BBG400C	–7	400	Commercial	65
LFMXO5-65-8BBG400C	–8	400	Commercial	65
LFMXO5-65-9BBG400C	–9	400	Commercial	65
LFMXO5-65T-7BBG484C	–7	484	Commercial	65
LFMXO5-65T-8BBG484C	–8	484	Commercial	65

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-65T-9BBG484C	–9	484	Commercial	65
LFMXO5-65T-8BBG256C	–8	256	Commercial	65
LFMXO5-65T-9BBG256C	–9	256	Commercial	65

6.2.2. Industrial

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-25-7BBG256I	–7	256	Industrial	25
LFMXO5-25-8BBG256I	–8	256	Industrial	25
LFMXO5-25-9BBG256I	–9	256	Industrial	25
LFMXO5-25-7BBG400I	–7	400	Industrial	25
LFMXO5-25-8BBG400I	–8	400	Industrial	25
LFMXO5-25-9BBG400I	–9	400	Industrial	25
LFMXO5-55T-7BBG400I	–7	400	Industrial	55
LFMXO5-55T-8BBG400I	–8	400	Industrial	55
LFMXO5-55T-9BBG400I	–9	400	Industrial	55
LFMXO5-100T-7BBG400I	–7	400	Industrial	100
LFMXO5-100T-8BBG400I	–8	400	Industrial	100
LFMXO5-100T-9BBG400I	–9	400	Industrial	100

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-35-7BBG400I	–7	400	Industrial	35
LFMXO5-35-8BBG400I	–8	400	Industrial	35
LFMXO5-35-9BBG400I	–9	400	Industrial	35
LFMXO5-35T-7BBG484I	–7	484	Industrial	35
LFMXO5-35T-8BBG484I	–8	484	Industrial	35
LFMXO5-35T-9BBG484I	–9	484	Industrial	35
LFMXO5-35T-8BBG256I	–8	256	Industrial	35
LFMXO5-35T-9BBG256I	–9	256	Industrial	35

Part Number	Speed	Pins	Temp.	Logic Cells (k)
LFMXO5-65-7BBG400I	–7	400	Industrial	65
LFMXO5-65-8BBG400I	–8	400	Industrial	65
LFMXO5-65-9BBG400I	–9	400	Industrial	65
LFMXO5-65T-7BBG484I	–7	484	Industrial	65
LFMXO5-65T-8BBG484I	–8	484	Industrial	65
LFMXO5-65T-9BBG484I	–9	484	Industrial	65
LFMXO5-65T-8BBG256I	–8	256	Industrial	65
LFMXO5-65T-9BBG256I	–9	256	Industrial	65

Supplemental Information

For Further Information

A variety of technical notes for the MachXO5-NX family are available.

- [ADC User Guide for Nexus Platform \(FPGA-TN-02129\)](#)
- [Advanced Embedded Security and Function Block User Guide for MachXO5-NX Devices \(FPGA-TN-02320\)](#)
- [I²C Hardened IP User Guide for Nexus Platform \(FPGA-TN-02142\)](#)
- [Lattice Memory Mapped Interface and Lattice Interrupt Interface User Guide \(FPGA-UG-02039\)](#)
- [MachXO5-NX Hardware Checklist \(FPGA-TN-02274\)](#)
- [MachXO5-NX High-Speed I/O Interface \(FPGA-TN-02286\)](#)
- [MachXO5-NX Programming and Configuration UG \(FPGA-TN-02271\)](#)
- [Memory User Guide for Nexus Platform \(FPGA-TN-02094\)](#)
- [Multi-Boot User Guide for Nexus Platform \(FPGA-TN-02145\)](#)
- [Single Event Upset \(SEU\) Report for Nexus Platform \(FPGA-TN-02174\)](#)
- [Soft Error Detection \(SED\)/Correction \(SEC\) User Guide for Nexus Platform \(FPGA-TN-02076\)](#)
- [sub-LVDS Signaling Using Lattice Devices \(FPGA-TN-02028\)](#)
- [sysCLOCK PLL Design and User Guide for Nexus Platform \(FPGA-TN-02095\)](#)
- [sysDSP User Guide for Nexus Platform \(FPGA-TN-02096\)](#)
- [sysI/O User Guide for Nexus Platform \(FPGA-TN-02067\)](#)
- [Power Management and Calculation for Certus-NX, CertusPro-NX and MachXO5-NX Devices \(FPGA-TN-02257\)](#)
- [Thermal Management \(FPGA-TN-02044\)](#)
- [Using TraceID \(FPGA-TN-02084\)](#)

For further information on interface standards refer to the following websites:

- JEDEC Standards (LVTTL, LVCMOS, SSTL) – www.jedec.org

Revision History

Revision 2.3, July 2026

Section	Change Summary
Architecture	- Updated Figure 2.24. Input Register Block for PIO on Top, Left, and Right Sides of the Device adding Note. - Updated Figure 2.26. Output Register Block on Top, Left, and Right Sides adding Note.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Updated Figure 3.14. Configuration Error Notification (1) adding t_{INIT_LOW}. - Added t_{INITL} and its related information to Table 3.44. sysCONFIG Port Timing Specifications.
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	- Updated Figure 4.14. Configuration Error Notification (2) adding t_{INIT_LOW}. - Added t_{INITL} and its related information to Table 4.46. sysCONFIG Port Timing Specifications.

Revision 2.2, May 2026

Section	Change Summary
Architecture	- Updated figure caption of Figure 2.22. Group of Two High Performance Programmable (HPIO) I/O Cells to the current adding (<i>HPIO</i>). - Updated figure caption of Figure 2.23. Wide Range Programmable (WRIO) I/O Cells to the current adding (<i>WRIO</i>). - Moved the following sub-sections from the original sysI/O Banking Scheme section to the newly added sysI/O Considerations section: - Typical sysI/O I/O Behavior During Power-up; - VREF1 and VREF2; - sysI/O Standards Supported by I/O Bank; - Hot Socketing. - Added guidance on WRIO power-up sequencing and pull-down requirements to the sysI/O Considerations section.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Table 3.3. Power Supply Ramp Rates: - added $t_{RAMP_VCCIOCFG}$ symbol; - added new note contents. - Added guidance on WRIO power-up sequencing and pull-down requirements in the Power up Sequence section. - Table 3.5. On-Chip Termination Options for Input Modes: removed LVCMOS12H and LVCMOS10H as well as their related information. - Table 3.40. ADC Specifications1: - removed $ENOB_{ADC}$ symbol and its related information; - corrected the Unit for ERR_{OFFSET_ADC} to the current $\% FS_{ADC}$. - Table 3.46. Test Fixture Required Components, Non-Terminated Interfaces: updated all $\geq$ to to in Test Condition.
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	- Table 4.1. Absolute Maximum Ratings: - updated the V_{CCAUX}, V_{CCAUXA}, $V_{CCAUXH3}$, $V_{CCAUXH4}$, $V_{CCAUXH5}$, $V_{CCAUXH6}$ symbol to the current; - updated the Conditions for V_{CCIO0}, 1, 2, 6, 7 and V_{CCIO3}, 4, 5 to the current; - newly added V_{CCIO0}, 1, 2, 3, 4, 7, 8, 9, 11 and V_{CCIO5}, 6 and their related information. - Table 4.2. Recommended Operating Conditions: - updated the Conditions for V_{CCAUX} to the current; - updated the $V_{CCAUXH3/4/5}$ to $V_{CCAUXH3/4/5/6}$ and updated its Condition to the current; - updated the Conditions for V_{CCIO} to the current. - Table 4.3. Power Supply Ramp Rates: - added $t_{RAMP_VCCIOCFG}$ symbol;

Section	Change Summary
	- added new note contents. - Added guidance on WRIO power-up sequencing and pull-down requirements in the Power up Sequence section. - Table 4.4. Power-On Reset: added V_{CCIO2} to parameter for V_{PORUP} symbol and updated the related device support information. - Table 4.5. On-Chip Termination Options for Input Modes: removed LVCMOS12H and LVCMOS10H as well as their related information. - Table 4.14. sysI/O Recommended Operating Conditions: updated the Supported Banks information to the current; - updated Note 1b, Note 1c, Note 1d, Note 3, Note 4, Note 7, and Note 9. - Table 4.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions): updated Note 5. - Table 4.17. I/O Resistance Characteristics (Over Recommended Operating Conditions): updated the Test Conditions for R_{DIFF} and SE Input Termination parameters to the current. - sysI/O Differential DC Electrical Characteristics: - updated the description adding HPIO and WRIO banks support information in the LVDS section; - updated Note 1 of Table 4.20. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions)1; - updated the description adding WRIO and HPIO banks support information in the SubLVDS/SubLVDSH (Output Only) section; - updated description adding HPIO bank support information in the SLVS section. - Table 4.40. ADC Specifications1: corrected the Unit for ERR_{OFFSET_ADC} to the current % FS_{ADC}. - Table 4.48. Test Fixture Required Components, Non-Terminated Interfaces: Updated all $\geq$ to to in Test Condition.
Pinout Information	Added <i>[T] = For single-ended signaling, use only PCLKT pins as primary CLK pads</i> to the description for PBxxx/PCLK[T,C][X-Y]_[0-3]/yyyy signal in Table 5.1. Signal Descriptions.
Ordering Information	Added temperature range for Commercial and Industrial grades to the Part Number Description.

Revision 2.1, July 2025

Section	Change Summary
General Description	- Added <i>SERDES PCIe Hard IP (T-suffix devices only)</i> to the Features section. - Updated package format to BBG256, BBG400, and BBG484 in - Table 1.2. MachXO5-NX Commercial/Industrial Family Selection Guide.
Architecture	- Added MachXO5-NX-35/T and MachXO5-NX-65/T devices support to the Overview section. - Newly added Figure 2.4. Simplified Block Diagram, MachXO5-NX-35/T and MachXO5-NX-65/T Devices (Top Level). - Updated the caption of Figure 2.9. Clocking for MachXO5-NX-35/T, MachXO5-NX-65/T, and MachXO5-NX-25 Devices to the current. - sysI/O Banking Scheme section: - updated description adding LFMXO5-35/T and LFMXO5-65/T parts support; - newly added Figure 2.34. sysI/O Banking of MachXO5-NX-35T/MachXO5-NX-65T Devices. - Table 2.12. Single-Ended I/O Standards Supported on Various Sides: updated Note contents adding MachXO5-NX-35/T and MachXO5-NX-65/T devices support. - Table 2.13. Differential I/O Standards Supported on Various Sides:

Section	Change Summary
	updated Note contents adding MachXO5-NX-35/T and MachXO5-NX-65/T devices support. - Table 2.14. UFM Size: added support for LFMXO5-35/T and LFMXO5-65/T parts support. - Pin Migration section: added MachXO5-NX-35/T and MachXO5-NX-65/T devices support. - Peripheral Component Interconnect Express (PCIe) section: updated to <i>MachXO5-NX T-suffix devices</i> support in the description. - Cryptographic Engine section: updated to <i>MachXO5-NX devices</i> support in the description
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	- Updated the section title adding <i>LFMXO5-35/T and LFMXO5-65/T</i> parts. - Newly added the Hardened PCIe Characteristics for LFMXO5-35/T and LFMXO5-65/T Parts section. - Updated the Hardened PCIe Characteristics for LFMXO5-55T and LFMXO5-100T Parts section title to current. - Table 4.37. Flash Download Time: - removed LFMXO5-25 and its related information from the table; - added LFMXO5-35/T and LFMXO5-NX-65/T parts support. - Table 4.38. Program and Erase Supply Current: - removed LFMXO5-25 and its related information from the table; - added LFMXO5-NX-35/T and LFMXO5-NX-65/T parts support.
Pinout Information	- Table 5.1. Signal Descriptions: - added LFMXO5-35/T and LFMXO5-65/T parts related information to V_{CCIOx} signal; - Table 5.2. Pin Information Summary of LFMXO5-25, LFMXO5-55T, and LFMXO5-100T and Table 5.3. Pin Information Summary of LFMXO5-35, LFMXO5-35T, LFMXO5-65, and LFMXO5-65T: - updated the package format to the current BBG256, BBG400, and BBG484.
Ordering Information	Removed Package information from the Commercial and the Industrial sections.

Revision 2.0, July 2025

Section	Change Summary
General Description	- Updated <i>ADC block with two SAR ADCs that sample simultaneously</i> and its sub-features to the current in the Features section. - Newly added Table 1.1. Specification Status for MachXO5-NX Devices Note: Information provided for the LFMXO5-35/T and LFMXO5-65/T parts is advance information and is subject to change. - Table 1.2. MachXO5-NX Commercial/Industrial Family Selection Guide: - updated the Device to <i>ADC Blocks with two SAR ADCs</i>¹; - added LFMX5-35/T and LFMXO5-65/T and their related information; - added 484 BBG package and its related information.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Table 3.4. Power-On Reset: Changed parameter to Power-On-Reset ramp-down trip point (Monitoring VCC and VCCAUX) for V_{PORDN} Symbol. - Table 3.35. sysCLOCK PLL Timing (VCC = 1.0 V): Removed f_{PF} < 20 MHz from t_{IPJIT} symbol. - Table 3.44. sysCONFIG Port Timing Specifications: - changed t_{PROGRAMN} to t_{PROGRAMN_L}; - newly added t_{PROGRAMN_H} and its related value.
DC and Switching Characteristics for LFMXO5-55T/100T Commercial and Industrial	- Table 4.35. sysCLOCK PLL Timing (VCC = 1.0 V): Removed f_{PF} < 20 MHz from t_{IPJIT} symbol. - Table 4.46. sysCONFIG Port Timing Specifications: - changed t_{PROGRAMN} to t_{PROGRAMN_L};

Section	Change Summary
	- newly added $t_{\text{PROGRAMN_H}}$ and its related value; - changed the Max value from 55 to — for $t_{\text{INIT_HIGH}}$; - changed $t_{\text{DONE_LOW}}$ MAX value to 55; - changed $t_{\text{DONE_HIGH}}$ MAX value to 2; t_{IODISS}: - changed its original Min value 50 to —; - updated its Max value to 125.
Pinout Information	- Renamed the table title to the current for Table 5.2. Pin Information Summary of LFMXO5-25, LFMXO5-55T, and LFMXO5-100T. - Newly added Table 5.3. Pin Information Summary of LFMXO5-35, LFMXO5-35T, LFMXO5-65, and LFMXO5-65T.
Ordering Information	- Updated Figure 6.1. Top Marking Diagram. - Newly added 35 and 65 logic cells, and BBG484 to diagram in the Part Number Description section. - Newly added -35, 35T, -65, -65T packages and data to the Commercial and the Industrial sections.

Revision 1.9, May 2025

Section	Change Summary
All	- Added the following note where applicable: The SGMII interface using LVDS I/O has limitations when operating across the full specified temperature range. Lattice recommends using alternative interfaces, such as SERDES or RGMII, for designs requiring Gigabit Ethernet. Refer to the Knowledge Database article for details. Contact your local Lattice sales representative for more information. - Changed I²C to I2C globally.
Acronyms in this Document	Added SERDES and RGMII to the list.
Architecture	Removed AES-CBC from <i>Advanced Encryption Standard 256 bit</i> of the Cryptographic Engine section.
Pinout Information	Table 5.1. Signal Descriptions: Moved the description <i>POR monitors this supply voltage</i> from signal V_{CCAUXA} to V_{CCAUX}.

Revision 1.8, April 2025

Section	Change Summary
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	Table 3.34. External Switching Characteristics ($V_{\text{CC}} = 1.0 \text{ V}$): Adjusted all the data for the parameters of Generic DDRX2 Inputs/Outputs with Clock and Data Centered at Pin (GDDR2_RX/TX.ECLK.Centered) using PCLK Clock Input – Figure 3.7 and Figure 3.9.

Revision 1.7, September 2024

Section	Change Summary
All	Changed SerDes to SERDES across the document.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Newly added Figure 3.14. Configuration Error Notification (1). - Figure 3.15. Slave SPI/I2C/I3C POR/REFRESH Timing: - removed t_{ICFG} parameter; - changed $t_{\text{ACT_CRESETB_H}}$ to $t_{\text{ACT_PROGRAMN_H}}$. - Updated the following symbol names in Figure 3.17. Slave SPI Configuration Timing: - from $t_{\text{CO_MISO}}$ to $t_{\text{CO_SSO}}$; - from $t_{\text{EN_MISO}}$ to $t_{\text{EN_SSO}}$; - from $t_{\text{DIS_MISO}}$ to $t_{\text{DIS_SSO}}$; - from $t_{\text{SU_MOSI}}$ to $t_{\text{SU_SSI}}$;

Section	Change Summary
	- from t_{HD_MOSI} to t_{HD_SSI}. - Table 3.44. sysCONFIG Port Timing Specifications: - updated the Min value of t_{CO_SSO}, t_{EN_SSO}, and t_{DIS_SSO} to 3.0; - updated the Max value of t_{CO_SSO}, t_{EN_SSO}, and t_{DIS_SSO} to 16; - removed the original f_{CCLK} symbol and its related data; - newly added f_{CCLK_W} and f_{CCLK_R} symbols and their related data; - newly added Notes 1, 2, 3, 4, and 5.
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	- Removed a Note about preliminary data from the introductory paragraph of this section. - Table 4.14. sysI/O Recommended Operating Conditions: Corrected wrong bank information in Notes 1, 3, 4, and 7. - Table 4.46. sysCONFIG Port Timing Specifications: - updated the Min value of t_{CO_SSO}, t_{EN_SSO}, and t_{DIS_SSO} to 3.0; - updated the Max value of t_{CO_SSO}, t_{EN_SSO}, and t_{DIS_SSO} to 30; - removed the original f_{CCLK} symbol and its related data; - newly added f_{CCLK_W} and f_{CCLK_R} symbols and their related data; - newly added Notes 1, 2, 3, 4, and 5. - Updated t_{INIT_HIGH} Typ. value to 50 in Table 4.48. Test Fixture Required Components, Non-Terminated Interfaces. - Newly added Figure 4.14. Configuration Error Notification (2). - Figure 4.15. Slave SPI/I2C/I3C POR/REFRESH Timing: - removed t_{ICFG} parameter; - changed $t_{ACT_CRESETB_H}$ to $t_{ACT_PROGRAMN_H}$. - Updated the following symbol names in Figure 4.17. Slave SPI Configuration Timing: - from t_{CO_MISO} to t_{CO_SSO}; - from t_{EN_MISO} to t_{EN_SSO}; - from t_{DIS_MISO} to t_{DIS_SSO}; - from t_{SU_MOSI} to t_{SU_SSI}; - from t_{HD_MOSI} to t_{HD_SSI}.
Pinout Information	Updated bank information for VCCIOx in Table 5.1. Signal Descriptions.

Revision 1.6, May 2024

Section	Change Summary
General Description	Changed <i>Endpoint and Root complex</i> to <i>Endpoint</i> in the Features section.
Architecture	Changed <i>Endpoint and Root complex</i> to <i>Endpoint</i> in the Peripheral Component Interconnect Express (PCIe) section.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Removed <i>and follow the SMIA 1.0, Part 2: CCP2 Specification</i> from the SubLVDS (Input Only) section. - Table 3.34. External Switching Characteristics (VCC = 1.0 V): - updated the unit for t_{DVB_GDDR4} symbol; - updated description and unit for t_{DQVA_GDDR4} symbol; - updated description for f_{MAX_GDDR4} symbol; - updated description for f_{PCLK} symbol. - Table 3.40. ADC Specifications1: - removed DC_{CLK_ADC} symbol from the table; - for f_{INPUT_ADC} symbol, changed the condition to @ Sampling Frequency = 1 Mbps; - for R_{IN_ADC} symbol, changed the condition to —; - newly added Note 4 <i>Internal voltage reference is only for internal testing purpose. It is not recommended for customer design. User should always use the part with external reference voltage.</i>

Section	Change Summary
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	- Removed <i>and follow the SMIA 1.0, Part 2: CCP2 Specification</i> from the SubLVDS (Input Only) section. - Table 4.34. External Switching Characteristics ($V_{CC} = 1.0\text{ V}$): - updated the unit for t_{DVB_GDDR4} symbol; - updated description and unit for t_{DQVA_GDDR4} symbol; - updated description for f_{MAX_GDDR4} symbol; - updated description for f_{CLK} symbol. - Table 4.40. ADC Specifications¹: - removed DC_{CLK_ADC} symbol from the table; - for f_{INPUT_ADC} symbol, changed the condition to @ Sampling Frequency = 1 Mbps. - for R_{IN_ADC} symbol, changed the condition to —. - newly added Note 4 <i>Internal voltage reference is only for internal testing purpose. It is not recommended for customer design. User should always use the part with external reference voltage.</i>
Pinout Information	Added <i>Total Differential I/O</i> area and related data to Table 5.2. Pin Information Summary.

Revision 1.5, October 2023

Section	Change Summary
Disclaimers	Updated disclaimers.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	Updated t_{INIT_HIGH} , t_{DONE_LOW} , t_{DONE_HIGH} , and t_{IODISS} specifications in Table 3.44. sysCONFIG Port Timing Specifications.

Revision 1.4, May 2023

Section	Change Summary
All	Separated the contents and data for LFMXO5-25 and LFMXO55/100T devices support.
General Description	Updated Table 1.2. MachXO5-NX Commercial/Industrial Family Selection Guide changing Packages Sizes for LFMXO5-25, LFMXO5-55T, LFMXO5-100T devices by reducing 1 for not counting JTAG_EN.
DC and Switching Characteristics for LFMXO5-25 Commercial and Industrial	- Changed the section title to the current. - Removed the Note regarding subject to change without prior notice. - Updated contents and data whole section wise for the LFMXO5-25 support only. - Removed the original Differential LVSTLD (Output Only), Hardened PCIe Characteristics section.
DC and Switching Characteristics for LFMXO5-35/T, LFMXO5-65/T, and LFMXO5-55T/100T Commercial and Industrial	Newly added section.
Pinout Information	Updated bank information for JTAG_EN in Table 5.1. Signal Descriptions.

Revision 1.3, April 2023

Section	Change Summary
All	Added LPDDR4 for the MachXO5-NX-55T and MachXO5-NX-100T devices support.
Acronyms in This Document	Added EMIF to the list.
General Description	Added LPDDR4 to the description and to the Features section. Added EMIF and relevant DDR and LPDDR support to Table 1.1. MachXO5-NX Commercial/Industrial Family Selection Guide.
Architecture	Added LPDDR4 and Internal VREF support for LPDDR4 to the Overview section.

Section	Change Summary
	- Added LPDDR4 to the DDR Memory Support section including Table 2.9. DQSBUF Port List Description. - sysI/O Buffer section: - added LVSTL and differential LVSTL to the description; - Table 2.10. Single-Ended I/O Standards: added LVSTL_I and LVSTL_II standards and their related data; - Table 2.11. Differential I/O Standards: added LVSTLD_I and LVSTLD_II standards and their related data; - Table 2.12. Single-Ended I/O Standards Supported on Various Sides: added LVSTL I, II standard and the related data; - Table 2.13. Differential I/O Standards Supported on Various Sides: added LVSTLD_I and LVSTLD_II standards and their related data.
DC and Switching Characteristics for Commercial and Industrial	- Table 3.1. Absolute Maximum Ratings: added V_{CCSD}^*, V_{CCSDCK}, $V_{CCADC18}$, and $V_{CCAUXSDQ}^*$ symbols and the related data. - Table 3.2. Recommended Operating Conditions: added SerDes Block External Power Supplies including V_{CCSD}^*, V_{CCSDCK}, $V_{CCPLLSD}^*$, and $V_{CCAUXSDQ}^*$ symbols and the related data. - Table 3.5. On-Chip Termination Options for Input Modes: added LVSTL_I and LVSTL_II I/O Type and the related data. - Table 3.14. sysI/O Recommended Operating Conditions: - added LVSTL_I and LVSTL_II to the Single-ended standard and the related data, and also added Note 9 for these two standards; - added LVSTLD_I and LVSTLD_II to the Differential standard, as well as all the related data, and pointed to Note 5. - Table 3.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions)³: added LVSTL_I and LVSTL_II to the Input/Output Standard as well as the related data. - Newly added the Differential LVSTLD (Output Only) section. - Table 3.30. Maximum I/O Buffer Speed1, 2, 3, 4, 7: - added LVSTL_I and LVSTL_II to the Single-Ended Maximum sysI/O Input Frequency buffer as well as the related data; - added LVSTLD_I and LVSTLD_II to the Differential Maximum sysI/O Input Frequency buffer as well as the related data; - added LVSTL_I and LVSTL_II to the Single-Ended Maximum sysI/O Output Frequency buffer as well as the related data; - added LVSTLD to the Differential Maximum sysI/O Output Frequency buffer as well as the related data; Added LPDDR4 to Note 8.

Revision 1.2, February 2023

Section	Change Summary
All	This version is mainly based on the previous internal-released Version 1.1.1.
Acronyms in This Document	Removed MLVDS from the list.
General Description	- Removed LPDDR2 and LPDDR3 from the introductory description. - Features: - Programmable Architecture: updated to 27k to 96k logic cells, 20 to 156 18×18 multipliers (in sysDSP blocks), 1.9 Mb to 7.3 Mb of embedded memory blocks (EBR, LRAM), and removed LPDDR2/LPDDR3; - Newly added PCIe hard IP support features; - Flexible memory resources: updated to 184 to 639 kbit distributed RAM; - Table 1.1. MachXO5-NX Commercial/Industrial Family Selection Guide: newly added LFMXO5-55T and LFMXO5-100T and their related data.
Architecture	Overview:

Section	Change Summary
	- newly added <i>The MachXO5-NX- 55T and MachXO5-NX-100T FPGAs feature one hard PCIe link layer IP block which supports PCIe Gen1, Gen2 with 1 or 2 x1 configuration.</i> - newly added Figure 2.2. Simplified Block Diagram, MachXO5-NX-55T Device (Top Level) and Figure 2.3. Simplified Block Diagram, MachXO5-NX-100T Device (Top Level). - removed LPDDR2/LPDDR3 support. - Clocking Structure: - newly added Figure 2.9. Clocking for MachXO5-NX-55T/MachXO5-NX-100T Devices. - Primary Clocks: updated to <i>The primary clock network is divided into two or four clock domains depending on the device density.</i> - Edge Clock: updated to <i>Other bottom side banks are similar.</i> - Clock Dividers: updated to <i>There are from one (1) to two (2) Primary Clock Divider (PCLKDIV) and which are located in the DCS_CMUX block(s) at the center of the device. There are up to twelve (12) ECLKDIV dividers per device, locate near the bottom high-speed I/O banks.</i> - Clock Center Multiplexer Blocks: - newly added <i>For 50T/100T device, each DCS_CMUX block contains four (4) DCSMUX blocks, two (2) PCLKDIV, two (2) DCS block, and four (4) CMUX blocks.</i> - newly added Figure 2.12. DCS_CMUX Diagram for MachXO5-NX-55T/MachXO5-NX-100T Devices and Figure 2.16. DDRDLL Architecture for MachXO5-NX-55T/MachXO5-NX-100T Devices. - DDR Memory Support: removed LPDDR2/LPDDR3 support. - sysl/O Buffer: - sysl/O Banking Scheme: - newly added contents for MachXO5-NX-55T/MachXO5-NX-100T support; - newly added Figure 2.32. sysl/O Banking of MachXO5-NX-55T/MachXO5-NX-100T Devices; - newly added Note contents of MachXO5-NX-55T/MachXO5-NX-100T to Table 2.12. Single-Ended I/O Standards Supported on Various Sides and Table 2.13. Differential I/O Standards Supported on Various Sides. - Hot Socketing: updated the original bank related description to <i>Top/Left/Right Bank wide range I/O (excluding INITN/DONE) are fully hot socketable, while Bottom Bank are not supported.</i> - User Flash Memory (UFM): - removed I2C Interface from the description; - Table 2.14. UFM Size: newly added MachXO5-NX-55T and MachXO5-NX-100T related data. - Pin Migration: newly added <i>The MachXO5-NX-55T device can be migrated to the MachXO5-NX-100T device.</i> - Peripheral Component Interconnect Express (PCIe): newly added section. - Cryptographic Engine: modified the description of the CRE main engine support for MachXO5-NX-55T and MachXO5-NX-100T devices.
DC and Switching Characteristics for Commercial and Industrial	- External Switching Characteristics,: - removed LPDDR2/LPDDR3, t_{DVBQ_LPDDR2}, t_{DVBQ_LPDDR3}, t_{DVADQ_LPDDR2}, t_{DVADQ_LPDDR3}, f_{DATA_LPDDR2}, f_{DATA_LPDDR3}, $f_{MAX_ECLK_LPDDR2}$, $f_{MAX_ECLK_LPDDR3}$, $f_{MAX_SCLK_LPDDR2}$, $f_{MAX_SCLK_LPDDR3}$, t_{DQVBS_LPDDR2}, t_{DQVBS_LPDDR3}, t_{DQVAS_LPDDR2}, and t_{DQVAS_LPDDR3} from Memory Interface of Table 3.34. External Switching Characteristics (VCC = 1.0 V); - removed LPDDR2 and LPDDR3 timing support from Note 2 of Table 3.34. External Switching Characteristics (VCC = 1.0 V) . - Flash Download Time: newly added data for LMF XO5-55T and LMF XO5-100T to Table 3.37. Flash Download Time. - Flash Program and Erase Current: newly added data for LMF XO5-55T and LMF XO5-100T

Section	Change Summary
	to Table 3.38. Program and Erase Supply Current. sysCONFIG Port Timing Specifications: removed t_{ACT_CCLK} and t_{ACT_SCL} from Figure 3.14. Slave SPI/I2C/I3C POR/REFRESH Timing and Figure 3.15. Slave SPI/I2C/I3C PROGRAMN Timing.
Pinout Information	- Table 4.1. Signal Descriptions: - newly added V_{SSD}, V_{SSADC}, V_{CCSDX}, V_{CCSDCK}, $V_{CCPLLSDX}$, $V_{CCAUXSDQX}$; - changed V_{CC} to V_{CG}, V_{CCECLK}. - Table 4.2. Pin Information Summary: - newly added LFMXO5-55T 400 BBG and LFMXO5-100T 400 BBG families and their related data; - newly added power pins $V_{CCAUXSDQX}$, V_{CCSDX}, and $V_{CCPLLSDX}$, and GND pin V_{SSSDQZ}, and Dedicated SerDes Pins to both LFMXO5-25 256 BBG and LFMXO5-25 400 BBG.
Ordering Information	- Part Number Description: updated reflecting the most recent part number. - Ordering Part Numbers: added available LFMX5-55T and LFMXO5-100T parts to both Commercial and Industrial tables.

Revision 1.0, October 2022

Section	Change Summary
General Description	Updated processing features to include 27k logic cells in general description, Features, and in Table 1.1. MachXO5-NX Commercial/Industrial Family Selection Guide.
Architecture	Removed <i>100 k write cycles</i> from the User Flash Memory (UFM) section.
DC and Switching Characteristics for Commercial and Industrial	- In the Power up Sequence section: - Table 3.4. Power-On Reset: updated all the values for both V_{PORUP} and V_{PORDN} symbols. - Newly added the Programming /Erase Specifications section and Table 3.7. Programming/Erase Specifications. - In the sysI/O Single-Ended DC Electrical Characteristics3 section: - Table 3.15. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions): updated the LVTTL33/LVCMOS33 data. - Table 3.16. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions)3: updated LVCMOS18H and LVCMOS10H data. - Table 3.17. I/O Resistance Characteristics (Over Recommended Operating Conditions): updated the Min value to 65 for SE Input Termination. - Newly added Table 3.18. VIN Maximum Overshoot/Undershoot Allowance – Wide Range1,2 and Table 3.19. VIN Maximum Overshoot/Undershoot Allowance – High Performance1,2. - In the sysI/O Differential DC Electrical Characteristics section: - Table 3.21. LVDS25E DC Conditions: updated the Typical value to 6.03 for IDC parameter. - Table 3.29. Soft D-PHY Data-Clock Timing Specifications: updated Min and Max value for $T_{SKEW[TLIS]}$ and $T_{HOLD[RX]}$ symbols. - In the Maximum sysI/O Buffer Speed section: - Table 3.30. Maximum I/O Buffer Speed1, 2, 3, 4, 7: updated the Max value to 250 for the HSTL15 buffer, changed to HSUL12D buffer in both Maximum sysI/O Input Frequency and Maximum sysI/O Output Frequency. - In the Typica Building Function Performance section: - Table 3.31. Pin-to-Pin Performance: updated Typ.@ $V_{CC} = 1.0$ V values for all the functions. - Table 3.32. Register-to-Register Performance1, 3, 4: updated Typ.@ $V_{CC} = 1.0$ V values for all the Basic, Embedded Memory, Large Memory, Distributed Memory functions. - In the LMMI section:

Section	Change Summary
	- Table 3.33. LMMI FMAX Summary: updated all the f_{MAX} values. - In the External Switching Characteristics section: - Table 3.34. External Switching Characteristics (VCC = 1.0 V): - global change to all the values for all the parameters; - changed to $t_{H(LTR)}$ parameter; - newly added $t_{H(Bottom)}$, $t_{H_DEL(LTR)}$, $t_{H_DEL(Bottom)}$ parameters; - changed to $t_{SUPLL(LTF \text{ except Bank1})}$ parameter; - newly added $t_{SUPLL(Bank1)}$, $t_{SUPLL(Bottom)}$, $t_{HPLL(LTR)}$ parameters; - changed to $t_{HPLL(Bottom)}$ parameter; - newly added Generic DDRX1 Inputs/Outputs with Clock and Data Centered at Pin (GDDR1_RX/TX.SCLK.Centered) using PCLK Clock Input – Figure 3.7 and Figure 3.9 Bottom and Generic DDRX1 Inputs/Outputs with Clock and Data Aligned at Pin (GDDR1_RX/TX.SCLK.Aligned) using PCLK Clock Input – Figure 3.8 and Figure 3.10 Bottom parameters and their related values; - updated Note 2; - newly added Note 6 for t_{SKEW_PRI} and t_{SKEW_EDGE} parameters. - In the sysCLOCK PLL Timing (VCC = 1.0 V) section: - Table 3.35. sysCLOCK PLL Timing (VCC = 1.0 V): - removed footnote from f_{PFD} parameter; - indicated t_{PH} to Note 4; - removed and added conditions in t_{OPJIT} parameter to accurately reflect PLL jitter performance; - updated all the values for all the parameters. - In the Internal Oscillators Characteristics section: - Table 3.36. Internal Oscillators (VCC = 1.0 V): updated all the values for all the symbols. - In the Flash Download Time section: - Table 3.37. Flash Download Time: updated typ. value for the $t_{REFRESH}$ symbol. - Newly added the Flash Program and Erase Current section and Table 3.38. Program and Erase Supply Current. - In the User I2C Characteristics section: - Table 3.39. User I2C Specifications (VCC = 1.0 V): updated all the values for all the symbols. - In the sysCONFIG Port Timing Specifications section: - Table 3.44. sysCONFIG Port Timing Specifications: updated all the values for all the symbols. - In the JTAG Port Timing Specifications section: - Table 3.45. JTAG Port Timing Specifications: updated all the values for all the symbols.
Pinout Information	- Table 4.2. Pin Information Summary: - updated all the values for VCCIO LFMXO5-25 400 BBG; - updated the number of Bank 1 user I/O pins for LFMXO5-25 256 BBG.

Revision 0.82, September 2022

Section	Change Summary
Pinout Information	- In Table 4.1. Signal Descriptions: - changed the Bank to 2 for PRxxx/TDO/SSO, PRxxx/TDI/SSI, PRxxx/TMS/SCSN, and PRxxx/TCK/SCLK signals; - changed the Bank to 1 for PTxxx/PROGRAMN, PTxxx/INITN and PTxxx/DONE signals.

Revision 0.81, August 2022

Section	Change Summary
Architecture	Changed section header to SGMII TX/RX and updated contents.
DC and Switching Characteristics for Commercial and Industrial	- Updated Table 3.30. Maximum I/O Buffer Speed1, 2, 3, 4, 7. Corrected footnote reference of Differential to 8. - Added DSP functions and adjusted footnotes in Table 3.32. Register-to-Register Performance1, 3, 4. Corrected t_{PH} parameter footnote in Table 3.35. sysCLOCK PLL Timing (VCC = 1.0 V).
All	- Added links to referenced documents. - Removed product name from headings and captions of figures and tables. - Minor changes in style and formatting.

Revision 0.80, May 2022

Section	Change Summary
All	Globally changed Control Jedi-D6 to MachXO5-NX.
General Description	- Newly changed to Dual ADC – 1 MSPS, 12-bit SAR with Simultaneous Sampling. - Newly added note. Updated UFM value in Table 1.1. MachXO5-NX Commercial/Industrial Family Selection Guide.
Architecture	- In the sysMEM Memory section: - Changed to EBR also provides a build in ECC engine in select speed grades. - Updated Figure 2.25. DQS Control and Delay Block (DQSBUF). - Globally updated Table 2.9. DQSBUF Port List Description. - In the Analog Interface section: - Changed to In select speed grades, the MachXO5-NX family provides an analog interface.... - In the Device Configuration section: - Changed the Master SPI booting sequence to self-download mode. - Changed to In self-download mode, the FPGA boots from an external SPI boots from on-chip flash. - In the User Flash Memory (UFM) section: - Updated the non-volatile storage data to 15,360 kb. - Updated all the values in Table 2.14. MachXO5-NX UFM Size. - In the Pin Migration section: - Changed the section title from Density Shifting to <i>Pin Migration</i>.
DC and Switching Characteristics for Commercial and Industrial	- Removed Bank 10 and Bank 11 from Table 3.1. Absolute Maximum Ratings and Table 3.2. Recommended Operating Conditions. - Updated Note 1 contents of Table 3.5. On-Chip Termination Options for Input Modes. - General update to Table 3.6. Hot Socketing Specifications for GPIO. - General value update for Min., Typ. and Max. in Table 3.7. DC Electrical Characteristics – Wide Range (Over Recommended Operating Conditions) and Table 3.8. DC Electrical Characteristics – High Speed (Over Recommended Operating Conditions). - Updated Note format in Table 3.9. Capacitors – Wide Range (Over Recommended Operating Conditions) and Table 3.10. Capacitors – High Performance (Over Recommended Operating Conditions). - General update to Table 3.13. sysI/O Recommended Operating Conditions, Table 3.14. sysI/O DC Electrical Characteristics – Wide Range I/O (Over Recommended Operating Conditions), and Table 3.15. sysI/O DC Electrical Characteristics – High Performance I/O (Over Recommended Operating Conditions). - In the sysI/O Differential DC Electrical Characteristics section: - General update to the LVDS, SubLVDS/SubLVDSSEH (Output Only) sections. - General update to:

Section	Change Summary
	- Table 3.17. LVDS DC Electrical Characteristics (Over Recommended Operating Conditions) - Table 3.18. LVDS25E DC Conditions - Table 3.19. SubLVDS Input DC Electrical Characteristics (Over Recommended Operating Conditions) - Table 3.20. SubLVDS Output DC Electrical Characteristics (Over Recommended Operating Conditions) - Table 3.21. SLVS Input DC Characteristics (Over Recommended Operating Conditions) - Table 3.22. SLVS Output DC Characteristics (Over Recommended Operating Conditions) - Table 3.23. Soft D-PHY Input Timing and Levels - Table 3.24. Soft D-PHY Output Timing and Levels - Table 3.25. Soft D-PHY Clock Signal Specification - Table 3.26. Soft D-PHY Data-Clock Timing Specifications - Table 3.27. MachXO5-NX Maximum I/O Buffer Speed - Table 3.28. Pin-to-Pin Performance - Table 3.37. ADC Specifications - Table 3.38. Comparator Specifications - Table 3.39. DTR Specifications - Table 3.40. SGMII Rx - Table 3.41. MachXO5-NX sysCONFIG Port Timing Specifications - Removed the original Figure 3.14. Master SPI PRO/REFRESH Timing, Figure 3.16. Master SPI PROGRAMN Timing, Figure 3.20. Master SPI Wake-Up Timing,
Pinout Information	Updated the Bank and description for VCCAUX and VCCIOx in In the Signal Descriptions section.
Ordering Information	- Newly added note to the MachXO5-NX Part Number Description section. - Updated the top marking diagram in the Ordering Part Number section.
Supplemental Information	Updated document list.

Revision 0.72, December 2021

Section	Change Summary
General Description	- Removed 52k logic cells support and related contents. - In the Features section: - changed the programmable sysI/O (High Performance and Wide Range I/O) range to “200 to 300”; - changed the small footprint package option to “14 × 14 mm to 17 × 17 mm”; - changed to “up to 1.4 Mb sysMEM Embedded Block RAM (EBR)” in Flexible memory resources; changed to “80 kbit distributed RAM” in Flexible memory resources.
Architecture	Removed the original Figure 2.2 Simplified Block Diagram, Control Jedi-D6-55 Device (Top Level) from the Overview section.
Pinout Information	Removed all LFMXO5-55 information from the Pin Information Summary section.
Ordering Information	- Removed 55k logic cells capacity from the Part Number Description section. - Removed 484 package from the Part Number Description section.

Revision 0.71, October 2021

Section	Change Summary
General Description	Changed <i>Configuration to Non-volatile Configuration</i> in the Features section.
Architecture	Added description regarding DSP blocks and sysMEM EBR blocks for Jedi-D6 25 device to the Overview section.

Section	Change Summary
	Updated Figure 2.1. Simplified Block Diagram, MachXO5-NX-25 Device (Top Level) to show non-volatile configuration and security, and on-chip user flash. Updated description regarding image configuration in the User Flash Memory (UFM) section.
Pinout Information	Added “if not used, tie to ground” to the description for Dedicated ADC I/O Pins, both ADC_REF and ADC_DP/N, in the Signal Descriptions section.
DC and Switching Characteristics for Commercial and Industrial	Removed the hyperlink of the D6-Control Product Family Qualification Summary in the ESD Performance section.

Revision 0.70, October 2021

Section	Change Summary
All	Initial Advance release



www.latticesemi.com